PHOTOART VISUAL SERVICE 840 NO. PLANKINTON AVE. MILWAUKEE 3, WISCONSIN


Bell & Howell / Canon

World Famous 35mm
Photographic Products


Bell & Howell
7100 McCormick Rd.
Chicago 45, III.

Bell & Howell Canon

Canonet 19

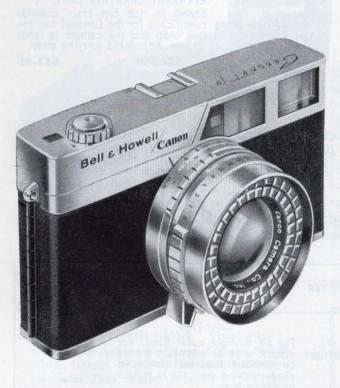

Data Center Viewfinder

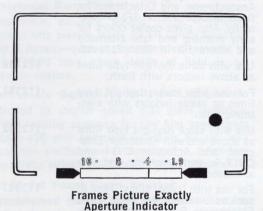

ULTIMATE DEVELOPMENT IN 35mm STILL CAMERAS

Now, push button photography comes of age from Bell & Howell/Canon. The Canonet 1.9...built to the professional standards of the leaders of quality. Convenience and simplicity, the ability to merely aim, and snap a perfectly exposed picture...every time!

A camera that not only warns you, but stops you from taking an improperly exposed picture... unless you want to. Never before has professional, 35mm photography been so easy...so convenient...so rewarding.

- FULLY AUTOMATIC EXPOSURE SYSTEM. Extremely sensitive "Around the Lens" Electric Eye assures perfect exposure control . . . won't let you take a bad picture. Shutter locks if lighting is incorrect. Completely automatic with film speeds ASA 10-200 plus manual.
- "DATA CENTER" VIEWFINDER. Frames exact picture area . . . shows you the lens setting . . . warns you of improper lighting . . . and shows how to correct for perfect exposure. Parallax corrected.
- BETWEEN THE LENS SHUTTER. Shutter speeds from 1 second to 1/500 second plus Bulb and Time Exposure. Stop motion or take beautiful night scenes. Fully synchronized for flash bulbs or electronic flash.
- BUILT-IN SELF TIMER. Allows 10 second time to get into the picture yourself before shutter is snapped.
- SHARP 45m f/1.9 LENS. Color corrected semi-wide angle lens allows greater coverage and produces brilliant color or sparkling black and white pictures.
- CONVENIENT, BUILT-IN RANGEFINDER. Double image type rangefinder is quick and easy to use. Sets distance accurately from 3' to infinity to produce corner to corner sharpness.
- OTHER CONVENIENT—QUALITY FEATURES. Self-resetting exposure counter...single stroke "trigger lever" film wind...rapid crank system film rewind.

PROFESSIONAL...PUSH-BUTTON PHOTOGRAPHY

CANONET 1.9

Light Level Indicator

Model 50C

\$112.95

CANONET 1.9 Kit

Includes camera, carrying case and flash unit.

011517

\$134.85

- ORDERING INFORMATION -

PROFESSIONAL VERSATILITY . . . AUTOMATICALLY



BELL & HOWELL CONTOUR CARRYING CASE

Luxury Carrying Case for Canonet Camera. Comfortable contour design. Plenty of room for accessories. Top grain cowhide. Rugged, heavy-duty zipper. Hand and shoulder strap.

040361

\$16.95

MODEL J-2 FLASH GUN

Dependable, capacitor, fan folding flash gun for either baseless or #5 flash bulbs. Convenient built-in exposure guide and test light. Fits on accessory sleeve of camera. Continental terminal. (With case and 100 MFD Capacitor)

112539

\$9.95



BELL & HOWELL EVEREADY CARRYING CASE

Styled in rich top grain cowhide specifically for the Canonet camera. One snap and the camera is ready for use. Adjustable carrying strap.

040360

\$11.95

CANONET LENS HOOD

Designed for the Canonet to protect the lens and the Electric Eye from stray light. Fits over front of lens barrel. Can be used with any of the above filters without special adapters.

112400

\$3.95

CANONET FILTERS...55mm screw-in filters. High quality optical glass. Designed for the Canonet to fit over lens and electric eye for automatic light compensation. No need to worry about filter factors.

FILTER	USES AND EFFECTS	ORDERING INFORMATION \$9.25	FILTER	USES AND EFFECTS	ORDERING INFORMATION \$9.25
omecte	For Black and White Film	and shows from to		Color Film	
Y1	Absorbs ultraviolet and some blue violet rays, suited for general photography. Renders red and yellow subjects lighter than the eye sees them. Darkens sky to bring out	112560	1A Skylight	For all daylight color films. For distant snow or mountain scenes on overcast day, and for open shade under a clear sky to reduce excessive blue.	112349
	clouds and emphasizes contrast in sea scenes.		80C	Use with daylight Kodachrome, Anscochrome, and Ektachrome for	112353
Y3	Has same effects as Y1 but emphasizes it.	112561		flash (except SM or SF) photography. Also gives cooler colors for early morning and late afternoon	
G1	Passes green light freely. Darkens yellow, blue, orange, and red subjects.	112563	80B	and where fill in flash is used. Use with same daylight type films as above indoors with flash.	112350
01	Absorbs ultraviolet, blue and some green lights. Renders blue subjects considerably darker, and yel-	112562	81A	For use with same daylight type films as above indoors with electronic flash.	112351
	low and red subjects lighter than the eye sees them. Most effective for distant landscapes.		82A	Use with same daylight type films as above and with Kodacolor, Ektacolor, and Agfacolor CN14 and	112352
R1	For panchromatic and infra-red films. Turns blue subjects darker,	112564		CN17 in early morning and late afternoon.	
	and red and green subjects lighter. Gives moonlight effect on land- scape scenes.		85B	For use with indoor films, Type B, such as Ektachrome B, High speed Ektachrome B and Super Anscochrome Tungsten in daylight.	112347
UV	Absorbs only ultraviolet rays. Suited for mountain, snow, sea, and distant scenes. Also useful for outdoor color films.	112565	85C	For use with indoor films, Type F, such as Kodachrome F, and Ektachrome F in daylight.	112348

LENS CAP		
57mm for Canonet	112525	\$1.00
LOCKING CABLE RELEASE	sta, carrying case and flash unit.	
All-metal Cable Release for Steady Exposures.	Features built-in lock for long 112502	exposures. \$2.25
CAPACITOR, 100 MFD for J2 Flash Gun.	112514	\$2.00





Model 7 with F/0.95

• Parallax Corrected "Mark" Viewfinder

Bright frame system permits use of 35mm, 50mm, 85mm, 100mm and 135mm lenses with the same viewfinder. Fully parallax corrected for all these lenses at any distance.

• Universal Rangefinder

Convenient, accurate, double image rangefinder system sets precise focus for all Canon lenses at any distance—even at the maximum opening of the F/0.95 lens where depth of field is extremely shallow.

Extremely Sensitive Built-In Lightmeter Coupled to shutter speed dial gives accurate, direct reading exposure for any film speed from ASA 6-400 with complete flexibility for any lens opening—shutter speed combination. High-Low sensitivity adjustment extends range of meter.

• All Metal Focal Plane Shutter

Synchronized for all types of flash and flash bulbs. Equally calibrated speeds from 1 second to 1/000 seconds plus Bulb and Time and "X" (for electronic flash). The finest quality stainless shutter is impervious to heat, cold, moisture and troublesome pinholing.

• Complete "System" Photography

The Model 7 camera accepts a wide range of lenses from 25mm to 1000 mm in standard thread mounts, as well as the unique bayonet mounts of the 50mm f/0.95 and the compact reflex housings MB-2. General and special function accessories equip the Model 7 for any photographic situation.

FOUR TIMES BRIGHTER THAN THE HUMAN EYE Model 7 . . . F/0.95 lens

In so many ways there's something "extra-special" about owning a Bell & Howell/Canon 7 camera. Equipped with an f/0.95 lens, the world's fastest, "four times brighter than the human eye," the Model 7 will adapt quickly to the most complex photographic situation. With the Model 7 you not only own a camera but a complete "system" of photography...a system that will record a baby's smile or permit extra attention to the intricacy of macrophotography. An unmatched investment in camera value and satisfaction, the Model 7 offers a host of interchangeable lenses... from 25mm to 1000mm and accessories that will mean greater value and satisfaction to its owner. Painstakingly designed to meet any photographic requirement, the Bell & Howell/Canon 7 is a camera that you'll be proud to own ... proud to show ... proud to use!

MODEL 7.	
Model 7 Camera with 50mm F/1.8	\$289.95
Model 7 Camera with 50mm F/1.4 10CB	\$329.95
Model 7 Camera with 50mm F/1.2	\$389.95
Model 7 Camera with 50mm F/0.95	\$499.95
Model 7 Camera with 35mm F/1.5	\$369.95
Model 7 Camera with 35mm F/2.0	\$329.95
Model 7 Camera Body Only 10C+	\$200.00

• Single Stroke Winding Lever

Rapid, "thumb-operated" winding lever, advances film, cocks shutter and advances "self-resetting" exposure counter...all in one smooth operation. Fast crank system film rewind.

Other Features

Built-in, 10 second delay, self-timer . . . double exposure prevention . . . exclusive, anti-film-curl roller . . . cordless, direct socket for flash and electro-flash synchronization . . . shutter button safety lock which prevents accidental exposure . . . twin-safety locked back cover.

- ORDERING INFORMATION -

- Models 10CA, 10CB, 10CC and 10CF are shipped in #112001 or #112002 case (please specify).
- Model 10CD is shipped in #112001 case.
- + Limited quantity available. Order subject to existing supply.
- The Model 7 camera may be ordered with any listed accessory lens. It will be billed at the difference in the cost of the lenses.

CAMERA ACCESSORIES AND LIGHTING EQUIPMENT

CAMERA ACCESSORIES



DELUXE PRESENTATION CASE

Conservative satin etched, anodized aluminum trim is added to the rich black Presentation Case to set it apart in style and quality workmanship. Padded Bouclae corduroy cradles and protects your camera and accessories. Room for camera with wide angle or normal lens attached. Precisely fitted compartments for a Wide Angle and a Telephoto Lens. Sectioned for accessory flash gun incase, several rolls of film, filters, and self storing lens hood. For Model 7.

040375

\$39.95



EVEREADY CARRYING CASE

Smart Compact Carrying Case readies your camera for instant shooting. Made of durable top grain cowhide, the case is tanned to a rich, lustrous finish that sets it apart in styling and appearance. Locking screw holds camera firmly in place. With carrying strap.

For Model 7 with any normal or wide angle lens except 50mm F/0.95.

112002

\$17.95



EVEREADY CARRYING CASE

Top grain cowhide, selected for its durability and smart, rich appearance. One snap and your camera is ready for shooting. Camera is held firmly in place by a base-mounted locking screw. With carrying strap.

For Model 7 Camera with F/0.95

112001

\$21.95



CAMERA HOLDER L

Cradles the camera firmly in a perfect horizontal or vertical plane. Bubble level for accurate positioning. Recommended when using self-timer, telephoto lenses or taking portrait pictures.

112501

\$15.95

ACCESSORY COUPLER

When using a clip-on type speedlight on the Model 7, the Accessory Coupler should be used. The Accessory Coupler, which has an accessory clip, is also used to couple the view-finder when using 25mm lenses or other accessories with a shoe.

112505

\$9.95

LENS OPENING COVER

Included with lens and camera. Also available separately.

112506

\$1.00

NECK STRAP

Included with leather case. Also available separately.

112507

\$1.95

FILM MAGAZINE V

For owners who wish to load their own cassettes from bulk film stock. Holds up to 36 exposures (five feet) of film. Nickel in black finish, scratch-proof slots. In plastic case.

112503

\$4.95

LOCKING CABLE RELEASE

All-metal braided cable release for "rock-steady" exposures. Features built-in lock for long exposures.

112502

\$2.25

LIGHTING EQUIPMENT AND ACCESSORIES




FLASH UNIT V2

22.5V Battery—Capacitor Flash Gun. Fits directly on the camera's bayonet-type flash outlet. Full swivel head for bounce light use. Incorporates AG-1 Adapter. Built-in test lamp, bulb ejector, 5" folding reflector, flash calculator scale. For #5, #6 and AG-1 bulbs. With Capacitor. In Leather Case.

112512

\$18.95



SIDE-LIGHTING UNIT V

Battery-Capacitor-type auxiliary flash unit. Powered by main unit battery. 5" folding reflector. With capacitor and extension cord Va.

112511

\$21.50

Without Extension Cord Va.

112877

\$17.00

EXTENSION CORD Va (15')

112515

\$4.95

CAPACITOR 100MFD
For Flash Unit V-2 and Side Lighting Unit V.
112514

\$2.00

EXTENSION CORD Vb (3')

112513

\$3.75

AG-1 ADAPTER

For use in earlier Flash Unit V with AG-1 flash bulbs. Single plug in adapter.

112588

\$1.25

Canon lenses are held in the highest esteem by professional and discerning amateur photographers the world over for their unsurpassed excellence, unique optical design and precision engineering. Each lens produces the highest resolution, contrast, brilliance, and color fidelity. They are SpectraCoatedTM internally and externally to insure maximum color and tone balance, greater light transmission, and complete elimination of flare. Superb optical performance, coupled with reduction in weight and design refinement, has made these lenses famed throughout the world.

WIDE ANGLE LENSES... permit the coverage of expansive scenery, close-ups, groups and situations where there is little freedom for camera movement. The shorter focal length permits a greater depth of field resulting in increased picture realism.



25mm F/3.5



28mm F/2.8



35mm F/1.5

25mm F/3.5	Lens, Built-in Lens Hood (Use 40mm Fi	Iter)
112003		\$185.00
25mm View	wfinder in Case.1	
112004		\$18.95
Leather Ca	ase for 25mm Lens.	
112005		\$5.95
Accessory	Coupler.	
112505		\$9.95

28mm F/2.8 Lens, Built-in Lens Hood (Use 40mm Filter)
112006	\$170.00
28mm Viewfinder in Case.1	
112007	\$9.95
Leather Case for 28mm Lens.	
112008	\$4.95
Accessory Coupler.	
112505	\$9.95

35mm* F/2.8 Lens, Built-in Lens Hood (Use 40mm Filter)	All
112881	\$115.00

35mm F/2.0 Lens, Built-in Lens Hood (Use 40mm Filter)	
112009	\$150.00

35mm F/1.8 Lens, Built-in Lens Hood (Use 40mm Filter)	
112010	\$160.00

112011	\$190.00
Lasthar Coss for 25mm E/1 9 E/2 0 or E/2 9 Long	P A P B

Toutillet Gade for Committee,	110, 1, 210 01 1, 210 2011	
112012	#84053E	\$5.95

Leather Case for 35mm F/1.5 Lens.

VIOSII WAY

35mm F/1.5 Lens, Built-in Lens Hood (Use 40mm Filter)

Note ¹To use the 25mm or 28mm Viewfinder on the Model 7 the Accessory Coupler must be used. *Limited Supply

112013

\$5.95

NORMAL FOCUS LENSES... Multi purpose 50mm lenses are ideal for general photography such as portraiture and scenic pictures, as well as for close-ups and copying.



50mm F/0.95



50mm F/1.2



50mm F/1.4

50mm F/0.95 Lens (Use 72mm Filter)

This is the world's fastest lens . . . 2.2 times as fast as F/1.4. Ideally corrected for aberration, it produces corner to corner sharpness. Revolutionary lens coating assures true, natural color.

112031	\$320.00
50mm F/1.2 Lens (Use 55mm Filter) 112030	\$210.00
50mm F/1.4 Lens (Use 48mm Filter) 112029	\$150.00
50mm F/1.8 Lens (Use 40mm Filter) 112028	\$110.00
Leather Case for 50mm F/1.8 and F/1.4 Lens. 112032	\$5.95
Leather Case for 50mm F/1.2 Lens. 112033	\$5.95
Leather Case for 50mm F/0.95. 112034	\$9.95

LONG FOCUS LENS... Produces the natural perspective that is so perfect for portraiture. Highly suited as well for news pictures, sports events, commercial photography and for stage show pictures.



85mm F/1.8

85mm F/1.8 Lens (Use 58mm Filter) 112035

Leather Case for 85mm F/1.8 Lens.

\$170.00

\$6.95

TELEPHOTO LENSES... Ideally suited for vivid shots of distant scenes and hard to reach subjects. Perfect for sporting events. The natural perspective, even at short ranges make them suitable for general photography and portraiture.



100mm F/2.0

100mm F/3.5 Lens (Use 40mm Filter) 112014	\$100.00
100mm F/2.0 Lens (Use 58mm Filter) 112015	\$170.00
135mm F/3.5 Lens (Use 48mm Filter) 112018	\$130.00
Leather Case for 100mm F/3.5 Lens. 112016	\$6.95
Leather Case for 100mm F/2.0 Lens. 112017	\$6.95
Leather Case for 135mm F/3.5 Lens. 112019	\$6.95

TELEPHOTO AND LONG TELEPHOTO M LENSES... Include the M 135mm F/2.5 and M200mm F/3.5.

These telephoto and long telephoto pre-set type lenses are designed to be used exclusively in combination with the new extremely compact Reflex Housing MB-2 on the Model 7 camera. They both have Canonflex-type bayonet mounts, aperture click stops down to f/22, and magenta coating.



* M 135mm F/2.5 Set for Model 7 (Use 58mm Filter)

112020

\$190.00

M135 Lens Set consists of following items. Available separately upon request.

M 135mm F/2.5 lens 112021

Lens Hood T-60

112520 112024

Leather Carrying Case

M135mm F/2.5

★ M 200mm F/3.5 Set for Model 7 (Use 58mm Filter)

112026

M 200 Lens Set consists of the following items. Available separately upon request.

M 200mm F/3.5 Lens

Lens Hood T-60

112520

112026

Leather Carrying Case

112027


Reflex Housing MB-2 (Mirror Box 2)

Compact Reflex Housing for use with Model 7 and both M-Series lenses.

112022

\$115.00

*A complete set should also include the MB-2 Reflex Housing which is interchangeable between both sets.

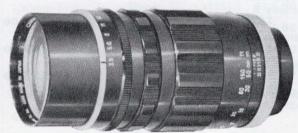

M200mm F/3.5

LONG TELEPHOTO LENSES... Extremely powerful in magnification and dramatic in telephoto effect. Best suited for photographing close-ups of wildlife and the vivid details of distant small subjects. Features the new compact Reflex Housing MB-2 with ground glass focusing.

†400mm F/4.5 Set for Model 7 (Use 48mm Filter)

112040

\$471.00



400m F/4.5

400mm Lens Set consists of the following items. Available separately upon request.

400mm F/4.5 Model 2 Lens With Lens Hood. 112041

Intermediate Tube

112043


Carrying Case

112045

†600mm F/5.6 Set for Model 7 (Use 48mm Filter)

112060

\$550.00



600mm Lens Set consists of the following items. Available separately upon request.

600mm F/5.6 Lens with Lens Hood.

112061

Intermediate Tube 112062

Carrying Case

112063

600mm F/5.6

[†]A complete set for the long telephoto lenses should include the Reflex Housing MB-2, Lens Supporter and Bellows R which are all interchangeable among sets.

†800mm F/8 Set for Model 7 (Use 48mm Filter) 112080

\$650.00



800mm Lens Set consists of the following items. Available separately upon request.

800mm F/8 Model 2 Lens with Lens Hood. 112021 Intermediate Tube 112062 Carrying Case 112082

†1000mm F/11 Set for Model 7 (Use 48mm Filter) 112090

\$750.00

1000mm Lens Set consists of the following items. Available separately upon request.

1000mm F/11 Lens with Lens Hood. 112091

Intermediate Tube 112092 Carrying Case 112093

Accessories for use with Long and Extra-Long Telephoto Lenses

Bellows R 112044

\$50.00

Lens Supporter 112042

\$49.00

Reflex Housing MB-2 112022

\$115.00

 \dagger A complete set for the long telephoto lenses should include the Reflex Housing MB-2, Lens Supporter and Bellows R which are all interchangeable among sets.

CANON LENS SPECIFICATIONS

Туре	Angle of View	Magni- fication	No. of Elements	Net V	Veight	Barrel	Att'ment Size	Aperture (f stops) Click Stops		g Range	Coating
I BOILE OF THE ME	view			(oz.)	(gr.)	STATE OF THE PARTY	Series	down to	in feet	in meters	
Wide-Angle											
25mm F3.5	82°	0.5×	5	5	145	Brass	40mm VII	22	3.5~50	1~20	Purple
28mm F2.8	75°	0.56×	6	5.6	160	Brass	40mm VII	22	3.5~50	1~20	Magenta
35mm F1.5	64°	$0.7 \times$	8	6.5	185	Light Alloy	48mm VII	22	3.5~50	1~20	Amber
35mm F1.8	64°	$0.7 \times$	7	4.4	125	Light Alloy	40mm VII	22	3.5~50	1~20	Amber
35mm F2.8	64°	0.7×	5	4.4	125	Light Alloy	40mm VII	22	3.5~50	1~20	Purple
Normal-Focus	4-1-1	Talleon .	alesti on o	of the land	lo atsiano	o to2 ano.l o	m000				The same
*50mm F0.95	46°	1.0×	7	_	_	·		16	3.5~5000	1~2000	
50mm F1.2	46°	1.0×	7	11.4	322	Light Alloy	55mm	22	3.5~50	1~20	Amber
50mm F1.4	46°	1.0×	6	8.6	246	Light Alloy		22	3.5~50	1~20	Amber
50mm F1.8	46°	1.0×	6	9.5	270	Light Alloy	40mm VI	22	3.5~50	1~20	Amber
Long-Focus			THE STATE OF								
85mm F1.8	29°	$1.7 \times$	5	24	680	Light Alloy	58mm	22	3.5~60	1~20	Magenta
Telephoto											
100mm F2	24°	2.0×	6	18.3	515	Light Alloy	58mm	22	3.5~100	1~30	Amber
100mm F3.5	24°	2.0×	5	7.7	220	Light Alloy	40mm VII	22	3.5~100	1~30	Purple
135mm F3.5	18°	2.7×	4	15.5	438	Light Alloy	48mm VII	22	5~200	1.5~60	Magenta
**M135mm F2.5	18°	2.7×	6	_		_		22	5~10000	1.5~3000	
Long-Telephoto											
**M200mm F3.5	12°	$4.0 \times$	7	13K _2/1	<u>manu</u>	_		22	8~15000	2.5~5000	
200mm F3.5	12°	4.0×	7	32	850	Light Alloy	58mm	22	10~300	3~100	Purple
Extra-Long-			nnw soci	4.7.4	mmdos		1				
Telephoto			BOSEZU	0.011	0.1					0 000	
400mm F4.5	6°	8.0×	5	8.8 lbs.	3 kg	Light Alloy	Special	22	26~1000	8~200	Magenta
600mm F5.6	3.3°	12.0×	2	4.0 lbs.	1.8 kg	Light Alloy	Special	32	17~00	5~00	Purple
800mm F8	2.5°	16.0×	2	4.2 lbs.	1.9 kg	Light Alloy	Special	32	30~00	9~00	Purple
1000mm F11	2°	20.0×	2	4.0 lbs.	1.8 kg	Light Alloy	Special	32	90~00	27~00	Purple

^{*} Special bayonet-mount M-type lens used for the Model 7 only.

^{**} Bayonet-mount-type lens used in combination with Mirror Box 2.

LENS ACCESSORIES

LENS	Filter Size	Lens	Hood	Len	s Ca	p¹	Dus	t Ca	p¹	Auto-Ups ² with Case
25mm F/3.5	40mm	Bui	ilt-in	112523	\$.75	112528	\$	1.20	Didd In the
28mm F/2.8	40mm	Bu	ilt-in	112523	\$.75	112529	\$	1.20	_
35mm F/1.5	48mm	Bu	ilt-in	112524	\$.75	112530	\$.75	social - Los
35mm F/1.8	40mm	Bu	ilt-in	112523	\$.75	112530	\$.75	
35mm F/2.8	40mm	Bu	ilt-in	112523	\$.75	112530	\$.75	77 _70
50mm F/0.95	72mm	112522	\$ 9.95	112527	\$	2.50	112532	\$	1.95	_
50mm F/1.2	55mm	112521	\$ 7.95	112525	\$	1.00	112530	\$.75	57mm
50mm F/1.4	48mm	112517	\$ 6.50	112524	\$.75	112530	\$.75	50mm
50mm F/1.8	40mm	112516	\$ 5.95	112523	\$.75	112530	\$.75	42mm
85mm F/1.8	58mm	112520	\$13.50	112526	\$	1.00	112530	\$.75	Pest during
100mm F/2	58mm	112520	\$13.50	112526	\$	1.00	112530	\$.75	alps with
100mm F/3.5	40mm	112519	\$ 4.95	112523	\$.75	112530	\$.75	
135mm F/3.5	48mm	112518	\$ 4.50	112524	\$.75	112530	\$.75	1 feet tours to
M-135mm F/2.5	58mm	112520	\$13.50	112526	\$	1.00	112531	\$	1.95	demiciralization
M-200mm F/3.5	58mm	112520	\$13.50	112526	\$	1.00	112531	\$	1.95	
400mm F/4.5	48mm	Bu	ilt-in	100)mn	1 ³	Specia	al C	rder	
600mm F/5.6	48mm	Bu	ilt-in	118	3mn	n^3	Speci	al C	rder	
800mm F/8	48mm	Bu	ilt-in	112	mn	n^3	Specia	al C	rder	Qua - 19
1000mm F/11	48mm	Bu	ilt-in	100	mn	n^3	Speci	al C	rder	_

Notes: 1Supplied with lens. Also available separately.

AUTO-UPS . . . Supplementary close-up lenses. Permit accurate focusing through the camera rangefinder. Use Parrallax Compensater III with 50mm accessory. Viewfinders for accurate composition. When using the camera body viewfinder the parrallax compensation is not necessary.

Auto-Up No. 1 Auto-Up No. 2

For

Max. & Min.

Canon 50mm Lens

Auto-Ups for Model 7

		Shooting Distance	Range of Object
F F 0	Auto-Up 450	FF 100	21 21 52 12
For 50mm lenses	No. 1 Auto-Up 900	55~100 cm	31x21~63x42 cm
	No. 2	39~52 cm	21x14~31x21 cm

N. BE	ESIT BESTI	Shooting Distance	Range of Object	distance between	3' 2 ³ / ₄ "~1' 9 ⁷ / ₈ " 984mm~539mm	1′ 85/8″~1′ 31/8″ 523mm~378mm
	Auto-Up 450			film & object		
mm	No. 1 Auto-Up 900	55~100 cm	31x21~63x42 cm		2' 7/8"x1' 41/2"~	1′ 3/8″x81/4″~
	No. 2	39~52 cm	21x14~31x21 cm	Area covered at above distance	1′ 5/8″x8′x1/2″ 730mmx420mm~	8½"x5½" 315mmx210mm~
				mhi mine se applicate Mi ya polosopa nolo	310mmx207mm	204mmx136mn
				moorestis.	AUTO-UP 900 (No	. 2)

		AUTO-UP 300 (No. 2)	
AUTO-UP 450 (No. 1)		42mm with case	
42mm with case		112070	\$24.75
112071	\$24.75	50mm with case 112072	\$34.75
50mm with case		57mm with case	
112073	\$34.75	112074	\$37.50
57mm with case		Parallax Compensator III	
112075	\$37.50	112089	\$ 9.95

Canon 50mm Lens

²In Leather Case.

Special Order.

VERSATILE SCREW-IN FILTERS...

... are made of specially selected optical glass, polished flat and coated hard on both surfaces, are free from strain and unaffected by light or moisture. All filters are made under rigid quality control to insure the maximum performance of the Canon lenses. With case.

Туре	Exposure Factor	Uses and Effects FOR BLACK AND WHITE FILM	40mm \$5.50	48mm \$6.95	55mm \$9.25	58mm \$12.50	72mm \$18.95
UV	1X	Absorbs only ultraviolet ray, suited for mountain, snow, sea, and distant scenes. Also useful for outdoor color film.	112545	112555	112565	112575	112585
Y1	1.5X	Absorbs ultraviolet and some blueviolet rays, suited for general photography; renders red and yellow subjects lighter than the eye sees them; darkens the sky to bring out clouds, and emphasizes contrast in sea scenes.	112540	112550	112560	112570	N/A
Y3	2X	Has the same effects as the Y1, but emphasizes it.	112541	112551	112561	112571	112581
G1	3X	Passes green light most freely; darkens yellow, blue, orange, and red subjects.	112543	112553	112563	112573	N/A
01	ЗХ	Absorbs ultraviolet, blue, and some green lights. Renders blue subjects considerably darkeryellow and red subjects lighterthan the eye sees them. Most effective for distant landscape.	112542	112552	112562	112572	N/A
R1	6X	For panchromatic and infra-red films. Turns blue subjects darker, and red and green subjects lighter. Gives moonlight effect on daylight landscape scenes.	112544	112554	112564	112574	112584
		FOR COLOR FILM		Man celA	Series Park	W Perloqui Patresi r	al albeini
1A Skylight	cia monthia begingant	For all daylight color film. For distant snow or mountain scenes on overcast days and for open shade under a clear sky to reduce excessive blue.	112319	112334	112349	112364	112416
80C	U-orus	Use with daylight Kodachrome, Anscochrome and Ektachrome for flash bulb (except SM & SF) photography. Also gives cooler colors for early morning and late afternoon pictures and where fill in flash is used.	112323	112338	112353	112368	112418
80B	Pre-pre-	Use with the same daylight color films as above indoors with photofloods.	112320	112335	112350	112365	N/A
81A		Use with the same daylight type color films as above indoors with electronic flash.	112321	112336	112351	112366	112419
82A	Kinna-Ba- nai Città mm 1-2 S (3	Use with the same daylight type color films as above and with Kodacolor, Ektacolor, Agfacolor CN 14 and CN 17 in early morning and late afternoon.	112322	112337	112352	112367	112420
85B	mar PAS mar PAS mar PAS mar PA	For use with indoor films (Type B) such as Ektachrome B, High Speed Ektachrome B, and Super Anscochrome Tungsten in daylight.	112317	112332	112347	112362	112417
85C	busies.	Use with indoor films (Type F), Kodachrome F and Ektachrome F in daylight.	112318	112333	112348	112363	N/A

REPRODUCING APPARATUS AND ACCESSORIES

Because 35mm film is inexpensive and can be easily handled and stored, its use in copying has increased greatly. The Canon Copying Apparatus is designed to adapt the Bell & Howell/Canon Lens and Camera, whose reputation as top-class precision instruments have been established the world over, to close-up work, so that 35mm film may be used in copy work easily, rapidly and accurately.


Copy Stand 3 for 50mm F/1.8 lens. Complete set with supplementary lenses.

112533

\$160.00

Copy Stand 3 for 50mm F/1.4 lens. Complete set with supplementary lenses.

\$165.00

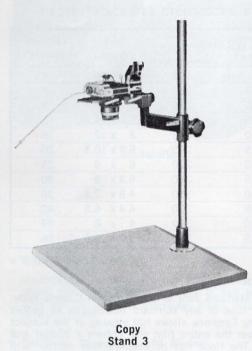

Note—Each Complete Set consists of the following:

STANCHION:

Upright post attached to base board on which copying

apparatus is mounted.

CARRYING ARM:

Sliding arm, mounts camera to Stanchion. Can be mounted in either upward or downward position de-

pending upon magnification desired.

PANTA CLOSE FOCUSING SLIDE: Key part of entire apparatus. Permits

interchanging of ground glass and camera lens for precise focusing. Can also be used on tripod.

FOCUSING MOUNT: Used between the lens and camera mount for focusing.

SUPPLEMENTARY LENS (NO. 1 & 2): Attach to camera lens depending on

magnification desired.

METAL SCALE:

Used to determine distance of subject to film plane.

VINYL COVER:

Protects apparatus from dust when left in an assembled

position.

CASE:

For storage of apparatus when disassembled.

BASE BOARD:

Made specially flat for precise copy work.

EXTENSION RING (A, B, C): Used to expand the object area when the focusing mount is not sufficient. A = 6mm, B = 9mm,

C = 12mm. Used alone or together.

RIGHT ANGLE FOCUSING GLASS: Three power magnification. Placed on top of the focusing glass. Convenient when the focusing glass is at eye level.

Direct View Focusing Glass

Ten power magnification focusing glass. Extremely useful for precise focusing.

112535

\$12.50

Supplementary Lenses 48mm for 50mm F/1.4 Lens (Set of No. 1 and 2)

112537

\$19.95

(Set of No. 1 and 2)

112536

Supplementary Lenses 40mm for 50mm F/1.8 Lens

\$17.50

Focusing Mount for 50mm F/1.8 and F/1.4

112538

\$ 7.95

COPYING SPECIFICATIONS

Camera Body	All Bell & Howell/Canon Cameras (Except Canonet)
Lens	50mm F/1.8 or F/1.4
Film Size	24mm x 36mm
Ratio of Reduction	Without Supplementary Lens 1/1-1/7 With Supplementary Lens 1/7.5-1/22
Area Covered	528mm x 792mm-24mm x 36mm
Object to Film Distance	1330mm-206mm

MACROPHOTOGRAPHY ACCESSORIES

With Macrophoto extension tubes, the Copy Stand 3 can be use to photograph extremely small subjects. By using these tubes individually, or in combination, a sharp magnified image of approximately $1\frac{1}{2}$ to $6\frac{1}{2}$ times the size of the original subject can be recorded on film.

\$3.95

\$3.30



MACROPHICTO COURT FR	handward the world	MACROP	HOTO EXTENS	ION TUBES
MACROPHOTO COUPLER		25mm	112589	\$ 3.50
Used to couple lens to photo Extension Tubes.	Macro	50mm	112590	\$ 4.50
55mm (for 50mm F/1.2)		75mm 100mm	112591	\$ 5.95 \$ 7.50
112595	\$3.95	150mm	112592	\$ 9.95
48mm (for 50mm F/1.4)		200mm	112594	\$12.95

Pictured at left

TABLE FOR MACROPHOTO EXTENSION TUBES

Couplers and Extension Tubes



MACROPHOTO STRUT

112596

112597

40mm (for 50mm F/1.8)

For use with extension tube combinations in excess of 75mm. This is necessary to hold the lens in correct relationship with the subject with long extension tubes to prevent distortion and improper focus.

112598 \$5.95

Total Tube Length (mm)	Photography Magnification (approx.)	Object- Measuring Line Distance (mm, approx.)	Area (approx.)	Exposure Magnification
25	1	160	24 x 36	4
50	1.5	165	16 x 24	6
75	2.0	180	12 x 18	9
100	2.5	195	9.6 x 14.4	12
125	3.0	215	8 x 12	16
150	3.5	240	6.8 x 10.3	20
175	4.0	270	6 x 9	25
200	4.5	290	5.3 x 8	30
225	5.0	310	4.8 x 7.2	36
250	5.5	330	4.4 x 6.5	42
275	6.0	360	4 x 6	49
300	6.5	390	3.7 x 5.5	56



Photograph any microscopic image with the standard Bell & Howell/Canon Camera body. The Photomicrographic Unit couples to the tube of any standard microscope to permit recording the full subject. Five power Focusing Eyepiece allows full viewing of the subject during exposure. The image recorded will cover the entire film size (24mm x 36mm) and si $\frac{1}{2}$ X of the magnified microscope image. The Hood has between-the-lens shutter with speed of $\frac{1}{200}$, $\frac{1}{100}$, $\frac{1}{25}$, $\frac{1}{10}$, $\frac{1}{5}$, $\frac{1}{2}$, $\frac{1}{2}$ second, T and B and the X terminal. Reflex housing permits focusing and observation of microscope image during period of exposure.

Unit is supplied with Hood, Reflex Housing, Focusing Eyepiece, Coupler for Microscope's ocular tube (Couples to ocular tube with outside diameter from 24.7 to 25.2mm), Plastic dust Cap and Cable Release V.

112559

\$104.95

6 X 6 PHOTOMICROGRAPHIC CAMERA MODEL II

PHOTOMICROGRAPHIC UNIT, MODEL CM-IIA

For photographing the microscope image up to $2\frac{1}{4}$ " x $2\frac{1}{4}$ " on $3\frac{1}{4}$ " x $3\frac{1}{4}$ " cut film. This camera is used with the Photomicrographic Unit Model CM-IIA in place of the standard Bell & Howell/Canon Camera Body. The Model II Camera has a between-the-lens shutter with speeds of 1/200, 1/100,

112579

\$67.00

FOCUSING SCREEN

For focusing and observation with either the Photomicrographic Unit Model CM-IIA or Photomicrographic Camera Model II. 2" screen diameter.

112582

\$7.95

PHOTOMICRO-PROJECTOR

A conical tube with ground-glass screen. Designed for group observation of specimens seen through a microscope. Mounts on microscope ocular tube by means of Coupler. Microscope is projected on ground-glass screen of 33/4" in diameter. Elevation Screw adjusts the angle of built-in mirror and positions image on the screen. By removing conical tube

from Mirror Housing, the microscope image may be projected on a projection screen.

112583

\$35.00

PHOTOMICROGRAPHIC UNIT HOLDER

For stabilizing the position of the photomicrographic attachment when it is used on the Copying Stand because of the microscope's mechanical construction.

112569


\$6.50

PHOTOMICROGRAPHIC HOOD

112549

\$7.50

Bell & Howell Canon





Model RM

• Single Lens Reflex

An improved compact eye-level reflex system that shows the exact picture coverage in full brightness without inverting the image either vertically or horizontally.

Built-In, Coupled Light Meter

A highly sensitive light meter with film speeds from ASA 10 to 800 is coupled to the shutter speed dial to give accurate direct reading aperture settings for any shutter speed-aperture combination.

• Single Pivot Focal Balance Shutter

Single dial sets equally calibrated scales from 1 to 1/1000 sec. or B. Fully synchronized at various speeds for any type of flash bulb and electronic flash.

Super-Canomatic System

Bright viewfinder image at all times. Built into the optical system, the Super-Canomatic System allows you to pre-set the diaphragm to any aperture setting without dimming the viewfinder. When the shutter button is pressed, the diaphragm and mirror are actuated and return to original position all in a fraction of a second.

Precision . . . Performance . . .

Never before . . . has a 35mm Camera been made to such precise, such exacting standards of manufacture and performance as the new Canonflex RM of Bell & Howell/Canon. A Single-Lens-Reflex Camera that combines the advantages, the compactness, the accuracy of a rangefinder camera while incorporating all the flexibility . . . all the versatility of a Single-Lens-Reflex. The Bell & Howell/Canon Canonflex RM incorporates all the precision features that have made the name pre-eminent in the world of photography. The new RM excells in optical as well as mechanical perfection . . . making it the ultimate in the high quality, high performance, Single-Lens-Reflex Cameras.

With the Model RM you have at your disposal an entire "System" of Photography. A system recognized the world over for it's precision, it's flexibility and it's performance.

The Super Canomatic System is also yours as an integral part of the Model RM. Truly outstanding, the Super Canomatic System lets you view and focus with full brightness at all times.

In design . . . in manufacture . . . in performance . . . the Canonflex RM by Bell & Howell/Canon is truly the most outstanding 35mm camera today.

CANONFLEX RM

Model RM Reflex Camera with $50mm\ f/1.8$ Super Canomatic Lens.

20CA

\$299.95

Model RM Reflex Camera with 58mm f/1.2 Super Canomatic Lens.

2000

\$425.00

Model RM Reflex Camera with 35mm f/2.5 Super Canomatic Lens.

20CE

\$345.00

Model RM Reflex Camera—Body Only.

20C

\$185.00

• Built-In Range Viewfinder

Split image rangefinder for precise needle-sharp focusing. Ground glass viewing also shows you the exact sharpness and depth of field when the manual diaphragm is stopped down to the desired setting.

Other Convenient Quality Features

Single stroke winding lever . . . rapid crank rewind . . . double exposure prevention . . . self resetting exposure counter . . . complete "system" photography.

- ORDERING INFORMATION -

- Model 20CA and 20CE are shipped in 112603 or 112604 case. Please specify.
- Model 20CC is shipped in 112604 case.
- + Limited quantity available. Order subject to existing supply.
- The Model RM Reflex Camera may be ordered with any listed accessory lens. It will be billed at the difference in the cost of the lens.

CAMERA ACCESSORIES AND LIGHTING EQUIPMENT



CAMERA ACCESSORIES

DELUXE PRESENTATION CASE

Conservative satin-etched, anodized aluminum trim is added to the rich black Presentation Case to set it apart in style and quality workmanship. The padded exterior and rich, padded Boucle Corduroy interior cradles your equipment against accidental bumps. Room for Camera with wide angle or normal lens attached. Precisely fitted compartments for accessory wide angle and telephoto lenses. Sectioned for accessory flash gun in case, several rolls of film, filters and self storing lens hoods. For Canonflex RM.

040376

\$39.95

EVERREADY CARRYING CASE

Beautiful tanned leather eveready carrying case for the Canonflex RM. Readies your camera for instant shooting. One snap and you're ready to take pictures. Locking screw holds the camera firmly in place. With neck strap.

For RM with 58mm f/1.2 Lens

112604

\$17.95

For RM with all other normal and wide angle lenses

112603

\$16.95

WAIST LEVEL VIEWER

Attaches to the Canonflex RM. Convenient, 360° rotation with 90° internal check stop for low angle photography copy work, etc. and essential for precision close-up photography with Bellows R.

112629

\$21.95

CAMERA HOLDER R-3

Cradles the camera firmly in a perfect horizontal or vertical plane. Convenient for using telephoto lenses on a tripod and essential for use with the copy stand. In leather case.

112626

\$14.95

LOCKING CABLE RELEASE

All-metal, cable release for steady exposures. Features built-in lock for long exposures.

112502

\$2.25

FILM MAGAZINE V

For owners who wish to load their own cassettes from bulk film. Holds up to 36 exposures (five feet) of film. Nickel in black finish, scratch-proof slots. In plastic case.

112503

\$4.95

NECK STRAP

Sheep-skin neck strap. Included with camera or Leather Case, also available separately.

112607

\$1.50

LENS OPENING COVER R

112663

\$.50

LENS MOUNT CONVERTER E

Permits use of an Exacta mount Lens on Canonflex.

112125

\$7.95

LENS MOUNT CONVERTER A

Permit use of Canon and Leica type screw mount lenses with Canonflex.

112135

\$11.50

LENS MOUNT CONVERTER B

Permit use of Canonflex lenses with screw mount Canon cameras or close-up screw mount accessories.

112693

\$6.50

FLASH UNITS AND ACCESSORIES

FLASH UNIT MODEL V2

22.5V Battery Capacitor Flash Gun. Full swivel head for bounce light use. Built-in test lamp, bulb ejector, 5" folding reflector and flash calculator scale. Incorporates AG-1 Adaptor. For #5, 6, and AG-1 bulbs. With 100 uf capacitor. In Leather Case.

112512

\$18.95

SIDE-LIGHTING UNIT V

Battery Capacitor type auxiliary flash unit. Powered by main unit battery. 5" folding reflector. With capacitor and extension cord Va.

112511

\$21.50

WITHOUT EXTENSION CORD VA

112877

\$17.00

EXTENSION CORD VA (15')

112515

\$4.95

EXTENSION CORD VB (3')

112513

\$3.75

CAPACITOR 100MFD

For Flash Unit V2 and Side Lighting Unit V.

112514

\$2.00

FLASH UNIT COUPLER

Accessory shoe for using clip-on type speedlights on Canonflex RM.

112634

\$8.95

Page 12 (Model 7/Canonflex)

Canon lenses are held in the highest esteem by professional and discerning amateur photographers the world over for their unsurpassed excellence, unique optical design and precision engineering. Each lens produces the highest resolution, contrast, brillance, and color fidelity. They are SpectraCoatedTM both internally and externally to insure maximum color and tone balance, greater light transmission, and complete elimination of flare. Superb optical performance, coupled with reduction in weight and design refinement has made these lenses famed throughout the world.

WIDE ANGLE LENSES

... permit the coverage of expansive scenery, close-ups, groups and situations where there is little freedom for camera movement. The shorter focal length permits a greater depth of field resulting in increased picture realism.

NORMAL FOCUS LENSES

... are multi purpose lenses ideal for general photography such as portraiture and scenic pictures, as well as for closeups and copying.

TELEPHOTO LENSES

...ideally suited for vivid shots of distant scenes and hard to reach subjects. Perfect for sporting events. The natural perspective, even at short ranges make them suitable for general photography.

LONG TELEPHOTO LENSES

... exemplify Canon's finest work in lens design. These lenses are widely used in astronomy, police work and in press photography to provide wide varieties of perspective. Each lens is sold with a complete set of accessories.

SUPER CANOMATIC LENSES

Super Canomatic lenses have a fully automatic spring back diaphragm. As the shutter is released, the diaphragm closes down to a pre-selected aperture stop and springs back to full aperture viewing automatically after exposure. Two rings; one sets the pre-selected aperture for automatic operation, the other visual ring sets independently to obtain depth of field.



35mm F/2.5R



50mm F/1.8R

WIDE ANGLE LENSES	
35mm F/2.5R Super-Canomatic Lens with case. (Use 58mm Filter)	
112103	\$164.95
Leather Case for 35mm F/2.5R.	
112104	\$ 4.95
NORMAL FOCUS LENS	
58mm F1.2R Super-Canomatic Lens with case. (Use 58mm Filter)	
112107	\$245.95
Leather Case for 58mm F/1.2R.	
112108	\$ 5.95
50mm F/1.8R Super-Canomatic Lens with case. (Use 58mm Filter)	
112105	\$134.95
Leather Case for 50mm F/1.8R.	
112106	\$ 4.95
TELEPHOTO LENSES	
85mm F/1.8R Super-Canomatic Lens with case. (Use 58mm Filter)	
112109	\$190.00
Leather Case for 85mm F/1.8R.	
112110	\$ 6.95

100mm F/2.0R Super-Canomatic Lens with case. (Use 58mm Filter)

135mm F/2.5R Super-Canomatic Lens with case. (Use 58mm Filter)

112111

Leather Case for 100mm F/2.0R.


112112

112113Leather Case for 135mm F/2.5R.

112114

CANOMATIC LENS

The Canomatic lens has an automatic mechanism which works the same as the Super-Canomatic except that the diaphragm does not return to full aperture again unless the charge ring is manually returned to full aperture. By pressing the pre-set release button by the lens mount ring, the depth of field can be viewed.





200mm F/3.5R

\$200.00


\$200.00

6.95

6.95

CANON LENS R (Pre-Set)

Two rings; one is the pre-set ring, the other is the F stop setting ring which enables the photographer to quickly set the aperture after focusing at full brightness.

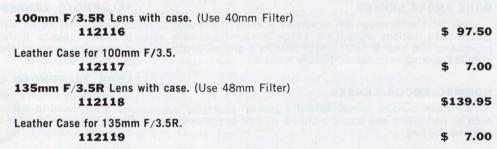



R 135mm f/3.5

CANON LENS R (Manual F Stop Control)

These lenses have a single diaphragm setting ring without automatic operation.

LONG TELEPHOTO LENSES



R 300mm f/4.0

†300mm F/4.0R Lens Set. (Use 48mm Filter) 112130

\$321.00

300mm F/4.0R Lens Set consists of the following items. Available separately upon request.

300mm F/4.0R Lens with Lens Hood. 112131

Intermediate Tube 112043 Leather Carrying Case 112132



R 400mm f/4.5


†400mm F/4.5R Lens Set. (Use 48mm Filter) 112140

\$471.00

400mm F/4.5R Lens Set consists of the following items. Available separately upon request.

400mm F/4.5R Lens with Lens Hood. 112041

Intermediate Tube
112043
Leather Carrying Case
112142



\$550.00

600mm F/5.6R Lens Set consists of the following items. Available separately upon request.



R 600mm f/5.6

600mm F/5.6R Lens with Lens Hood. 112061

Intermediate Tube 112062 Metal Carrying Case 112163

[†]A complete set for the long telephoto lenses should consist of the Bellows R and Lens Supporter which are interchangeable among sets.



†800mm F/8R Lens Set (Use 48mm Filter) 112180 \$650.00

800mm F/8R Lens Set consists of the following items. Available separately upon request.

800mm F/8R Lens with Lens Hood. 112081

Intermediate Tube 112062 Metal Carrying Case 112182

†1000mm F/11R Lens Set (Use 48mm Filter) 112190 \$750.00

1000mm F/11R Lens Set consists of the following items. Available separately upon request.

1000mm F/11R Lens with Lens Hood. 112091

Intermediate Tube 112092 Metal Carrying Case 112193

Accessories for use with Long and Extra-Long Telephoto Lenses.

Bellows R 112044 Lens Supporter

\$ 50.00

112042 \$ 49.00

† A complete set for the long telephoto lenses should consist of the Bellows R and Lens Supporter which are interchangeable among sets.

SPECIFICATIONS FOR CANONFLEX LENSES

Medical netalli	Angle	Magni-	Num- ber of	Net We	eight	Aperture (F Stops)	Attach- ment	Focusing	Range	Coating	
Туре	of View	fication	Ele- ments	(oz.)	(gm.)	Click Stops down to	Size Series	in Feet	in Meters	Coating	
Wide-Angle Super Canomatic Lens			ell p l			For distan	milit sul	at daying to		Tringity N.S.	
R 35mm F2.5	64°	0.7X	7	9	322	16	58 mm	1.5~10~00	0.4~ 5~00	Magenta	
Normal-Focus Super Canomatic Lens							ML 50188		VAS		
R 85mm F1.8	46°	1.0X	6	11	305	16	58 mm	2 ~50~00	0.6~15~00	Amber	
Long-Focus Super Canomatic Lens			Also agos	ingraphy are after	lorig (3	pl SW & S	opendies	d desir not environ- documento o la	min west the last	ultra T	
R 85mm F1.8	29°	1.7X	5	1.0 lbs.	470	16	58 mm	3.5~60~00	1 ~20~00	Magenta	
Telephoto Super Canomatic Lens			ristor	210000113	post a	emi i me	dayiyab	one on the	is mounted set!	BOS	
R 100mm F2	24°	2.0X	6	1.1 lbs.	515	16	58 mm	3.5~60~00	1 ~20~00	Amber	
& R 135mm F2.5	18°	2.7X	6	1.4 lbs.	630	16	58 mm	5~100~00	1.5~30~00	Magenta	
Canon Lens R (Pre Set)											
100mm F3.5	24°	2.0X	5	6.5	184	22	40 mm	3.5~100~00	1.5~30~00	Purple	
135mm F3.5	18°	2.7X	4	15	438	22	48 mm	5~100~00	1.5~30~00	Magenta	
Long-Telephoto Canomatic Lens			na brie	irods as	emin	State of P	Legity's	once out this	notification of the second	ASB	
R 200mm F3.5	12°	4.0X	7	1.5 lbs.	670	22	58 mm	8~150~00	2.5~50~00	Magenta	
Extra-Long-Telephoto											
R 300mm F4	8°	6.0X	5	2.6 lbs.	1180	22	Special	No Distar	ice Scale	Magenta	
R 400mm F4.5	6°	8.0X	5	3.3 lbs.	1500	22	Special	No Distar	ice Scale	Magenta	
R 600mm F5.6	4°	12.0X	2	4 lbs.	1830	32	Special	No Distan	ice Scale	Purple	
R 800mm F8	3°	16.0X	2	4.2 lbs.	1920	32	Special	No Distar	ice Scale	Purple	
R1000mm F11	2.4°	20.0X	2	4 lbs.	1830	32	Special	No Distar	as Casla	Purple	

Note: The weight of lenses over 200 mm is of net weight (lens alone) and does not include lens supporter, intermediate tube, and bellows R.

VERSATILE SCREW-IN FILTERS...

... are made of specially selected optical glass, polished flat and coated hard on both surfaces, are free from strain and unaffected by light or moisture. All filters are made under rigid quality control to insure the maximum performance of the Canon lenses. With case.

Туре	Exposure Factor	Uses and Effects FOR BLACK AND WHITE FILM	40mm \$5.50	48mm \$6.95	58mm \$12.50
UV	1X	Absorbs only ultraviolet ray, suited for mountain, snow, sea, and distant scenes. Also useful for outdoor color film.	112545	112555	112575
Y1	1.5X	Absorbs ultraviolet and some blueviolet rays, suited for general photography; renders red and yellow subjects lighter than the eye sees them; darkens the sky to bring out clouds, and emphasizes contrast in sea scenes.	112540	112550	112570
Y3	2X	Has the same effects as the Y1, but emphasizes it.	112541	112551	112571
G1	ЗХ	Passes green light most freely; darkens yellow, blue, orange, and red subjects.	112543	112553	112573
01	ЗХ	Absorbs ultraviolet, blue, and some green lights. Renders blue subjects considerably darkeryellow and red subjects lighterthan the eye sees them. Most effective for distant landscape.	112542	112552	112572
R1	6X	For panchromatic and infra-red films. Turns blue subjects darker, and red and green subjects lighter. Gives moonlight effect on daylight landscape scenes.	112544	112554	112574
	249404	FOR COLOR FILM			
Skyligh 1A	t	For all daylight color film. For distant snow or mountain scenes on overcast days and for open shade under a clear sky to reduce excessive blue.	112319	112334	112364
80C		Use with daylight Kodachrome, Anscochrome and Ektachrome for flash bulb (except SM & SF) photography. Also gives cooler colors for early morning and late afternoon pictures and where fill in flash is used.	112323	112338	112368
80B	k ==05=	Use with the same daylight color films as above indoors with photofloods.	112320	112335	112365
81A		Use with the same daylight type color films as above indoors with electronic flash.	112321	112336	112366
82A		Use with the same daylight type color films as above and with Kodacolor, Ektacolor, Agfacolor CN 14 and CN 17 in early morning and late afternoon.	112322	112337	112367
85B	A ple:	For use with indoor films (Type B) such as Ektachrome B, High Speed Ektachrome B, and Super Anscochrome Tungsten in daylight.	112317	112332	112362
85C	ols:	Use with indoor films (Type F), Kodachrome F and Ektachrome F in daylight.	112318	112333	112363

LENS ACCESSORIES... REPRODUCING APPARATUS

LENS ACCESSORIES

LENS	Filter Size	Filter Size LENS HOOD with leather case		LENS	LENS CAP		CAP R
Super Canomatic					signa from h	distansmun nem	or of . 7
35mm F/2.5R	58mm	112619	\$ 9.95	112526	\$1.00	112630	\$1.00
58mm F/1.2R	58mm	112620	\$ 9.95	112526	\$1.00	112630	\$1.00
50mm F/1.8R	58mm	112620	\$ 9.95	112526	\$1.00	112630	\$1.00
85mm F/1.8R	58mm	112520	\$13.50	112526	\$1.00	112630	\$1.00
100mm F/2R	58mm	112520	\$13.50	112526	\$1.00	112630	\$1.00
135mm F/2.5R	58mm	112520	\$13.50	112526	\$1.00	112630	\$1.00
Canomatic		10-8			12421	Dale Medic V 148	(1=10 k)
200mm F/3.5R	58mm	112520	\$13.50	112526	\$1.00	112630	\$1.00
R Lens (Preset)							
100mm F/3.5R	40mm	112518	\$ 4.50	112523	\$.75	112630	\$1.00
135mm F/3.5R	48mm	112519	\$ 4.95	112524	\$.75	112630	\$1.00
R Lens (Manual)							
300mm F/4R	48mm	Supplie	d w/Lens	10	0mm ³	112630	\$1.00
400mm F/4.5R	48mm	Supplie	d w/Lens	10	0mm ³	112630	\$1.00
600mm F/5.6R	48mm	Supplie	d w/Lens	11	8mm ³	112630	\$1.00
800mm F/8R	48mm	Supplie	d w/Lens	11	2mm ³	112630	\$1.00
1000mm F/11R	48mm	Supplie	d w/Lens	10	0mm ³	112630	\$1.00

³Special Order.

Copy Stand Model 3 R

A must for every phase of close-up photography including macrophotography, when use in conjunction with Bellows R and or extension rings and tubes; photomicrography, when use with Bellows R and photomicrographic Hood; or simple copy work when use with Close-Up lenses.

112688 \$99.95



Note-Each Complete Set consists of the following:

STANCHION: Upright post attached to base board on which copying apparatus is mounted.

CARRYING ARM: Sliding arm, mounts camera to Stanchion. Can be mounted in either upward or downward position depending upon magnification desired.


CAMERA HOLDER R3: Hold camera perfectly level for precise copy work.

58mm CLOSE-UP LENS 450. In plastic case. Attaches to camera lens for greater magnification.

BASE BOARD: Made especially flat for precise copy work.

CASE: For storage of apparatus when disassembled.

DIAGRAM SHOWING VARIOUS COMBINATIONS OF LENS, ADAPTER, AND BELLOWS R

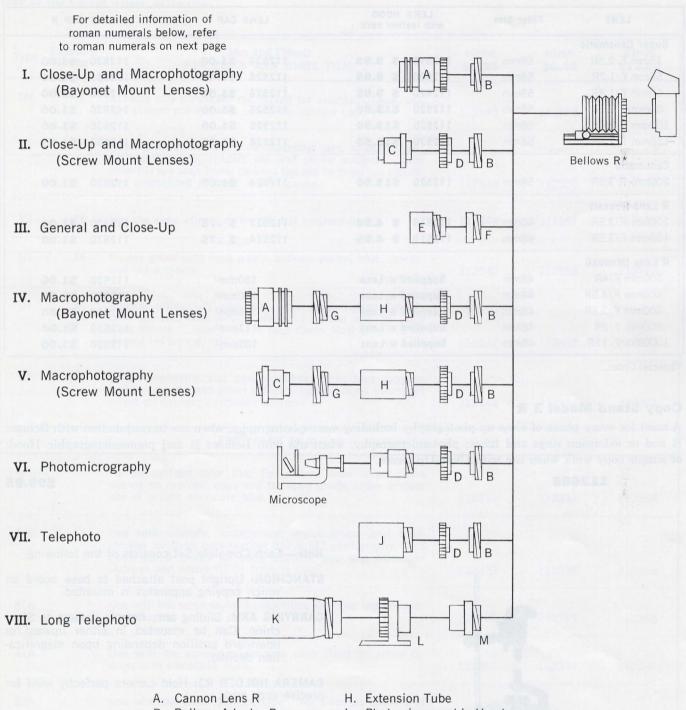

- B. Bellows Adapter R
- C. Canon Lens
- D. Lens Mount Converter A
- E. Lens Head
- F. Lens Head Adapter
- G. Macrophoto Coupler
- I. Photomicrographic Hood
- J. Canon Lens 200 mm F 3.5
- K. Lenses over 300 mm
- L. Lens Supporter
- M. Lens Intermediate Tube

^{*}Bellows Adapter R removable from Bellows R

BELLOWS R AND ALLIED ACCESSORIES

(Their Combination and Use)

	Nature of	Lens Used	Other Accesso	ories Required	Performance Data					
	Photography	Together	Essential	Desirable	Focusing Range	Magnification				
	1	2	3	4	5	6				
I.	Close-Up & Macrophoto	R 50 mm F 1.8		Waist Level Viewer	201 mm—275 mm 7 ¹⁵ / ₆ "—10 ³ / ₄ "	1/1.4×—3.1				
	AND HE HOLD O	R 85 mm F 1.9		00.912	327 mm—389 mm 12 ¹ 3/ ₁₆ "—155/ ₁₆ "	1/2.3×—1.9				
	(Stanour d. Jena) appress 22 -1.3	R 100 mm F 2, 3.5		n 516.50	388 mm—498 mm 151/4"—195/8"	1/2.7×—1.6				
	All a cigan	R 135 mm F 3.5		02.332	541 mm—803 mm 21¾"—31¾"	1/3.7×—1.2>				
II.	a danka	25 mm F 3.5	Mount Converter A	n /ina	116 mm—232 mm 4%6"—91/8"	2.0×—7.1				
	I MS" ASI	28 mm F 2.8, 3.5	Lamenta " Ode	93.50	125 mm—239 mm 5"—9¾"	1.8×—6.2				
	FIA X"ETA I	35 mm F 1.5, 1.8, 2.8	240 " intimity O.Smith	56.85 "	143 mm—256 mm 513/6"—101/6"	1.5×—5.0				
	u	50 mm F 1.2, 1.8, 2.8	п	п 3/15	206 mm—296 mm 81/8"—115/8"	1.0×—3.4				
	и	85 mm F 1.5, 1.9	н	н	336 mm—385 mm 13¼"—15½"	1/1.6×—2.1				
		100 mm F 2, 3.5	E LEADER RIVER	E DIE DIOXENDAL	400 mm—443 mm 15¾"—17¼6"	1/1.9×—1.8				
	n n	135 mm F 3.5	"	ments	537 mm—664 mm 211/8"—261/8"	1/2.6×—1.3				
III.	General & Close-Up	85 mm F 1.9 (Chrome Mount)	Lens Head Adapter for 85 F 1.91	.00mm	Infinity—35 cm (13.7")	up to 1.4×				
	ove E Book	100 mm F 3.5	for 100 F 3.51		Infinity—41 cm (16.1")	up to 1.2×				
	erice je najmin na na tu objekt	100 mm F 2	for 100 F 2		II .	up to 1.2×				
	"Station is it necessary	135 mm F 3.5 (Chrome Mount)	for 135 F 3.51	MCROPHOTO STRU	Infinity—54 cm (21.5")	up to 1.0×				
IV. & V.	Macrophoto (2×-6×)	R 50 mm F 1.8	58 mm Macrophoto Coupler, Lens Mount Converter A, Extension Tubes	Waist Level Viewer Copy Stand 3 R	Dependir Extension See Note	n Tubes				
VI.	Photomicro- graphy	Not used	Photomicrographic Hood, Lens Mount Converter A, Microscope	Copy Stand 3 R	nie bon wow yoos so no ghated cromp om andu't no annivel osse A) ind galla nolanets	9-				
VII.	Telephoto	200 m F 3.5	Mount Converter A	and the line	Monelles King A (Servicencies Richard & (Ser					
VIII.	Long Telephoto	300 mm to 1000 mm	Lens Supporter Intermediate Tube	Emmil. Emmil.		e Lens ecifications art				

Note: (1) Lenses marked R are for lenses for Canonflex; others are for lenses for range-finder type cameras.

⁽²⁾ Extension Tube 25 mm for 2—4.5 \times , 50 mm for 2.5—4.9 \times , 75 mm for 3—5.4 \times , 100 mm for 3.5 \times —6.1 \times , 150 mm for 4.5—6.4 \times , and 200 mm for 5.4 \times —6.4 \times

⁽³⁾ Waist Level Viewer cannot be used with Canonflex RP

^{★(1)} Use Lens Head only, unscrewing the helicoid. Also, remove Bellows Adaptor R from Bellows R

CLOSE UP-MACROPHOTOGRAPHY-PHOTOMICROGRAPHY

CLOSE UP ACCESSORIES

BELLOWS R

Multi-purpose accessory designed exclusively for use with single lens reflex camera. Attaches between the lens and camera body for focusing on extreme close-ups, with macrophotography and telephoto lenses. It is simple to operate, lightweight, compact in design and extremely rugged in construction. Made with the same rigid precision care as the other Bell & Howell/Canon products. With Case.

112144	\$55.00

58mm Close-Up Lens 450 in Plastic Case 112133	\$16.50
58mm Close-Up Lens 240 in Plastic Case 112134	\$16.50
Lens Mount Converter A (2.8mm) 112135	\$11.50
Lens Head Adapter for 100mm F/3.5 Lens (Serial No. up to 800001)	
112136	\$5.50
Lens Head Adapter for 100mm F/2 Lens 112137	\$6.95
Lens Head Adapter for 135mm F/3.5 Lens	

For close-up photography, both screw into the front of the
Super Canomatic Lens R 50mm F/1.8 (standard lens). 450
has focusing range from 55cm to 33cm (approx. 22"-13"). 240
has focusing range from 33cm to 26cm (approx. 13"-10").

Canon Close-Up Lenses 450 and 240

	Distance	Field of	Reduc- tion Ratio	
Scale		in millimeter		
450	infinity —0.6mm	316mm×210mm 166mm×111mm	$12\frac{1}{2}" \times 8\frac{1}{4}"$ $6\frac{1}{2}" \times 4\frac{1}{4}"$	1/9 1/4.6
240	infinity —0.6mm	166mm×111mm 112mm× 75mm	6½"×4¼" 4¼"×3"	1/4.6 1/3.6



(Serial No. up to 800001)

112138

MACROPHOTO ACCESSORIES

MACROPHOTO E	XTENSION TUBES	
25mm	112589	\$ 3.50
50mm	112590	\$ 4.50
75mm	112591	\$ 5.95
100mm	112592	\$ 7.50
150mm	112593	\$ 9.95
200mm	112594	\$12.50

MACROPHOTO COUPLER 58mm

\$6.95

Use to Couple 50mm F/1.8 Super-Canomatic Lens with Extension Tubes.

112695	\$4.95

MACROPHOTO STRUT

For use with extension tube combinations in excess of 75mm. This is necessary to hold the lens in correct relationship with the subject with long extension tubes to prevent distortion and improper focus.

112598 \$5.95

EXTENSION RINGS

For copy work and simple macrophotography where the magnification obtained with the Macrophoto Extension Tubes is not necessary or to be used in conjunction with Macrophoto Extension Tubes.

Extension Ring Set (A, B, and C)	112689	\$7.00
Extension Ring A (6mm)	112690	\$2.35
Extension Ring B (9mm)	112691	\$2.50
Extension Ring C (12mm)	112692	\$2.75
Mount Converter B (13.2mm)		to min DDE

A type of extension ring attached between the Canonflex lens and Extension Ring or Extension Tube. Mainly used for simple macrophotography without using a Bellows R.

112693 \$6.50

Photomicrography Accessory

Photomicrographic Hood

112549

\$7.50

NOTE: Refer to Table for Combination and Use of Bellows R, Lens Mount Converter A, Lens Head Adapter etc., on pages 8, 9, 11 and 12.

EXTREME CLOSE-UP, MACROPHOTOGRAPHY with a Canonflex

without Bellows R

A Canonflex with Super Canomatic R 50 mm F 1.8 can be used for various ranges of extreme close-up photography and macrophotography by inserting between the camera body and the lens various extension rings and tubes singly or in combination, without Bellows R.

Below, illustrated with a performance table, is a typical combination example using a Mount Converter A (which gives an extension of 2.8 mm), Mount Converter B (which gives an extension of 13.2 mm) and an Extension Ring A (which gives an extension of 6 mm).

COMBINATION:

(1) (2) (3)
Canonflex Body+Lens Mount Converter A+Extension Ring A
(4) (5)

+Lens Mount Converter B+Super Canomatic R 50 mm F 1.8

PERFORMANCE:

at LENS DISTANCE SCALE POSITION (Meter) can be focused for OBJECT-TO-FILM DISTANCE to cover FIELDS-OF-VIEW

with REDUCTION by increasing EXPOSURE

∞~0.6 mm 245~226 mm 55×83~45×68 m

 $55 \times 83 \sim 45 \times 68 \text{ mm}$ $1/2.3 \sim 1/1.9$ $2 \times \sim 2.3 \times$

REFERENCE DATE FOR CLOSE-UP WORK with a Canonflex

using a Bellows R

(A)	Bellows	R+Lenses	tor	Canonflex

R 50 mm F1.8

Bellows R Scale	0	10	20	30	40	50	60	70	80	90	100	110	125
Distance from film plane to object	207	201	201	204	209	214	221	329	237	245	253	262	275
Magnification	1/1.4	1/1.1	1.1	1.3	1.5	1.7	1.9	2.1	2.3	2.5	2.6	2.8	3.1

R 85 mm F 1.8

Distance from film plane to object	389	355	340	332	328	327	329	332	336	341	347	354	364
Magnification	1/2.3	1/1.8	1/1.5	1/1.3	1/1.1	1	1.1	1.3	1.4	1.5	1.6	1.7	1.9

R 100 mm F 2

Distance from film plane to object	498	450	421	405	393	490	388	388	390	394	398	403	411
Magnification	1/2.7	1/2.2	1/1.8	1/1.5	1/1.3	1/2.1	1	1.1	1.2	1.3	1.4	1.5	1.6

R 135 mm F 3.5

Distance from film plane to object	803	706	648	610	584	567	556	548	544	541	541	542	545
Magnification	1/3.7	1/2.9	1/2.4	1/2	1/1.8	1/1.6	1/1.4	1/1.3	1/1.2	1/1.1	1	0.1.1	1.2

Note 1. 1 inch=2.54mm

CANONFLEX RM ACCESSORIES

(B) LENS HEAD of 100mm and 135mm Lens for Rangefinder Cameras + LENS HEAD ADAPTER + BELLOWS R 100mm F 2 100mm F 3.5

Bellows R Scale	0	10	20	30	40	50	60	70	80	90	100	110	(125)
Distance from film plane to object	00	0.88	0.54	0.43	0.38	0.36	0.35	0.34	0.34	0.34	0.34	0.34	0.35
Magnification	BUI TE	1/8.4	1/4.2	1/2.8	1/2.1	1/1.7	1/1.4	1/1.2	1	1.1	1.2	1.3	1.4
135mm F 3.5											n correct	n sovie	dida
Distance from film plane to object	00	2.1	1.2	0.91	0.75	0.68	0.63	0.6	0.58	0.56	0.55	0.55	0.54
Magnification	70 in 210	1/13.4	1/6.7	1/4.5	1/3.4	1/2.7	1/2.2	1/1.9	1/1.7	1/1.5	1/1.3	1/1.3	1
C) CANON LENS for 25mm	RANGE-F	INDER (CAMERA	+ LEN	S MOU	NT CON	VERTER	A + BI	ELLOWS	R + C/	ANONFL	EX	O TRE
Scale	0	10	20	30	40	50	60	70	80	90	100	110	(125)
Distance from film plane to object	116	124	132	141	151	160	169	179	188	198	208	218	232
Magnification	2	2.4	2.9	3.3	3.7	4.1	4.5	4.9	5.3	5.7	6.1	6.5	7.1
28mm													
Distance from film plane to object	125	133	141	150	159	168	177	186	196	205	215	225	239
Magnification	1.8	2.2	2.5	2.9	3.2	3.6	3.9	4.3	4.6	5	5.3	5.7	6.2
35mm			alleni alleni	H a	wolleE	F.12	MS'N						
Distance from film plane to object	148	154	161	169	177	186	195	204	213	222	232	241	256
Magnification	1.5	1.8	2	2.3	2.6	2.9	3.2	3.4	3.3	4	4.3	4.6	5
50mm		TES	oce.	Part of the last o	A IS	209	102	105	los en	Talleri 26v	o mile	mori so	Distan
Distance from film plane to object	206	208	212	218	224	232	239	247	256	264	273	282	296
Magnification	1	1.2	1.4	1.6	1.8	1.9	2.1	2.3	2.5	2.7	2.9	3.1	3.4
85mm					2192						mbit	mont so	Distan
Distance from film plane to object	355	343	338	336	337	339	343	348	354	360	367	374	385
Magnification	1/1.6	1/1.3	1.1	1	1.1	1.2	1.4	1.5	1.6	1.7	1.8	2	2.1
100mm	and Ar			10 10			10				2.39	i mm C	OT A
Distance from film plane to object	443	423	410	404	401	400	401	404	408	413	418	424	434
Magnification	1/1.9	1/1.6	1/1.3	1/1.2	1/1.1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.8
135mm		12003									7 6	e a mm e	RIS
Distance from film plane to object	664	619	589	569	556	547	541	538	537	537	539	542	547
plane to object													

Note: Usually, telephoto lens is more recommendable for macrophoto than wide angle lens.