




Graflex xl Flash
Bracket Guidebook

graflex[®] xl
camera systems


This new bracket is designed expressly for Graflex xl cameras. It features a convenient Captive xl Flash Bracket Cord for easier and more reliable flash attachment. And it holds all flash equipment utilizing Graflite® Heavy Duty Mounting Clamps.

Attaching xl Flash Bracket to Camera

1. Align the two rigid-mounting posts with the corresponding threaded holes in the side of your xl camera (Fig. 1).
2. With a standard screwdriver, thread the bracket retaining screws into the threaded holes in the side of the camera. Tighten firmly (Fig. 1).

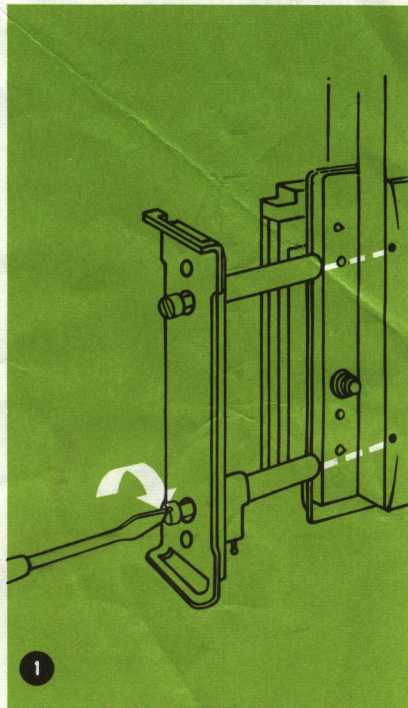

2

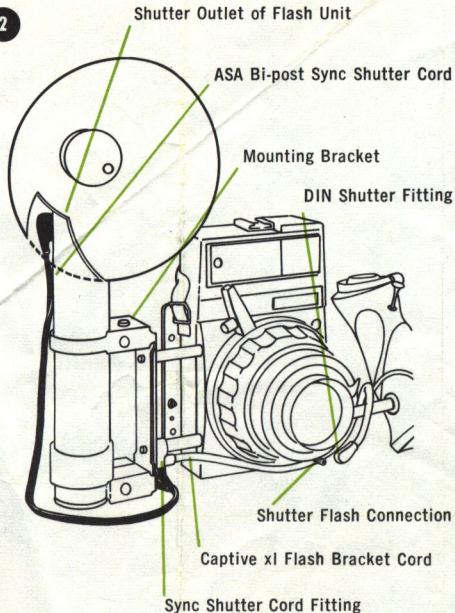

Connecting Sync Shutter Cord

1. Connect ASA Bi-post Sync Shutter Cord exactly as shown, to obtain proper polarity. Bring the Bi-post Cord forward from the fitting on the Captive xl Flash Bracket cord and downward from the Shutter Outlet on the flash unit (Fig. 2). If constant cycling of electronic flash occurs, reverse the connection of the Bi-post Cord to Captive xl Flash Bracket Cord.

2. Connect free end of Captive xl Flash Bracket Cord to flash connection on Shutter (Fig. 2).

Accessories

Standard Graflite synchronized shutter cords:

- 1.** ASA double-post 20" straight:
Cat. No. 2701
- 2.** ASA double-post 36" Expand-O-Cord:
Cat. No. 2810
- 3.** Replacement Captive xl Flash Bracket Cord:
Cat. No. 7492

Home Office:

3750 Monroe Avenue
Rochester, New York 14603

Western Division:

800 North Cole Avenue
Hollywood, California 90038

Midwest Service Department:

1345 Diversey Parkway
Chicago, Illinois 60614

Graflex of Canada Limited:

47 Simcoe Street
Toronto 1, Ontario, Canada



GRAFLEX, Inc.
Rochester, New York
14603, U.S.A.

A subsidiary of
General Precision
Equipment Corporation