


“MAKE THE CORRECTION ON THE NEGATIVE”

DOUBLE SWING BACK

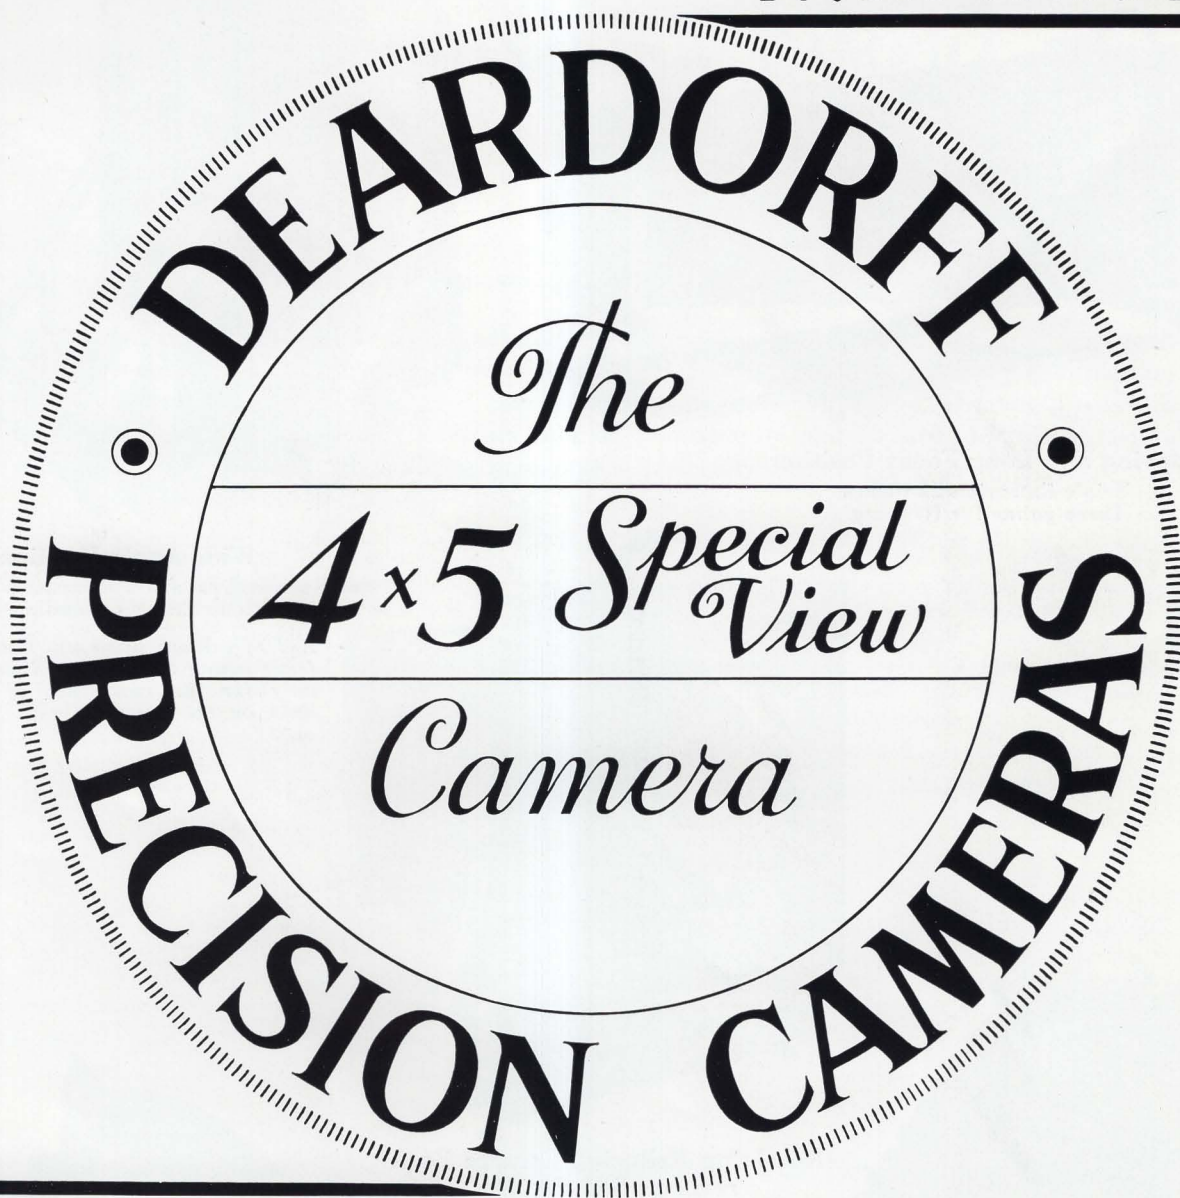

DOUBLE SWING FRONT

the **STANDARD VIEW CAMERA** *for*
Color and Black and White Photography

a compact rigid camera permitting the greatest possible image control, the greatest possible depth of field control at the largest possible "taking aperture"

L. F. DEARDORFF & SONS, INC.

11 SOUTH DES PLAINES STREET, CHICAGO 6, ILLINOIS


DESIGNERS AND BUILDERS OF PRECISION CAMERAS AND STANDS FOR CORRECTIVE PHOTOGRAPHY

Deardorff Swings for Corrective Photography




Copying and Long Focus Position

Triple Extension 22 inches
Three points for focusing

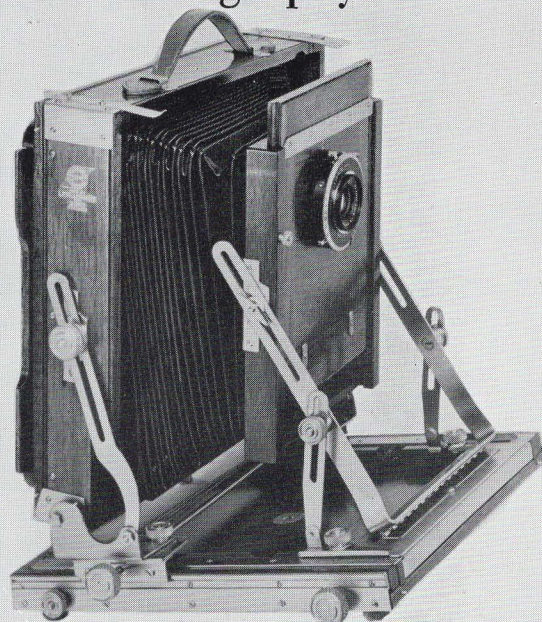


Wide Angle Position

of Back and Front for extreme Wide Angle
Lenses with no Cutoff or binding of bellows

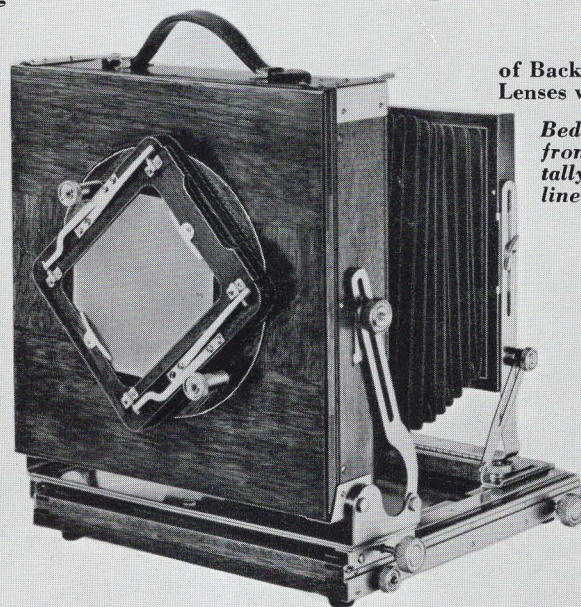


Bed of camera tilted up. Back and front swung vertically and horizontally for the correction of those lines on the negative

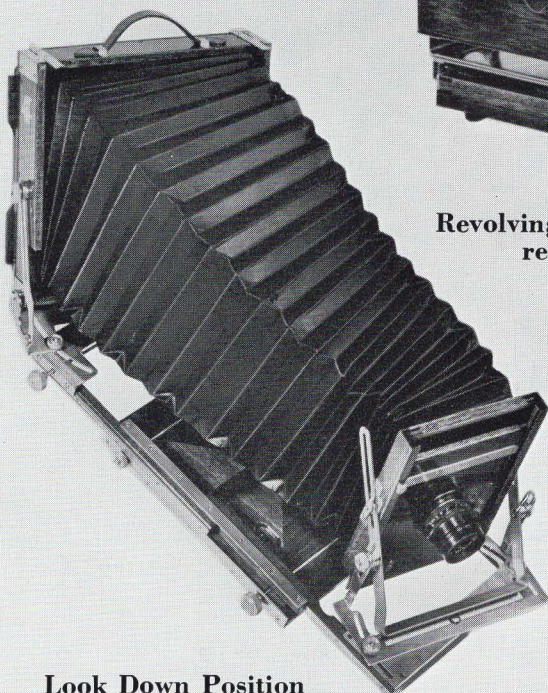

Look Down Position

Bed tilted down 30 degrees. Back and Front swung 30 degrees vertically and 20 degrees horizontally

**Revolving Reducing Camera Back
revolves 360 degrees**

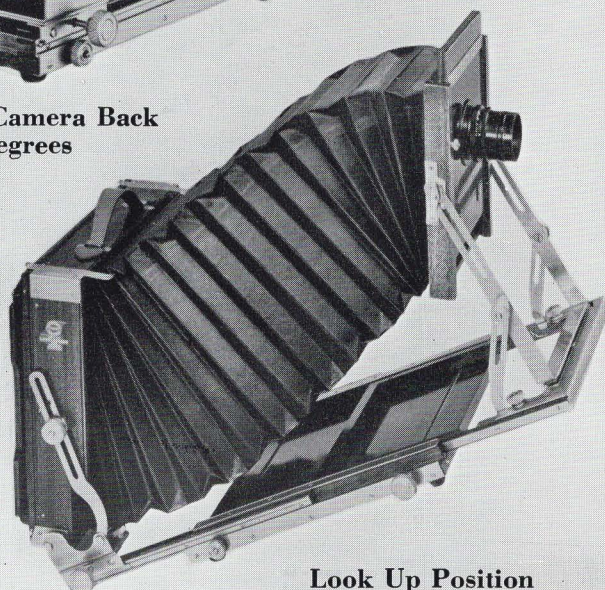

Look Up Position

Bed tilted up 30 degrees. Back and Front swung 30 degrees vertically and can be swung 20 degrees horizontally

DEARDORFF

PRECISION VIEW CAMERA

4/5 SPECIAL

THIS series made for many years has always led the field in perfection of design, compactness, rigidity, light weight, and ease of manipulation for making perfect reproductions.

The leading Commercial, Illustrative and Industrial Photographers throughout the United States and Canada not only welcomed this Camera but proclaimed it as the Standard of perfection. The possibilities for making reproductions showing detail, drawing, and perspective not possible heretofore, and also permitting special lighting effects, have improved immensely this field of photography and have made this Camera the most successful instrument ever offered to the "photographic fraternity".

SPECIFICATIONS

The Vertical Swing of the Back is 30° each side of center.
The Lateral Swing of the Back is 20° each side of center.
The Vertical Swing of the Front is 30° each side of center.
The Lateral Swing of the Front is 20° each side of center.
The front and rear Turntables are made of heavy gauge Stainless Steel.

The Front Standard is made of heavy gauge Steel.

The Front raises and lowers $2\frac{3}{5}$ " from center.

Back is square, reversible all the way around and supplied with cut-out boards.

Bed is made in four section, Tongue and Groove construction with grain in two directions. Metal Bed Plate with incorporated Tripod Socket reinforces and protects camera bed. It overcomes scratching when mounting camera to stand. The Box and Back are made with interlocking corners and are further reinforced with Metal.

The Lens Board is square and reversible all the way around.

Lenses with focal lengths from $3\frac{1}{2}$ " to 22" can be accommodated in this camera.

CAMERA

| Size of Plate | Focal Length of Lenses From | Total Extension | Size of Bellows at Back and Front of Camera | | Rise & Fall of Front Total Inches | Lens Board | Camera Closed | Wgt. in Lbs. |
|---------------|-----------------------------|-----------------|---|-------------------------------------|-----------------------------------|------------|--|--------------|
| | | | Back | Front | | | | |
| 4x5 Special | $3\frac{1}{2}$ | 22 | $8\frac{1}{4} \times 8\frac{1}{4}$ | $4\frac{3}{16} \times 4\frac{7}{8}$ | $4\frac{3}{8}$ | 4x4 | $9 \times 10\frac{1}{4} \times 3\frac{3}{4}$ | 7 |

REVERSIBLE CAMERA BACKS

REVOLVING CAMERA BACKS

| Size of Camera | Size of Back | Size of Camera | Size of Back |
|----------------|--|----------------|---|
| 4x5 Special | 4×5 $4 \times 5 - 3\frac{1}{4} \times 4\frac{1}{4}$ $4 \times 5 - 2\frac{1}{4} \times 3\frac{1}{4}$ | 4x5 Special | 4x5 Deardorff Back only $3\frac{1}{4} \times 4\frac{1}{4}$ supplied with Grafflok Fittings only |

**Can be supplied with Grafflok Fittings*

CAMERA LENS BOARD

| Size of Camera | Size of Board | Style of Board or Adapters |
|----------------|---------------|--|
| 4x5 Special | 4x4 | Deardorff Board Graphic C Board Pacemaker Adapter to receive Pacemaker Boards |

LENSES AND SHUTTERS For DEARDORFF CAMERAS

The table below lists lenses of several focal lengths for various phases of Commercial, Illustrative and Industrial Photography. It should be noted that the emphasis in the table is on Focal Lengths. These focal lengths definitely should be part of every photographers equipment because only by his choice of the proper focal length of lens can the best perspective and control of image distortion be accomplished.

LENS AND SHUTTER EQUIPMENT — 4x5 SPECIAL VIEW CAMERA WITH 22-INCH EXTENSION

3½" to 4½" E.F.L., f/6.8 to f/8 wide-angle lens in shutter;
for wide-angle photography.

6½" to 7" E.F.L., f/6.3 to f/6.8 lens in shutter;
for average work.


5" to 6¾" E.F.L., f/4.5 to f/6.8 lens in shutter;
for photo-flash photography.

8¼" to 10¼" E.F.L., f/6.3 to f/10 lens in shutter;
for corrective photography.


12" to 14" E.F.L., f/9 to f/10 lens in shutter;
for corrective photography.

Catalogues of the leading lens makers may be had upon request. Advice on the correct types and focal lengths of lenses for any photographic problem given to anyone presenting their difficulties in writing with suitable photographs.

ACCESSORIES FOR 4x5 SPECIAL VIEW CAMERA

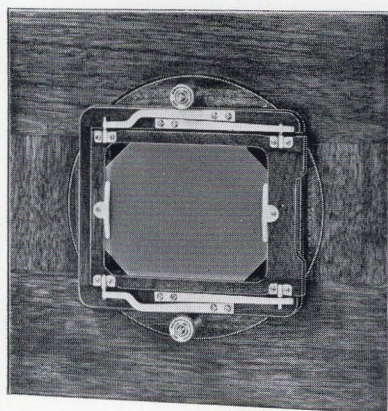

Revolving Camera Backs
for 4x5 or 3¼ x 4¼
film sizes

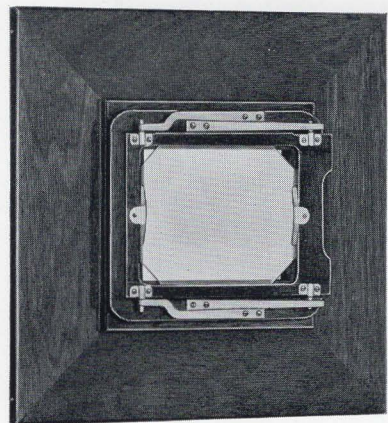

Reversible Camera Backs
for 4x5 or 3¼ x 4¼
film sizes



Handi-Stand
6 Foot—8 Foot



DeLuxe Carrying Cases

CORRECTIVE PHOTOGRAPHY, by Lewis L. Kellsey, Cr. Photog., is an illustrated elementary textbook on Camera Swings And How To Use Them. The subject is presented in a simplified and understandable manner. Answers all questions about the practice of Corrective Photography. Every photographer should have a copy for reference purposes.

Published by

L. F. DEARDORFF & SONS, INC.