





## THE COMPACT RANGEFINDER TYPE GROUP

- Six precision compacts
- Two half frame models: PEN EE-3 and EES-2
- TRIP 35—the pocket-sized 35mm automatic with flash, case and wrist strap
- 35 ED with built-in flash and automatic exposure control
- 35RC with automatic aperture setting and Auto/Manual modes
- 35RD with automatic flash, automatic shutter speed setting and Auto/Manual
- Full range of appropriate filters, cases and accessories



**OLYMPUS**

COMPACT 35mm RANGEFINDER TYPE CAMERAS

**OLYMPUS TRIP-35 OUTFIT  
WITH PS 200 FLASH****KEY FEATURES**

- Pocket-sized dimensions and lightweight with full-frame 35mm capability
- 4-element f2.8 D. Zuiko lens for optimum definition
- Fast 4-symbol zone focusing with parallax correction for close-ups
- Electric Eye meter for fully automatic exposure control with manual override
- Shutter lock and red viewfinder-warning prevent underexposure
- Compact PS 200 Flash attaches via hot shoe

**SPECIFICATIONS****LENS:** 40mm f2.8 D. Zuiko; 4 elements in 3 groups.**LENS ACCESSORY SIZE:** 43.5mm threaded**EXPOSURE CONTROL:** Fully automatic Selenium Cell Electric Eye system sets the correct combination of shutter speed and lens aperture. Shutter speed can also be set manually. Shutter lock prevents underexposure. Manual override for manual shutter speed control. EV Range (ASA 100): EV 8.32 (f2.8, 1/40 second) to EV 17.14 (f16, 1/200 second).**SHUTTER SPEED RANGE:** 1/40 to 1/200 on AUTO, 1/40 on MANUAL**FILM SPEED RANGE:** ASA 25 to 400**VIEWFINDER:** Luminous bright frame with parallax correction markings and red-light underexposure warning**FOCUSING:** 4-scale zone focusing (zones visible in viewfinder) with distance scale for close-up, portrait, medium, and long ranges**FLASH:** Compact electronic PS 200 Flash connects via hot shoe. Guide number 46 (ASA 100).**FILM ADVANCE:** Thumb-operated film advance roller at camera rear cocks shutter and advances film and exposure counter. Double exposure and double-winding prevention.**DIMENSIONS:** 4 $\frac{3}{4}$ " wide x 2 $\frac{3}{4}$ " high x 2" deep (116 x 70 x 57mm)**WEIGHT:** 14.4 ounces (410 grams)**ORDERING INFORMATION****Trip-35 Outfit with PS 200 Flash**

Stock No. 102-005

COMPLETE WITH  
PS 200 FLASH,  
POUCH CASE,  
AND WRIST STRAP





**OLYMPUS**

COMPACT 35mm RANGEFINDER TYPE CAMERAS

**OLYMPUS 35RC****Auto or Manual.  
Rangefinder Accuracy****KEY FEATURES**

- Lightweight and compact full-frame 35mm
- Automatic or manual exposure control
- Full information viewfinder
- Automatic flash
- Self timer
- Hot shoe

**SPECIFICATIONS****LENS:** 42mm f2.8 E. Zuiko. 5 elements in 4 groups.**LENS ACCESSORY SIZE:** 43.5mm screw-in**EXPOSURE CONTROL:** Fully automatic shutter coupled system uses ultrasensitive CdS Meter system to automatically select proper aperture. Aperture can be set manually when aperture ring is taken off of automatic ("A") position.**POWER SOURCE:** One 1.35v mercury battery (Eveready E625N, Mallory PX625, or equivalent)**SHUTTER SPEED RANGE:** Can be set for B, 1/15, 1/30, 1/60, 1/125, 1/250, and 1/500 sec.**FILM SPEED RANGE:** ASA 25 to 800**VIEWFINDER:** Luminous bright frame with parallax correction markings shows shutter speeds, aperture, low-light level warning. Features double image rangefinder.**FOCUSING:** Easy-to-view double image rangefinder.**FLASH:** Automatically adjusts flash exposure with focus. Synchronizes at 1/30th sec. with flash bulbs and at all speeds with electronic flash. Guide number range: 32-130.**FILM ADVANCE:** Lever type at rear of camera body advances film and exposure counter. Double exposure prevention.**DIMENSIONS:** 4-1/4" wide x 2-3/4" high x 1-15/16" thick.**WEIGHT:** 14-1/2 oz.**ORDERING INFORMATION****Olympus 35RC Kit**

Stock No. 102-100

COMPLETE WITH  
POUCH CASE  
AND WRIST STRAP





**OLYMPUS**

COMPACT 35mm RANGEFINDER TYPE CAMERAS

**OLYMPUS 35 ED****Full-Frame Automatic 35mm Rangefinder Camera with Electronic Shutter****KEY FEATURES**

- Shutter speeds from 4 seconds to 1/800th second for virtually any light conditions
- 4-element 38mm f2.8 lens produces razor sharp pictures
- Built-in Hot Shoe for cordless electronic flash synchronization
- Self-Timer so you can get in the picture!
- New softer, quieter shutter release

**SPECIFICATIONS**

**LENS:** 38mm f2.8 D. Zuiko. 4 elements in 3 groups. Minimum focusing distance: 36" (91.4cm). Aperture Range: f2.8 to f13

**LENS ACCESSORY SIZE:** 43.5mm threaded

**EXPOSURE CONTROL:** Fully automatic electronic shutter coupled with an ultrasensitive CdS Meter system. Electronic exposure control automatically selects proper shutter speed and aperture combination. EV Range: EV 1 (f2.8, 4 sec.) to EV 17 (f13, 1/800th sec.)

**POWER SOURCE:** Two 1.4V mercury batteries (Eveready E640, Mallory RM-640 or equivalent)

**SHUTTER SPEED RANGE:** 4 seconds to 1/800th second.

**FILM SPEED RANGE:** ASA 25 to 800 (DIN 15 to 30)

**VIEWFINDER:** Luminous bright frame with parallax correction markings. Yellow lamp lights to indicate proper functioning of batteries and shutter. Green lamp lights to indicate flashmatic setting.

**FLASH:** Automatically adjusts flash exposure with camera focus. Connection of flash unit automatically switches exposure to flashmatic setting. Guide number range: 32 to 130. Hot shoe built into camera top with auxiliary flash PC sync terminal located on side.

**OTHER FEATURES:** Battery check light visible in the viewfinder as well as from the front of the camera. Self-timer with 10-second delay. Shutter release threaded for standard cable release. Easy load film take-up spool. Flip-up handle for fast and easy rewinding. Numerical sequence exposure counter with automatic reset.

**FILM ADVANCE:** Single or multiple stroke lever advances film and exposure counter and cocks shutter. Double exposure and double winding prevention.

**DIMENSIONS:** 4½" wide x 2¾" high x 2" deep (114 x 71 x 51mm)

**WEIGHT:** 14.6 ounces (415g)

**ORDERING INFORMATION**

**Olympus 35 ED Camera**

Stock No. 102-300

COMPLETE WITH  
POUCH CASE,  
LENS CAP, WRIST STRAP  
AND PX 640  
MERCURY BATTERY.





**OLYMPUS**

COMPACT 35mm RANGEFINDER TYPE CAMERAS

**OLYMPUS 35 RD****Full Frame Automatic 35mm Rangefinder Camera with Manual Override****KEY FEATURES**

- Manual Override for complete creative control
- Fast 6-element 40mm f1.7 lens for sharp pictures even in low light
- Focuses as close as 34" (86cm)
- Automatic Flash Exposure Control sets correct aperture for flash as lens is focused
- Shutter Release Locking System prevents under- and overexposure with automatic camera operation
- Shutter speeds from 1/2 to 1/500 second plus bulb
- Built-in Hot Shoe and PC Connection both provided for your choice of flash operation
- Self-Timer so you can be in the picture!
- Viewfinder control center

**SPECIFICATIONS**

**LENS:** 40mm f1.7 F. Zuiko. 6 elements in 4 groups. Minimum focusing distance: 34 inches (86.4cm)

**LENS ACCESSORY SIZE:** 49mm threaded

**LENS CAP SIZE:**

**EXPOSURE CONTROL:** Shutter speed preferred automatic exposure control coupled with an ultra-sensitive CdS Meter system. Electronic exposure control automatically selects proper f-stop for use with manually selected shutter speed. Shutter release locking system prevents over- and underexposure. Manual override for manual selection of both shutter speed and aperture. EV Range (ASA 100): EV 2.5 (f1.7, 1/2 second)—EV 17 (f16, 1/500 second)

**POWER SOURCE:** One 1.35V mercury battery (Eveready E625N, Mallory PX625, or equivalent)

**SHUTTER SPEED RANGE:** B, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500

**FILM SPEED RANGE:** ASA 25-800 (DIN 15 to 30)

**VIEWFINDER:** Luminous bright frame finder (Magnification 0.6) with parallax correction markings, f-stop scale, and red-zone underexposure warning.

**FOCUSING:** Double image coupled rangefinder. Straight helicoid. Focus range: 2.8 ft (0.85m) to infinity ( $\infty$ )

**FLASH:** Automatically adjusts flash exposure with camera focus. Electronic flash synchronization at all shutter speeds. Bulb flash synchronization at 1/30 second. Guide number range: 45-90 (feet); 14-28 (meters). Hot shoe built into camera top with auxiliary flash PC sync terminal located on side.

**OTHER FEATURES:** Numerical sequence exposure counter with automatic reset. Shutter release threaded for standard cable release. Easy load film take-up spool. Flip-up handle for fast and easy rewinding. Shutter release locks when batteries are weak or not inserted correctly. Self-timer with 10-second delay.

**FILM ADVANCE:** Single or multiple stroke lever advances film and exposure counter and cocks shutter. Double exposure and double winding prevention.

**DIMENSIONS:** 4 1/2" wide x 2 3/4" high x 2 1/4" deep (114 x 71 x 59mm)


**WEIGHT:** 17 ounces (470g)

**ORDERING INFORMATION**

**Olympus 35 RD Camera**

Stock No. 102-400

COMPLETE WITH  
SEMI-HARD CASE,  
LENS CAP,  
SHOULDER STRAP AND  
1.35V MERCURY BATTERY.

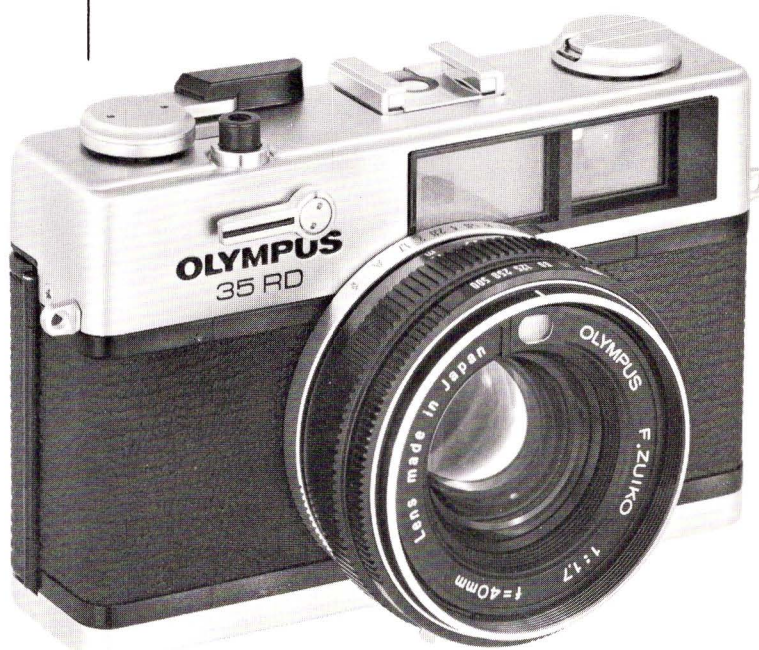



**OLYMPUS**

COMPACT 35mm RANGEFINDER TYPE CAMERAS

**OLYMPUS PEN EES-2****Half-Frame 35mm Camera****KEY FEATURES**

- Lightweight, compact
- Automatic electric eye exposure control with manual override
- Fast focusing with 4 zone settings and parallax correction marks
- Shutter lock and red-light viewfinder warning prevent underexposure
- Compact PS 200 Flash and Quick Flash units attach via hot shoe

**SPECIFICATIONS**

**LENS:** 30mm f2.6 D. Zuiko. 4 elements in 3 groups. Aperture range from f2.8 to f22. Zone focus click-stop positions of 3 feet, 5 feet, 10 feet, and infinity.

**LENS ACCESSORY SIZE:** 43.5mm threaded

**EXPOSURE CONTROL:** Fully automatic programmed Selenium Cell Electric Eye system sets correct combination of shutter speed and lens aperture. Automatic warning signal in viewfinder for incorrect exposure. Manual override disengages electric eye. EV Range (ASA 100): EV 8.32 (f2.8, 1/40 second) and EV 17.14 (f16, 1/200 second)

**SHUTTER SPEED RANGE:** 1/40 or 1/200 on AUTO, 1/40 on MANUAL

**FILM SPEED RANGE:** ASA 25 to 400

**VIEWFINDER:** Luminous bright frame with parallax correction markings and red-light underexposure warning. Focusing zones are visible in the viewfinder.

**FOCUSING:** 4-symbol zone focusing with distance scale for close-up, portrait, medium, and long ranges

**FLASH:** Fully synchronized for M, F, and X (electronic flash). Accepts PS 200 Flash and PS 200 Quick Flash through hot shoe socket.

**FILM ADVANCE:** Thumb-operated film advance roller at camera rear cocks shutter and advances film and exposure counter. Counter resets automatically when film compartment opened. Double exposure prevention.


**DIMENSIONS:** 4 1/4" wide x 2 5/8" high x 2" deep (104 x 64 x 49mm)

**WEIGHT:** 13 ounces (364 grams)

**ORDERING INFORMATION**

**Pen EES-2 Camera Outfit**

Stock No. 102-900

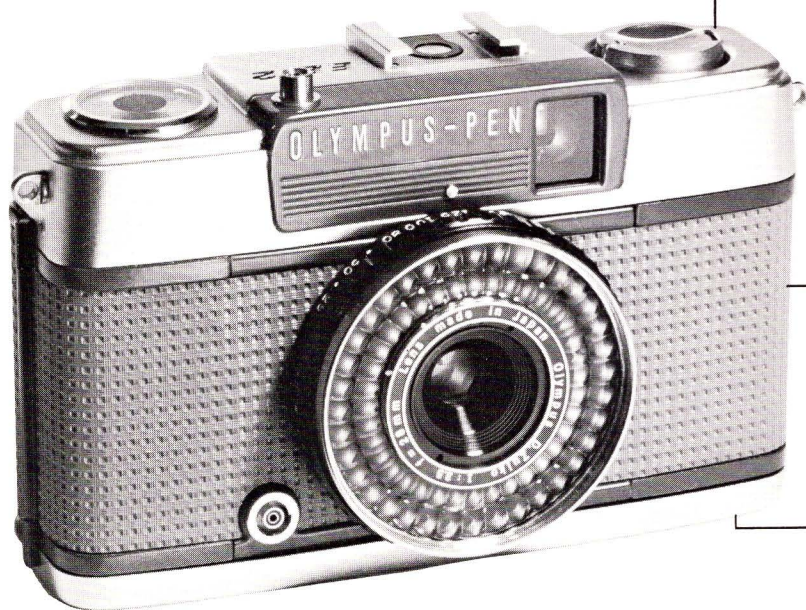

COMPLETE WITH  
POUCH CASE AND  
WRIST STRAP



**OLYMPUS PEN EE-3**  
**Half-Frame 35mm Camera****KEY FEATURES**

- Lightweight, compact
- Automatic electric eye exposure control with manual override
- Fixed frame focus leaves nothing to do but shoot
- Shutter lock and red-light viewfinder warning prevent underexposure
- Hot Shoe socket for PS 200 and PS 200 Quick Flashmatic units

**SPECIFICATIONS**

**LENS:** 28mm f3.5 D. Zuiko. Aperture range from 5 feet to infinity.

**LENS ACCESSORY SIZE:** 43.5mm threaded

**EXPOSURE CONTROL:** Fully automatic programmed Selenium Cell Electric Eye system sets correct combination of shutter speed and lens aperture. Automatic warning signal in viewfinder for incorrect exposure. Manual override disengages electric eye. EV Range (ASA 100): EV 8.32 (f2.8, 1/40 second) and EV 17.14 (f16, 1/200 second).

**SHUTTER SPEED RANGE:** 1/40 or 1/200 on AUTO, 1/40 on MANUAL

**FILM SPEED RANGE:** ASA 25 to 400

**VIEWFINDER:** Luminous bright frame with red light underexposure warning

**FOCUSING:** Fixed focus

**FLASH:** Fully synchronized for M, F, and X (electronic flash). Accepts PS 200 Flash and PS 200 Quick Flash through hot shoe socket.

**FILM ADVANCE:** Thumb-operated film advance roller at camera rear cocks shutter and advances film and exposure counter. Counter resets automatically when film compartment opened. Double exposure prevention.

**DIMENSION:** 4½" wide x 2⅝" high x 2" deep (104 x 64 x 49mm)

**WEIGHT:** 13 ounces (364 grams)

**ORDERING INFORMATION**

**Olympus Pen EE-3**

Stock No. 102-800



COMPLETE WITH  
POUCH CASE AND  
WRIST STRAP



**FILTERS**

Olympus filters are made of top-quality optical glass and they are guaranteed distortion-free. All extraneous light and aberrations have been eliminated, so filter will not affect picture quality of any lens. Filters fully coated on both sides to minimize flare and reflections.

SIZE/NAME	COLOR	DESCRIPTION	ORDERING INFORMATION
43.5mm UV-Haze	Colorless	Eliminates undesirable ultraviolet rays, which cause flat, dull pictures. For clear, detailed brilliance. May be used at all times to protect lens.	Stock No. 108-100
43.5mm Y2	Yellow	Accentuates contrast. Darkens blue sky, heightens white clouds. Use for copying documents with black or blue on light background.	Stock No. 108-101
43.5mm Skylight 1A	Colorless	Similar to UV filter, for use with color film only. Eliminates ultraviolet rays. Reduces haze and bluish tones in daylight photography. May be used at all times to protect lens.	Stock No. 108-102
43.5mm 81C	Amber	Reduces bluish tone on color film in cloudy or rainy weather.	Stock No. 108-103
43.5mm 82C	Blue	Reduces reddish tone on color film in early morning and late evening light.	Stock No. 108-104
43.5mm 85 A Conversion	Pink	Corrects type A color film for usage in daylight.	Stock No. 108-105
43.5mm ND-4X (Neutral Density)	Gray	Reduces quantity of light entering lens to 1/4 original intensity. For use in very bright conditions when wide aperture is desired.	Stock No. 108-106

**CLOSE-UP LENS, 43.5mm**

For use with Olympus TRIP-35, 35 RD, 35 ED, EE-3, and EES-2 compact rangefinder cameras. Reduces minimum focusing distance to less than half.

**ORDERING INFORMATION**

**Close-Up Lens, 43.5 mm**

Stock No. 104-003

**LENS HOODS**

Protect film from stray illumination when shooting into light.

**ORDERING INFORMATION**

**43.5MM Lens Hood**

**(for TRIP 35, 35 RD, 35 ED, EE-3, and EES-2)**

Stock No. 108-250

**49mm Lens Hood (for 35 RD)**

Stock No. 108-260



**POUCH CASE FOR  
35 RC CAMERA**

Zippered black leatherette case protects gleaming camera and lens surfaces. Folds compactly when camera is in use.

**ORDERING INFORMATION**  
**Pouch Case for 35 RC Camera**  
Stock No. 108-410

**POUCH CASE FOR  
35 ED CAMERA**

Soft black leatherette protection for camera and lens surfaces. Folds for easy storage anywhere.

**ORDERING INFORMATION**  
**Pouch Case for 35 ED Camera**  
Stock No. 180-420

**POUCH CASE FOR PEN EES-2  
AND EE-3 CAMERAS**

Replacement soft pouch for Olympus half-frame compacts. Compactly folds down while camera is in use.

**ORDERING INFORMATION**  
**Pouch Case for PEN EES-2 and EE-3**  
Stock No. 108-440

**EVEREADY CASE  
WITH NECK-STRAP  
FOR 35 RD CAMERA**

Replacement Eveready case is the ultimate in durable, easy-to-use protection.

**ORDERING INFORMATION**  
**Eveready Case with Neck-strap for 35 RD**  
Stock No. 108-430