
# SEKONIC DIGI MASTER model L-718

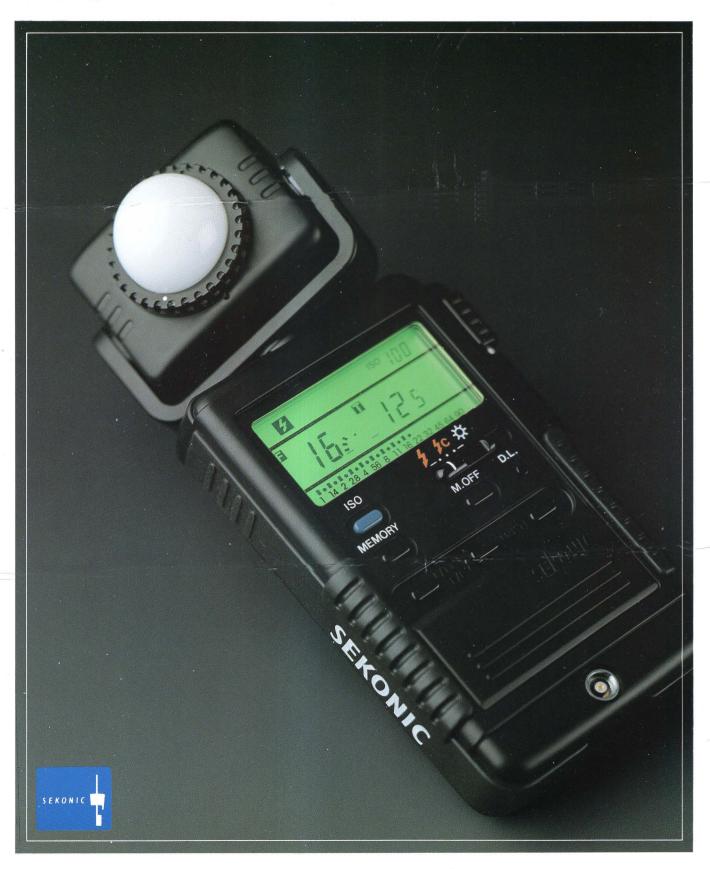

## SEKONIC DIGI MASTER model L-718

### intelligent measuring tool for smart pros

#### **DIGI MASTER** incorporates

- seven different functional modes; wired and wireless measurements for flash light, wired and wireless cumulative flash measurements, T-priority, F-priority and EV measurements for ambient light
- memory display function for measured 2 f-stop values
- running-lock function for continuous reading (ambient light)
- display illumination by electro luminescence
- rubber-covered body for preventing the meter from slipping out of your fingers



#### **Specifications**

#### Measuring system:

Incident and reflected light type for both flash and ambient light

#### Measuring range:

 $f/1.4 \sim f/90 + 0.9AV$  / ISO 100 (for flash light) EV (-) 1~EV19.9 / ISO 100 (for ambient light measurement)

#### Repeat metering accuracy:

± 0.1EV

#### Calibration constants:

C=340 K=12.5 (for Lumidisc: C=250)

#### Light receiving part

Sensor: Silicon Photodiode

Swivel head: 270° horizontally and 90° upward

rotatable

Attachments: Lumisphere and Lumidisc for incident light, Reflected light filter (acceptance angle 54°) and Viewfinder 5° (sold separately)

#### Display

Measuring mode: Wired and wireless measurements for flash light, wired and wireless cumulative flash measurements, ambient light measurement, cine scale and EV measurement

Film speed: ISO 3~8000 at 1/3 SV unit Shutter speed:

1 sec. ~1/500 sec. for flash light 30 min. ~1/8000 sec. for ambient light cine scale: 8, 16, 18, 24, 32, 64 and 128 fps.

f/stop:  $1.4 \sim 90 + 0.9$ AV for flash light  $1.0 \sim 90 + 0.9$ AV for ambient light

EV scale:  $(-)6 \sim 25.9$ 

Other display: E.u. (under-exposure), E.o. (over-

exposure) and battery check

Display illumination: Electro Luminescence "ECLAT" manufactured by Elix Co., Ltd., subsidiary of Sekonic

Power source:

2 × AA pen light battery (1.5V × 2)

#### Standard accessories:

Lumisphere, Lumidisc, Reflected light filter, neck strap, 2 batteries and case

#### Dimensions and weight:

 $157 \times 68 \times 28$ mm about 190 grams (excl. batteries)



## SEKONIC CO., LTD.

7-24-14, Oizumi-Gakuen-cho, Nerima-ku, Tokyo 178, Japan Phone: Tokyo (03) 978-5155 Telex: J 34376 SEKONIC Facsimile: (03) 978-5229 Cable: SEKONIC TOKYO

