


CODE NO. 3-31201-24
ITEM Canon AZ 1014 Electronic w/lens
 7-70mm f/1.4 hood and
 remote switch

Canon AUTO ZOOM 1014 ELECTRONIC

DISCONTINUED PRODUCT
 Please retain this section for reference purposes.

The Professional Quality Super 8

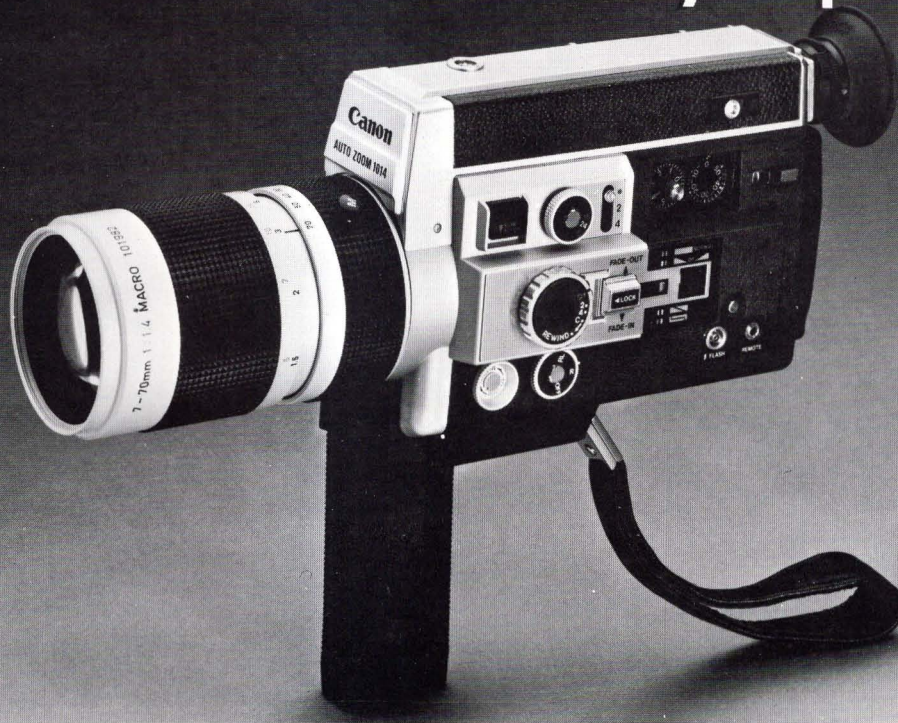

SPECIFICATIONS

- **Type:** 8mm movie camera with easy-loading system using Super 8 film cartridges
- **Picture Size:** 5.4x4.0mm
- **Lens:** 7-70mm f/1.4 with 10:1 zoom ratio; 18 elements in 13 groups; Super Spectra Coating; inner diameter 58mm, outer diameter 60mm
- **Viewfinder:** single-lens reflex type, combined with split-image rangefinder; meter information includes aperture scale, meter needle, over/under exposure warning marks, film-end caution lamp, shutter angle indicator and film transport indicator lamp; eyepiece adjustable from -4 to +2 diopters; built-in eyepiece shutter and eyecup
- **EE Mechanism:** through-the-lens type Servo EE mechanism with CdS photocell controlling aperture; coupled to film speed and filming speed
- **Light Measuring Range:** from ASA 400, f/1.4, 18 fps to ASA 16 f/32, slow-motion 54fps and single-frame shooting
- **Film Speed:** Automatically set by inserting the film cartridge. artificial light type: ASA 25, 40, 64, 100, 160, 250, 400 daylight type: ASA 16, 25, 40, 64, 100, 160, 250
- **CCA Filter:** Color Conversion A (CCA) filter built-in for using artificial light type film in daylight. Cancelled by inserting CCA filter cancellation adapter or lighting unit into CCA filter cancellation adapter socket. Automatically removed by inserting the daylight type cartridge.
- **Filming Speeds:** 18 fps, 24 fps, single-frame and instant slow-motion—about 54 fps
- **Variable Shutter Control:** 0° to 150° continuously; Automatic fading is possible by closing the shutter entirely.
- **Lap Dissolve and Superimposition:** Perfect lap dissolves and superimpositions are possible using the automatic rewinding and autofader mechanisms. 50 frames of lap dissolve or superimposition are possible.
- **Manual Aperture Control:** possible with EE/manual aperture control ring
- **Power System:** automatic filming and zooming by precise micromotors
- **Power Source:** six 1.5V penlight (AA) batteries, contained in body and handgrip; common power source runs filming system, zooming system and exposure meter
- **Power Zooming:** two speeds possible: H = 5 sec., L = 7 sec.
- **Manual Zooming:** with zooming ring, zooming speed switch at M, and 120° rotation angle
- **Running Ability:** 10 cartridges (approx.) at normal temperatures; 1.5 cartridges or more shooting single-frame mode, with new batteries
- **Footage Counter:** Counts exposed footage. Automatically resets when cartridge is removed.
- **Frame Counter:** 72 frames in one rotation (1 ft.); 2 frames per scale mark; with adjustable indication mark
- **Battery Check:** check button and check window
- **Handgrip:** folding type, containing battery chamber
- **Sockets:** for remote control, and for electronic flash synchronized for single-frame shooting
- **Remote Control:** possible with Remote Switch 60 or Remote Switch 3
- **Switch Dial:** safety switch, with running lock
- **Safety Devices:** over/under exposure warning marks; shutter lock; shutter-angle indicator; film transport indicator
- **Macro-Shooting System:** close-up shooting mechanism works by switching the zooming ring; when the distance scale is set at infinity, it is possible to shoot 189mm (7⁷/₁₆"') from the film plane indicator and 10mm (3⁸/₁₆"') from the front lens surface
- **Interval Shooting:** possible by using the Interval Timer E for single-frame interval shooting
- **Self-Timer:** 10 seconds shooting after 10 seconds delay by attaching Self-Time E
- **Size:** 93.5x277x121mm (3¹¹/₁₆"'x10¹⁵/₁₆"'x4³/₄"')
- **Weight:** 1,990g (4 lb. 6 oz.) with batteries

ACCESSORIES

CODE NO.	DESCRIPTION
5-43233-00	C-8 Close Up Lens 58mm 450
5-43242-00	C-8 Close Up Lens 58mm 240
5-39241-00	Self Timer E
5-39211-00	Interval Timer E
5-22041-01	Remote Switch 3
5-22051-00	Remote Switch 60
5-39111-00	Chest Pod
4-20601-20	Copystand 4
33-8621	Socket Cover for Filter Cancellation Adaptor for AZ1014E
33-8804	Filter Cancellation Adaptor for AZ1014E
5-81071-00	Extension Cord E1000
4-46006-01	Lens Hood S-60 in Case
4-60921-01	Carrying Case for AZ1014 Electronic
49-1002	Lens Cap 60mm (metal) for AZ1014E
5-61151-00	Neck Strap 8 with pad
C41-5507-211	PS-1000 Cine Projector
C58-5351-211	Wireless Controller LC-1 Set including LC-1 Transmitter and LC-1 Receiver (for 1014E, 814XL, 514XL-S, 312XL-S)
C58-5351-001	LC-1 Transmitter
C58-5352	LC-1 Receiver

PLEASE NOTE: For further information on Canon Super-8 accessories, please refer to the last page in this section.