


CODE NO. ITEM
4-10486-21 Canon Cine Projector S-400

Canon S-400

CINE PROJECTOR

DISCONTINUED PRODUCT
Please retain this section for reference purposes.

The Proper Match for a Canon Super 8

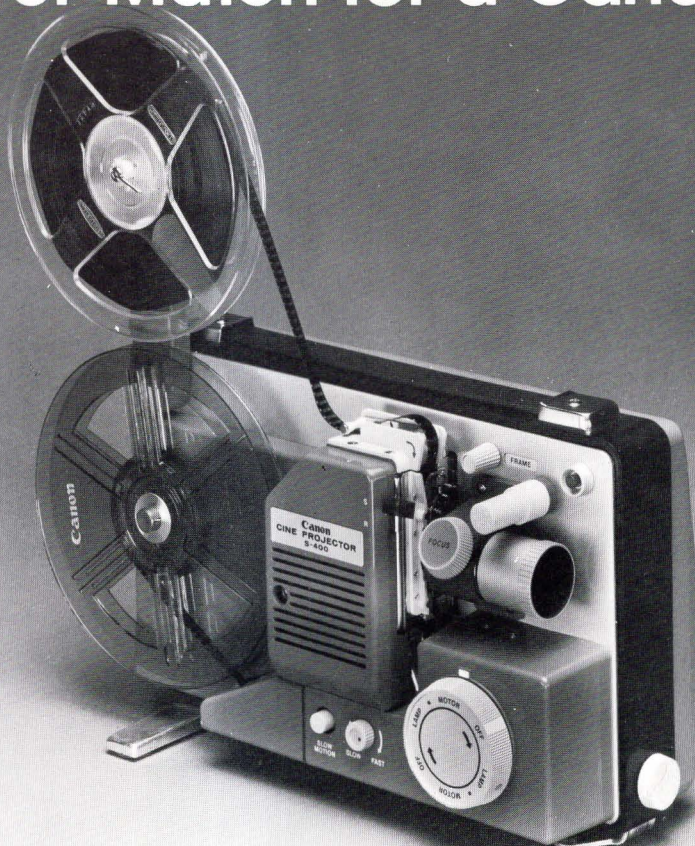

- **Acceptable Film:** Super 8, Single 8 (4x5.4mm) film and regular 8mm (3.3x4.4mm) film by adjusting the film selector
- **Loading Mechanism:** automatic loading by placing film into the film inserting slot
- **Reel Capacity:** 400 feet at one loading
- **Rewinding Mechanism:** automatic quick rewinding activated by punched end of film; quick rewinding possible by pushing rewind button; rewinding time: 57 sec. at full speed
- **Lens:** Canon zoom lens PS 17-28mm f/1.3
- **Pilot Lamp:** 0.2A 8-12V lamp; lights when rotary switch is at "OFF" and "MOTOR"
- **Motor:** DC shunt motor with built-in AC converter; with cooling fan
- **Power Source:** AC 100-240V 50-60Hz; designed for use with AC power source only
- **Acceptable Voltage:** adjustable to 100, 115, 125, 160, 200, 220 or 240V by means of a built-in transformer
- **Projection Lamp:** 8V, 50W with a built-in reflector mirror; Philips type
- **Projection Speeds:** adjustable from 10 to 20 fps, for normal projection, and 8 to 10 fps for slow-motion projection
- **Electric Cord:** 3m (6-6 $\frac{3}{4}$ '')
- **Film Cutter and End Mark Puncher:** for splicing film and for automatic rewinding
- **Projection Screen:** 162x120mm (6 $\frac{3}{8}$ ''x4 $\frac{3}{4}$ '') screen built into the cover
- **Power Consumption:** 110w
- **Size:** 333x210x155mm (11 $\frac{1}{8}$ ''x8 $\frac{1}{4}$ ''x6 $\frac{1}{8}$ '')
- **Weight:** 5kg (11 lbs.)