


CODE NO.
1-32011-21

ITEM
Canon Datematic w/lens 40mm
f2.8 in case

Canon DATEMATIC



The camera that won't forget!

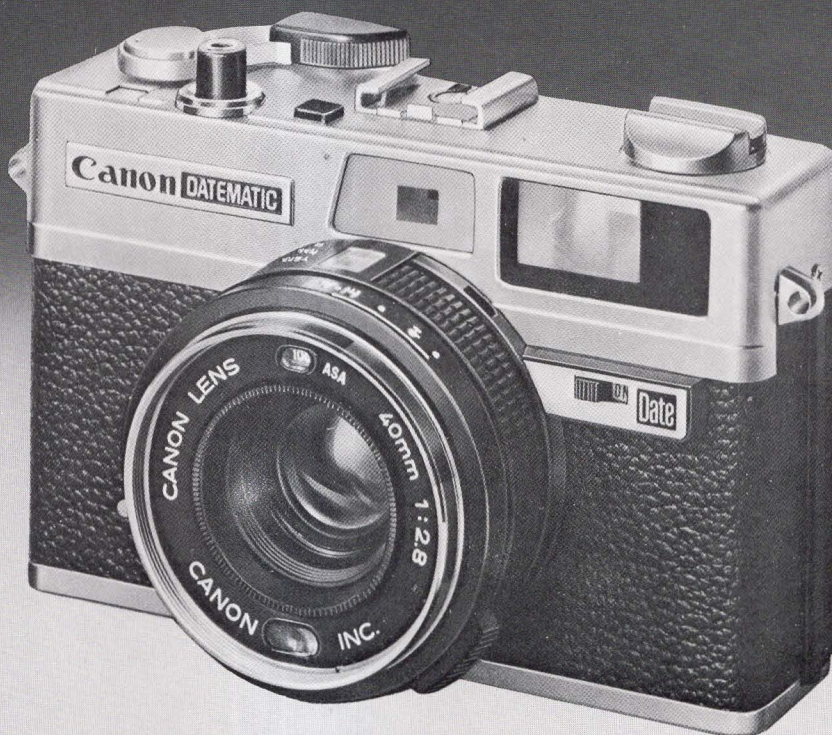

SPECIFICATIONS

- **Lens:** Canon lens 40mm f 2.8, with 5 elements in 4 groups
- **Focusing:** Superimposed image rangefinder
- **Distance Scale:** 0.8, 1, 1.5, 2, 5m. and ∞ on bottom of lens barrel.
Zone focusing marks on top
- **Shutter:** Programmed electronic shutter
- **Automatic Exposure Range:** EV1-17 with ASA 100 film
- **Film Speed Scale:** ASA 25-400
- **Filter Compensation:** Automatic
- **Automatic Flash Mechanism:** With the Canolite ED attached, the focused distance is coupled to the automatic exposure mechanism when the camera is set to "A". Guide numbers can be set for automatic flash operation when using ordinary flash units
- **Guide Number Scale:** 14, 20, 28 (ASA 100 in meters). Do not use in-between settings
- **Flash Synchronization:** X synchronization
- **Viewfinder:** With parallax correction mark, field of view frame, date imprinting mark, rangefinder, combination battery check/camera shake warning light
- **Film Winding:** Single stroke 132°. Stand-off 30°
- **Film Loading:** Multi-slot take-up spool
- **Back Cover:** Open pulling up the film rewind knob
- **Frame Counter:** S, 0-37. Automatically reset to "S" when the back cover is opened
- **Flash Shoe:** Built-in. With direct synchronization contact
- **Date Imprinting Mechanism:** Built-in. Date to be imprinted is set with the dials on lens barrel
- **Date Indications:** Year-74~83; 0~9, □ (blank space)
Month-0~12, □ (blank space)
Day-0~31, □ (blank space)
- **Dimensions:** 118x75x59.5mm (4-5/8"x2-15/16"x2-5/16")
- **Weight:** 440g. (15.5 ozs.)

ACCESSORIES

CODE NO.	DESCRIPTION
5-00291-20	Canolite ED
5-63061-00	Release 30
5-63062-00	Release 50
5-64017-00	Self Timer 8
5-01341-00	Hot Shoe Adaptor
4-45015-00	Canonet Hood 4
4-60941-01	Eveready Case for Datematic
5-61111-00	Neck Strap 4 with pad

PLEASE NOTE: For further information on Canon Rangefinder accessories, please refer to the last page in this section.