


# Canon

for ENG-Cine Camera Lenses

## COMPACT LIGHT WEIGHT TELECONVERTER

1.5X— $\phi$ 75mm, 1.5X— $\phi$ 80mm, 1.5X— $\phi$ 90mm

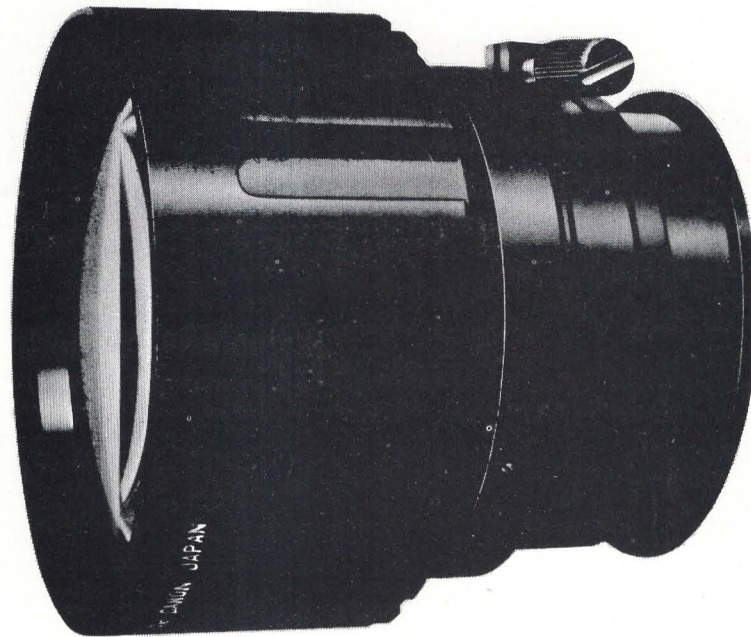

The Canon Teleconverter has been developed as an accessory for Canon ENG-Cine Zoom Lenses.

The Teleconverter can be easily attached to the front ring of each lens, extending the focal distance by 1.5 times. Due to many requests for compact and light weight ENG lenses, feasible focal range of lens with this Teleconverter will be limited on tele-photo side.

### 1. Features:

A. In the feasible focal range, F number of master lens will remain unchanged, which will be an advantage in situations

when filming news where proper lighting is not always available.

B. Teleconverter has three different attachment rings usable with any size of lens specified. Front diameter is 75mm, 80mm, and 90mm.

C. Easy to Attach/Detach.

### 2. Specifications.

Application:	Hand held camera
Magnification:	1.5X
F Number:	No change in feasible focal range
Weight:	Approximately 800g (1.76 lbs.)

### 3. Teleconverter usable with Canon ENG-Cine Camera Lenses:

Teleconverter with 75mm Dia. Attachment Ring	Teleconverter with 80mm Dia. Attachment Ring	Teleconverter with 90mm Dia. Attachment Ring
C10 X 12	C10 X 9.5	J10 X 8.5B2
J10 X 9.5B	J10 X 8.5B	PV10 X 12B2
J10 X 10B	PV10 X 12B	—
C6 X 12.5 (Scoopic)	—	—


### 4. COMPOSITION:

Body w/Attachment Ring . . . . .	1
Lens Cap . . . . .	1
Dust Cap. . . . .	1

### 5. SPEC OF MASTER LENS WITH TELECONVERTER

MODEL		CANON C10 X 12	CANON J10 X 9.5B	CANON C6 X 12.5	CANON PV10 X 12B2
EFFECTIVE RANGE	Usable range of Master lens	44.5—120mm	35.2—95mm	37.5—75mm	50—120mm
	Effective range with converter	66.5—180mm	52.6—142.5mm	56.3—112.3mm	75—180mm
OBJECT DIMENSIONS AT MINIMUM OBJECT DISTANCE (M.O.D.)		17.1 X 23.6 cm at (f = 180mm)	12.4 X 16.5 cm at (f = 142.5mm)	19.1 X 26.3cm at (f = 112.5mm)	5.3 X 7cm at (f = 180mm)
		(M.O.D. = 3.10 m)	(M.O.D. = 1.56m)	(M.O.D. = 1.8m)	(M.O.D. = 0.78m)
		3.10m	3.10m	3.12m	2.52m
1.5m		4.23	4.23	4.25	3.65
2 m		5.35	5.35	5.38	4.78
2.5m		8.73	8.73	8.25	8.15
4 m		10.98	10.98	11.01	10.41
5 m		15.49	15.49	15.51	14.91
7 m		22.24	22.24	22.28	21.67
10 m		44.76	44.76	44.89	44.18
20 m					

### 6. DIMENSIONS

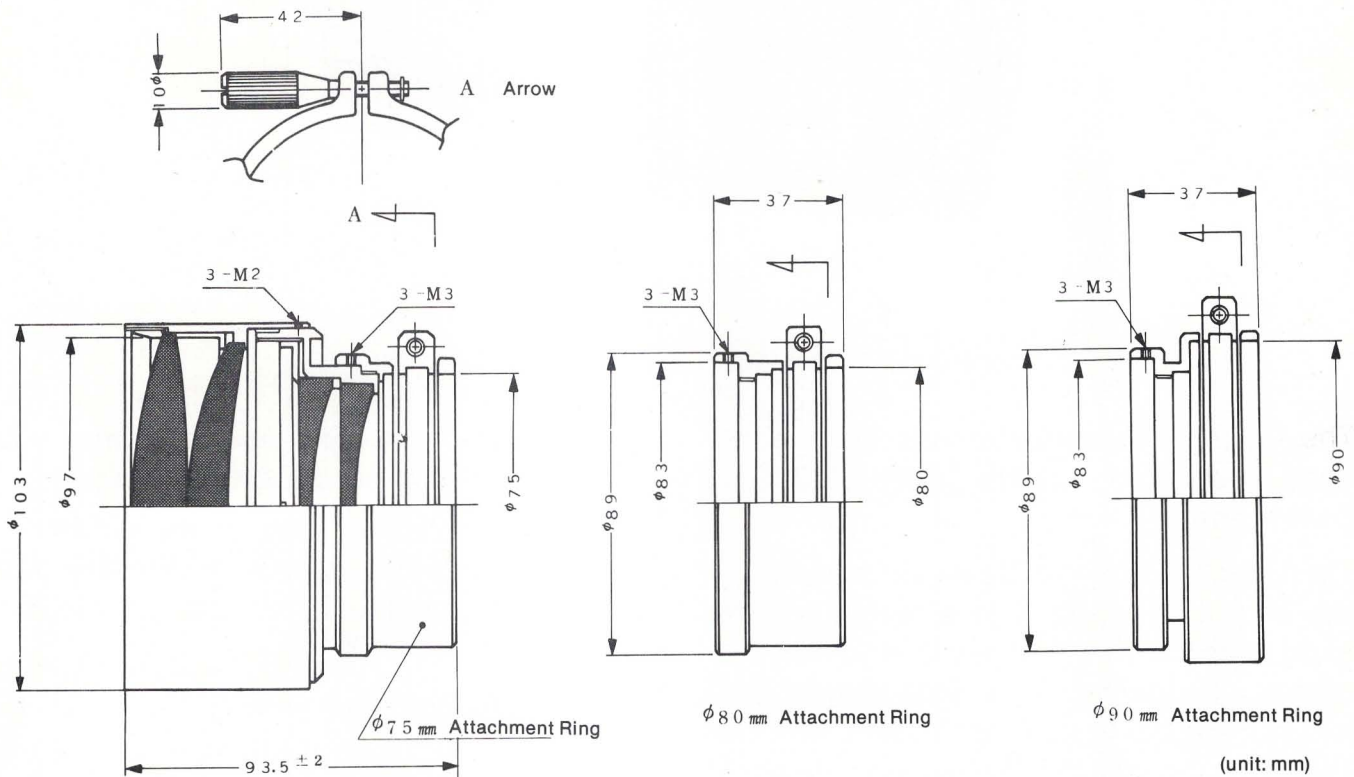

SPEC, COMPOSITION, DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

# Canon

U.S.A. INC.

10 NEVADA DRIVE  
LAKE SUCCESS, NEW YORK 11040  
(516) 488-6700

123 PAULARINO AVENUE EAST  
COSTA MESA, CALIFORNIA 92626  
(714) 979-6000

140 INDUSTRIAL DRIVE  
ELMHURST, ILLINOIS 60126  
(312) 833-3070

CANON O.B.M. CANADA, LTD.  
3245 AMERICAN DRIVE  
MISSISSAUGA, ONTARIO, CANADA  
(416) 678-2730