

Olympus Cameras

15 good reasons to buy a half-frame SLR camera

1) What is *half-frame*? It is a system of photography pioneered by Olympus Optical Co. of Tokyo, Japan which uses standard rolls of 35mm film, but puts two exposures on each 35mm frame. The negative size of 35mm is approximately 1" x 1½". Half frame is 1" x ¾".



20 exposures with full frame 35mm
40 exposures with ½ frame 35mm




36 exposures with full frame 35mm
72 exposures with half frame 35mm

2) Uses standard 35mm film.



3) Let's compare the Pen-FT to one of the finer full frame 35mm cameras. It is much smaller (its compact design eliminates the usual SLR protruding prism.)

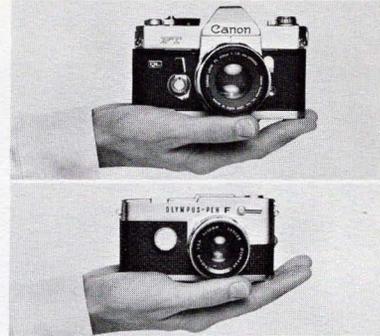


4) Much lighter and easier to handle.

5) When you enlarge a 35mm negative to 8 x 10 or 16 x 20 you have to crop part of it.



But half-frame is closer to the 8 x 10, 16 x 20 proportion (whether horizontal or vertical) and requires little cropping. Therefore, enlargements of half-frame usually require only about 25% more enlargement than full frame.


6) Kodak and other processing labs mount half-frame slides. The cost of processing the film is the same for full or half-




frame. The total cost for processing and mounting of half-frame slides is 33% less than the cost for full frame 35mm.




7) Kodacolor or equivalent color prints come back from processing in the same size (3½" x 5") for half frame and full frame. The cost of the print is the same. It is almost impossible to tell from the color print whether the color negative was half or full frame.

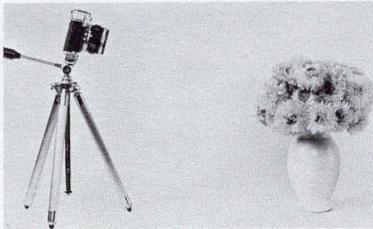

8) Focuses to 14" (with standard lens). Close-up photography without additional equipment. (Full frame 35mm focuses to 24" with standard lens).



9) New Olympus Pen-FT unique through-the-lens metering system. Eliminates the need for setting special dials when changing lenses. The extra large CdS meter measures the light at both *full* aperture or *shooting* aperture.



10) Unique *rotary* titanium focal plane shutter makes it possible to have full synchronization at *all* speeds. This is not possible with most 35mm full frame cameras because of shutter design limitations.




11) The Olympus Pen-FT is part of a complete photographic system with a wide range of accessories. The half-frame format permits smaller and lighter automatic, preset and zoom lenses.

12) The Olympus automatic 50 to 90mm zoom lens is equivalent to a 70 to 130mm zoom lens on a full frame 35.



13) All the latest features in SLR design:

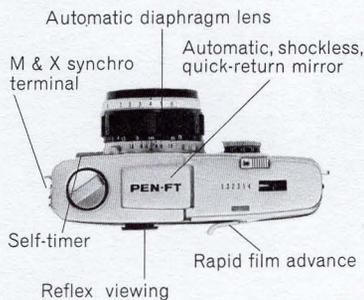

14) The small size, light weight, extreme versatility and wide choice of accessories have made Olympus half-frame SLR a favorite with many famous professional photographers, industrial photographers, advanced amateurs and travelers all over the world.

It is generally recognized by photo authorities that Olympus quality is equal to that found in the finest full frame 35's.

15) The Pen-FT is less expensive to own.



For example, the Canon FT with behind-the-lens meter and f 1.8 lens...\$239.95.




Olympus Pen-FT with behind-the-lens meter and f 1.8 lens...\$159.95.

See the new Pen-FT at your photo dealer or write for folder.

The new Olympus Pen FT

The only half-frame SLR ... now with a unique behind-the-lens metering system

Olympus Pen FT Half Frame 35mm SLR with Through-the-Lens Metering System

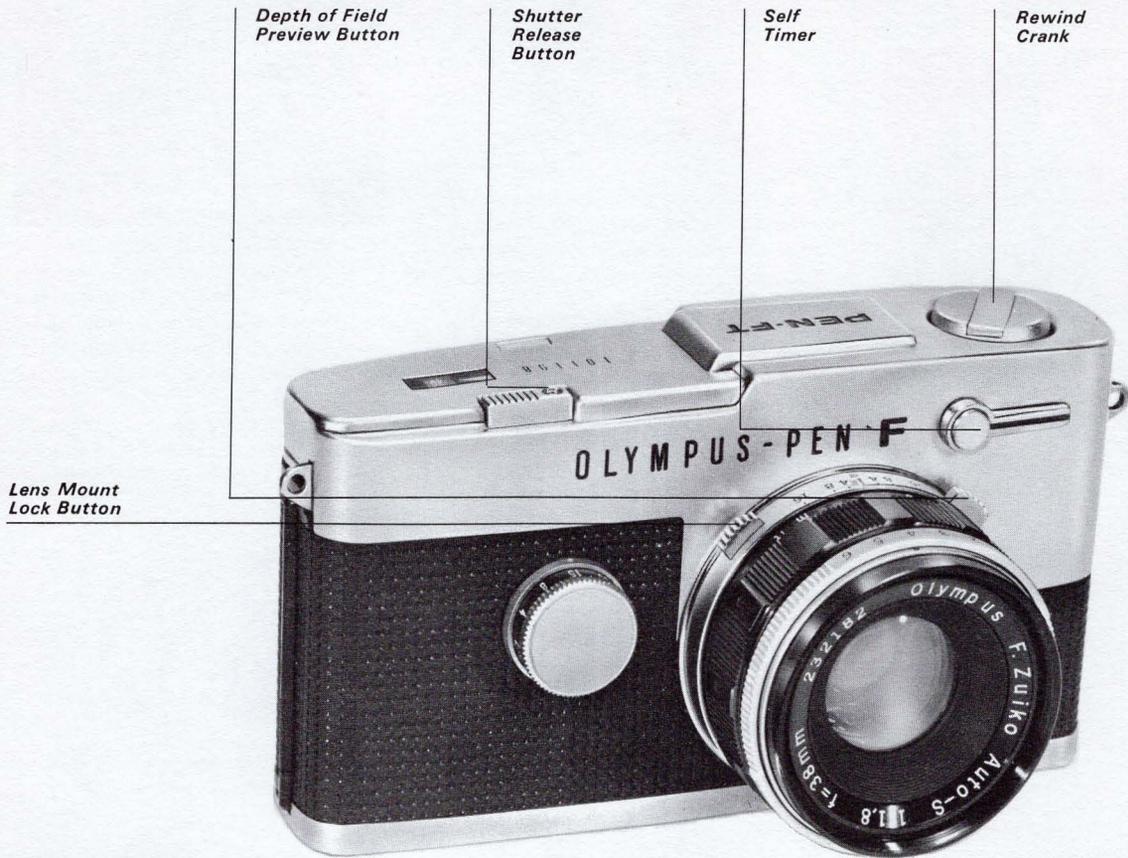

Lens Mount Lock Button

Depth of Field Preview Button


Shutter Release Button

Self Timer

Rewind Crank

Visual Control Center

- [a] Exposure Control Numbers
- [b] Reference Needle
- [c] Micro Diaphragm Focusing Spot




[a] [b] [c]

Shutter Speed Dial



Flash Terminal with Built-in M-X Switch



Specifications

Standard Lenses

38mm f1.8—6 elements in 5 groups, angle of view 43°

40mm f1.4—7 elements in 6 groups, angle of view 41°

42mm f1.2—8 elements in 6 groups, angle of view 39°

Lens Mount Standard Olympus Pen F bayonet type.

Lens Accessory Sizes 43mm threaded accessories fit 38mm f1.8 and 40mm f1.4 lenses; 49mm threaded accessories fit the 42mm f1.2 lens.

Shutter Rotary focal plane. Speeds from 1 to 1/500 sec. and B, with self-timer.

Exposure Control Through-the-lens CdS meter coupled to shutter speed and aperture. Averaging system of exposure measurement. Reading can be taken at either "open" aperture or "stop down" aperture. ASA range 25 to 400.

Battery 1.35 volt Mercury; Eveready PX 625 or equivalent.

Reflex Mirror Instant return, horizontally operated.

Flash Synchronization Full synchronization from 1 to 1/500 sec.; Standard PC receptacle with M-X switch built-in.

Film Advance Single stroke, thumb operated lever cocks shutter and advances film and counter.

Exposure Counter Numerical sequence. Automatically resets at S (Start) when film compartment door is opened.

Dimensions 5 in. wide x 2 1/4 in. high x 2 1/2 in. deep with 38mm f1.8 lens.


Weight 21 ounces with 38mm f1.8 lens.

Stock No.

Olympus Pen FT		
With automatic 38mm f1.8 lens	18-1181*	159.95
With automatic 40mm f1.4 lens	18-1147*	179.95
With automatic 42mm f1.2 lens	18-1125*	219.95
Body only (without lens)	18-1000	129.95
Soft Leather Eveready Case	*	10.00
Soft Leather Eveready Case (Replacement)	18-5008	10.00
Body Cap	18-8010	1.95
Flash Gun Accessory Shoe	18-8032	2.50
Replacement Mercury Meter Battery (No. PX 625)	79-2035	.85
Rear Lens Cap	18-8043	1.75
Replacement Lens Cap for f1.8 & f1.4 lens	18-8021	1.75
Replacement Lens Cap for f1.2 lens	18-8076	1.75

*Stock number for camera and case combination—
Camera sold complete with case only.

Olympus Pen FV Half Frame 35mm SLR

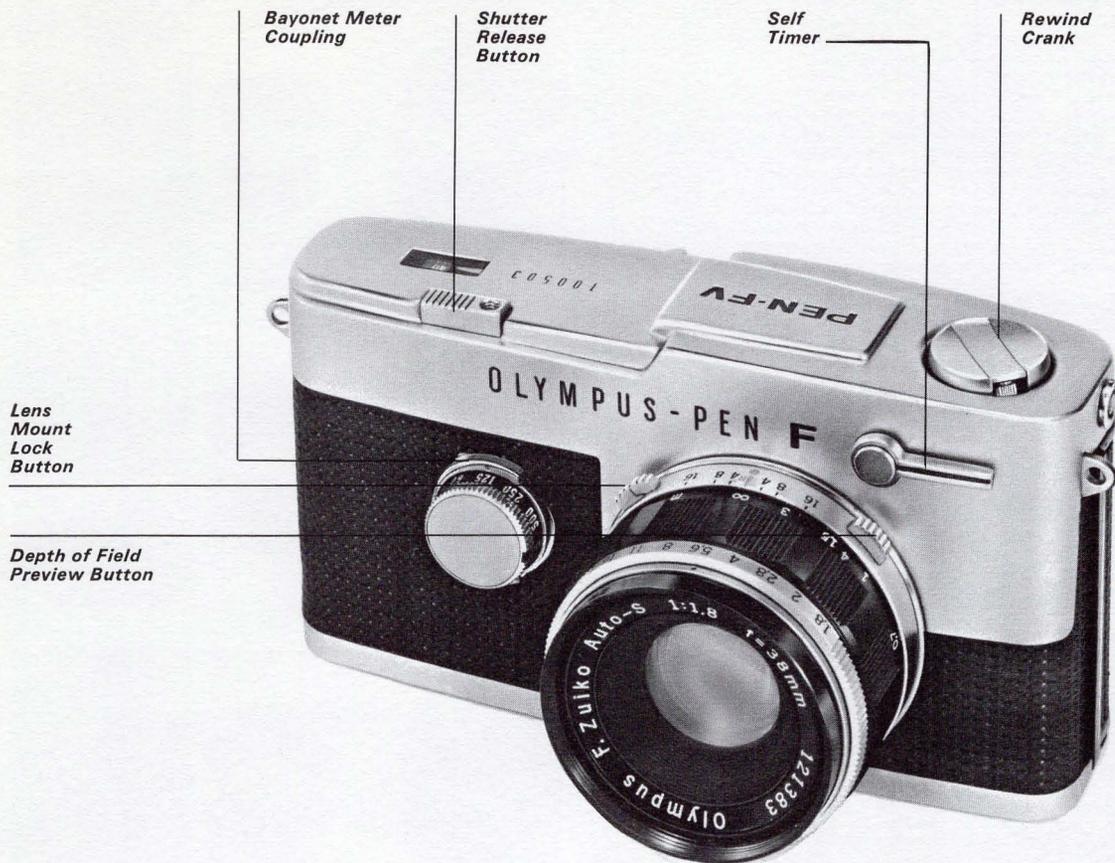

*The Olympus Pen FV is identical in Design to the Olympus Pen FT
but without the Thru-the-Lens Meter.*

Specifications

Standard Lenses

38mm f1.8—6 elements in 5 groups, angle of view 43°

Lens Mount Standard Olympus Pen F bayonet type.

Lens Accessory Sizes 43mm threaded accessories fit 38mm f1.8 and 40mm f1.4 lenses; 49mm threaded accessories fit the 42mm f1.2 lens.

Shutter Rotary focal plane. Speeds from 1 to 1/500 sec. and B, with self-timer.

Exposure Control Accessory CdS exposure meter couples to shutter speed dial by means of a bayonet.

Battery 1.35 volt Mercury; Eveready PX 625 orequivalent.

Reflex Mirror Instant return, horizontally mounted.

Flash Synchronization Full synchronization from 1 to 1/500 sec.; Standard PC receptacle with M-X synchronization.

Film Advance Single stroke, thumb operated lever cocks shutter and advances film and counter.

Exposure Counter Numerical sequence. Automatically resets at S (Start) when film compartment door is opened.

Dimensions 5 in. wide x 2½ in. high x 2½ in. deep with standard 38mm f1.8 lens.

Weight 21 ounces with standard 38mm f1.8 lens.

Stock No.

Olympus Pen FV Camera		
With automatic 38mm f1.8 Lens	18-1583*	139.95
Body only (without lens)	18-1505	99.95
Soft Leather Eveready Case	*	10.00
Soft Leather Eveready Case (Replacement)	18-5008	10.00
CdS Coupling Meter for Olympus Pen FV Camera	18-8065	24.95
Replacement Mercury Meter Battery (No. PX 625)	79-2035	.85
Flash Gun Accessory Shoe	18-8032	2.50
Body Cap	18-8010	1.95
Rear Lens Cap	18-8043	1.75
Replacement Lens Cap	18-8021	1.75

*Stock number for camera and case combination—
Camera sold complete with case only.


Olympus Automatic and Preset Lenses for Pen F, FT & FV

Olympus offers a complete line of high quality interchangeable lenses for the Pen F, FT, and FV cameras. All Olympus lenses are designed, manufactured and tested to meet the rigid standards established for the entire Olympus Pen F system of photography.

Olympus Pen F interchangeable lenses are designed in keeping with the concept of lightness of weight, compactness of size and reliability in operation that characterizes all the components of the Olympus Pen F system.

All Olympus Pen F lenses are calibrated in both conventional f/stops and the unique Olympus through-the-lens numbering system. The through-the-lens numbers are relative aperture values based upon "open aperture" light measurement as used in the operation of the FT metering system. The incorporation of the conventional f/stop calibrations insure the workability of the Olympus interchangeable lenses with conventional light metering systems such as that employed on the Pen FV camera, or with a hand-held meter.


Normal 38mm f1.8 F Zuiko Auto S

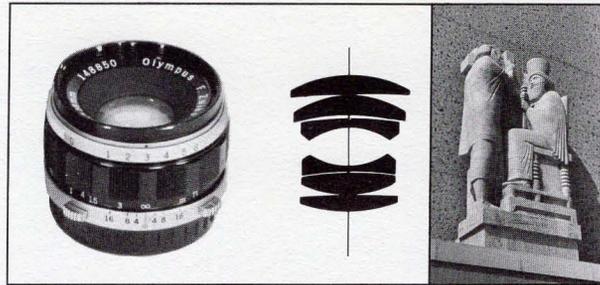

Wide Angle 20mm f3.5 G Zuiko Auto W




40mm f1.4 G Zuiko Auto S

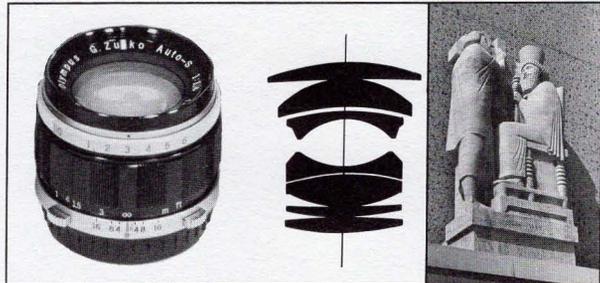

25mm f4.0 E Zuiko Auto W



42mm f1.2 H Zuiko Auto S

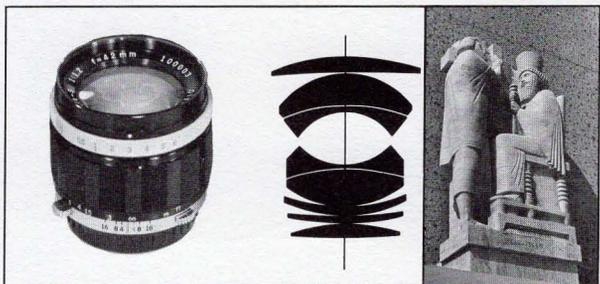

25mm f2.8 G Zuiko Auto W



Intermediate Telephoto 60mm f1.5 G Zuiko Auto T



Wide Angle

20mm f3.5 G Zuiko Auto W*

7 elements in 6 groups: 73° angle of view. Minimum focus: 8 in. (Equivalent focal length for 35mm: 28mm.) Accessory size: 43mm screw in.

25mm f4.0 E Zuiko Auto W*

5 elements in 5 groups: 62° angle of view. Minimum focus: 10 in. (Equivalent focal length for 35mm: 35mm.) Accessory size: 43mm screw in.

25mm f2.8 G Zuiko Auto W*

7 elements in 5 groups: 62° angle of view. Minimum focus: 10 in. (Equivalent focal length for 35mm: 35mm.) Accessory size: 43mm screw in.

Stock No.

18-9109 89.95

18-9110 79.95

18-9121 99.95

Normal

38mm f1.8 F Zuiko Auto S

6 elements in 5 groups: 43° angle of view. Minimum focus: 14 in. (Equivalent focal length for 35mm: 55mm.) Accessory size: 43mm screw in.

40mm f1.4 G Zuiko Auto S

7 elements in 6 groups: 41° angle of view. Minimum focus: 14 in. (Equivalent focal length for 35mm: 58mm.) Accessory size: 43mm screw in.

42mm f1.2 H Zuiko Auto S

8 elements in 6 groups: 39° angle of view. Minimum focus: 14 in. (Equivalent focal length for 35mm: 60mm.) Accessory size: 49mm screw in.

Intermediate Telephoto

60mm f1.5 G Zuiko Auto T**

7 elements in 5 groups: 28° angle of view. Minimum focus: 2 ft. 7 in. (Equivalent focal length for 35mm: 85mm.) Accessory size: 49mm screw in.

Stock No.

18-9006 39.95

18-9017 69.95

18-9028 99.95


18-9202 99.95

*w/Leather Case


**w/Leather Case and Hood

Olympus Automatic and Preset Lenses for Pen F, FT & FV


Telephoto 70mm f2.0 F Zuiko Auto T

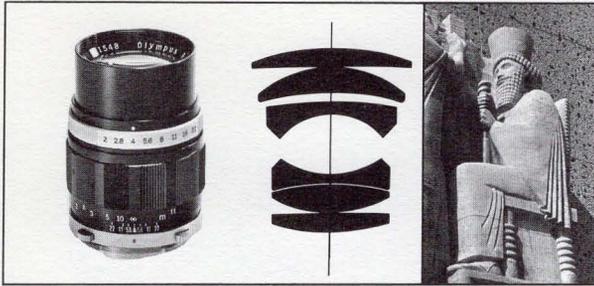


400mm f6.3 E Zuiko T

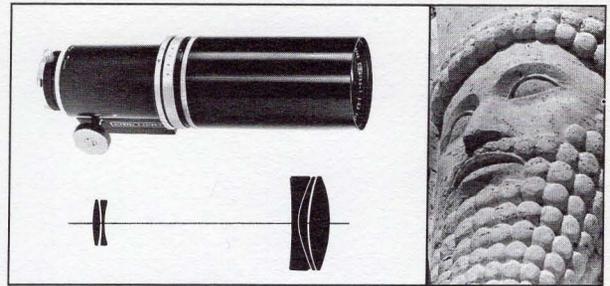


100mm f3.5 E Zuiko Auto T

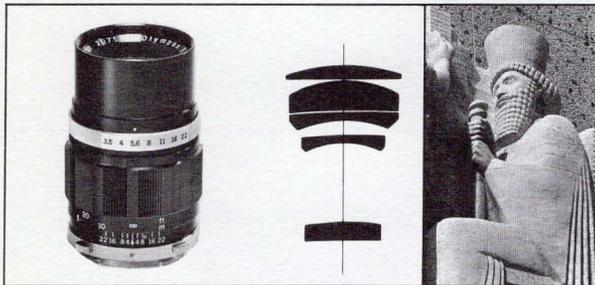


800mm f8.0 Zuiko Mirror T

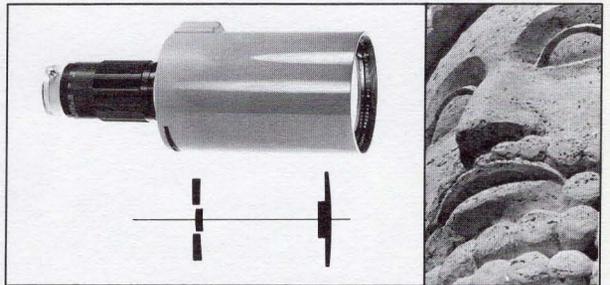


150mm f4.0 E Zuiko Auto T

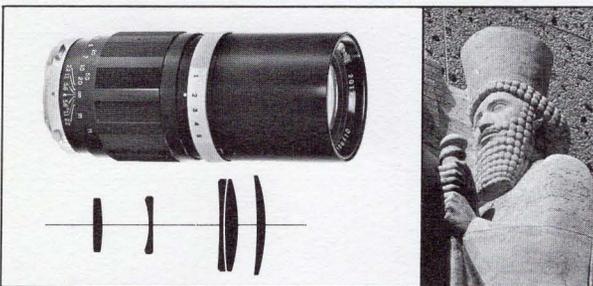


Zoom Telephoto 50-90mm f3.5 Zuiko Auto Zoom

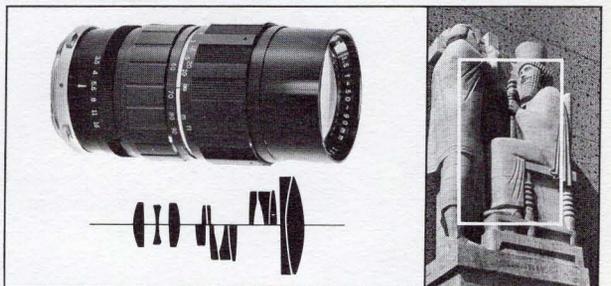

250mm f5.0 E Zuiko T

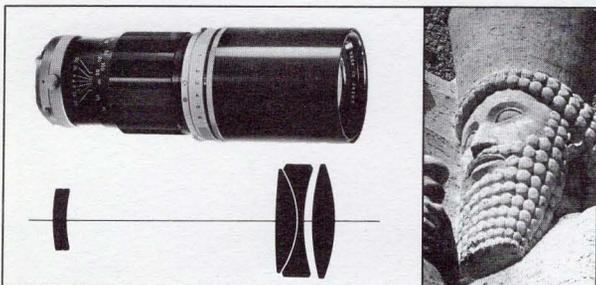

100-200mm f5.0 Zuiko Preset Zoom

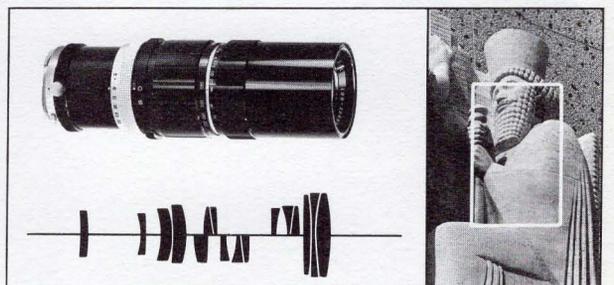

Telephoto

70mm f2.0 F Zuiko Auto T**
6 elements in 5 groups: 24° angle of view.
Minimum focus: 2 ft. 7 in. (Equivalent focal length for 35mm: 100mm.) Accessory size: 43mm screw in.

Stock No.
18-9213 **89.95**

100mm f3.5 E Zuiko Auto T** 18-9224 **99.95**
5 elements in 4 groups: 17° angle of view.
Minimum focus: 5 ft. (Equivalent focal length for 35mm: 143mm.) Accessory size: 43mm screw in.

150mm f4.0 E Zuiko Auto T** 18-9235 **119.95**
5 elements in 4 groups: 12° angle of view.
Minimum focus: 5 ft. 7 in. (Equivalent focal length for 35mm: 210mm.) Accessory size: 49mm screw in.

250mm f5.0 E Zuiko T** 18-9257 **219.95**
5 elements in 3 groups: 7° angle of view.
Minimum focus: 13 ft. 6 in. (Equivalent focal length for 35mm: 360mm.) Accessory size: 58mm screw in.

400mm f6.3 E Zuiko T**
5 elements in 4 groups: 4° angle of view.
Minimum focus: 16 ft. 5 in. (Equivalent focal length for 35mm: 580mm.) Accessory size: 72mm screw in.

Stock No.
18-9268 **399.95**

800mm f8.0 Zuiko Mirror T** 18-9246 **985.00**
5 elements in 4 groups: 2° angle of view.
Minimum focus: 48 ft. 6 in. (Equivalent focal length for 35mm: 1150mm.) Accessory size: 25.5mm (rear mounted).


Zoom Telephoto
50-90mm f3.5 Zuiko Auto Zoom** 18-9305 **159.95**
10 elements in 8 groups: 34° to 19° angle of view. Minimum focus: 5 ft. (Equivalent focal length for 35mm: 70 to 130mm.) Accessory size: 49mm screw-in.

100-200mm f5.0 Zuiko Preset Zoom** 18-9316 **199.95**
12 elements in 9 groups: 17° to 9° angle of view. Minimum focus: 5 ft. 7 in. Equivalent focal length for 35mm: 143 to 286mm. Accessory size: 49mm screw-in.

**w/Leather Case and Hood

Olympus Pen F, FT, FV Accessories


- (a) Right Angle Magnifier w/Eye Shade (c) Slide Copier
 (b) Bellows (d) Camera Slider

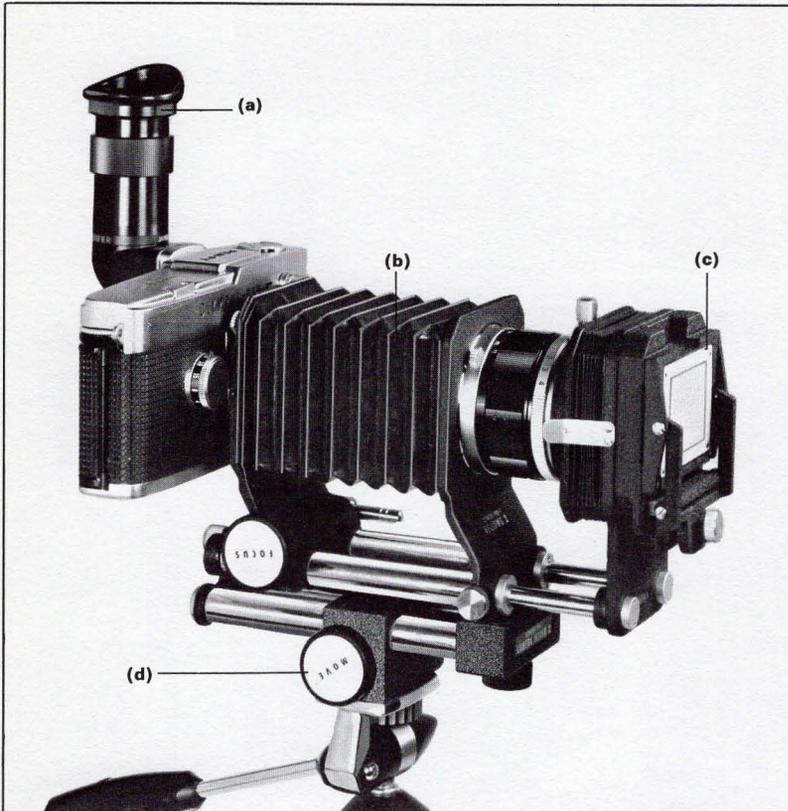

Reverse Ring



Magnifier

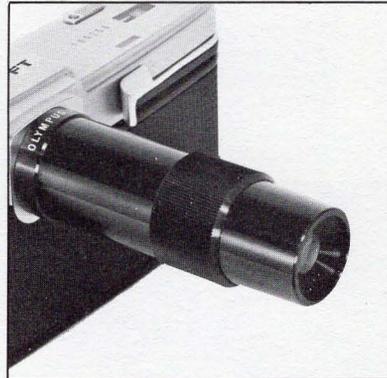


Right Angle Finder



CdS Coupling Meter



Eye Correction Lens Adapter

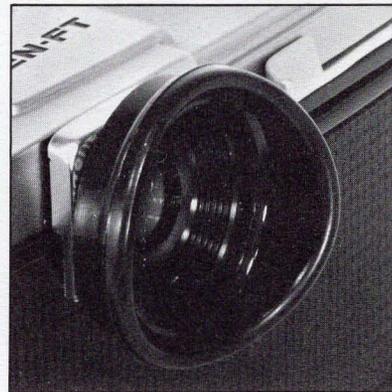

Right Angle Magnifier with Eye Shade

Attaches to viewfinder eyepiece as an aid when copying or when photographing objects close to the ground. Magnifies image for critical focusing and permits the photographing of a subject at right angles to the direction of view.

Bellows 2 Double track with rack and pinion. Rear of bellows fits directly to camera body while front accepts camera lens. Extension range from a minimum of 26.6mm to a maximum of 98.8mm. Camera body may be rotated up to 90 degrees while mounted on bellows.

Slide Copier 2 Designed for use with bellows attachment for duplicating from full frame or half frame slides or other transparent objects in color or black and white.

Camera Slider 2 Dual Track. Provides maximum stability while extending the flexibility of the bellows attachment. Allows camera to be moved without moving the tripod.

Stock No.

18-8249 24.95

18-8113 29.95

18-8157 19.95

18-8135 17.95

Reverse Ring 2

Allows reversing of camera lens for close-up photography. Two-piece construction with bayonets for both front and rear of lens. May be used with slide copier, or other lens accessories. Accepts filters.

Magnifier Attaches to viewfinder eyepiece. Provides magnified view of subject, and enhances the accuracy of focusing, particularly in close-up and copy work.

Eye Correction Lens Adapter Attaches to viewfinder eyepiece for holding diopter correction lens. May be used without correction lens. Also acts as an eye shade.

CdS Coupling Meter Couples to shutter speed dial on Pen F and Pen FV cameras.

Right Angle Finder Convenient accessory for use with camera and copy stand, or for photographing objects at ground level. Permits the photographing of a subject at right angles to the direction of view.

Stock No.

18-8179 13.95

18-8205 14.95


18-8261 3.25

18-8065 24.95


18-8227 24.95

Olympus Pen F, FT, FV Accessories

Pen Up 3 Copy Stand

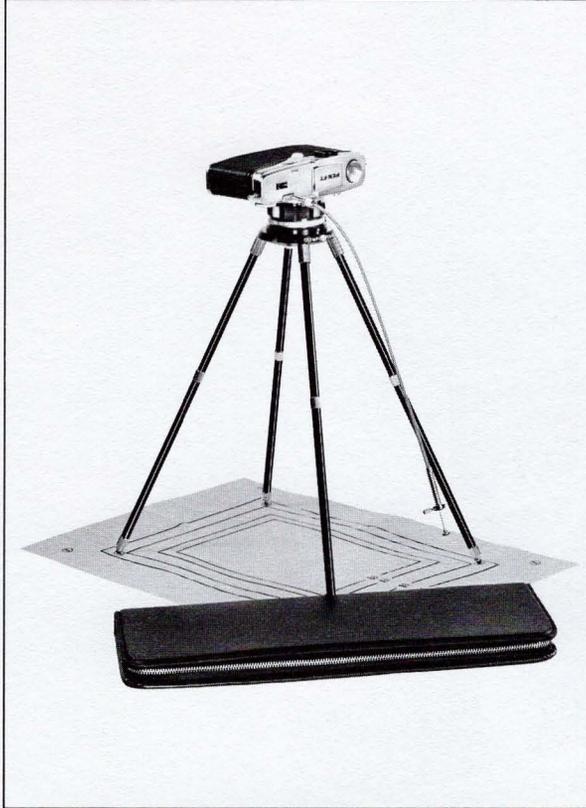

(a) *Pen F Copy Stand*
(b) *Olympus Lighting Set*

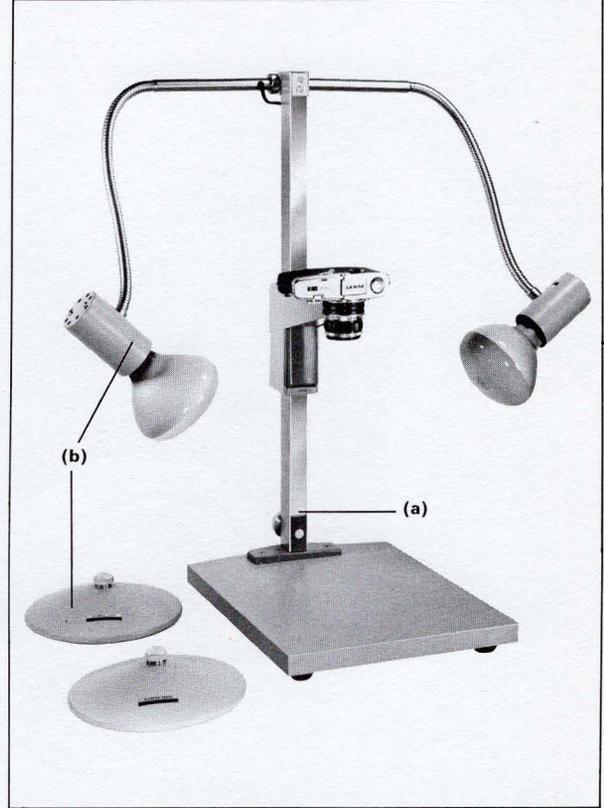

Lens Mount Adapters Nikon, Pentax, Exakta, Leica



Set Case



Pen Up 3 Copy Stand Portable copy unit, complete with leather case.

Lens Mount Adapter To adapt other prime camera lenses for use on Olympus Pen F series cameras. Available for Pentax-Mamiya/Sekor, Exakta, Nikon, and Leica lenses. Note: Leica lenses may be used for close-up photography only.

Mamiya/Sekor, Pentax Lens Mount Adapter	18-8308	12.95
Nikon Lens Mount Adapter	18-8319	12.95
Exakta Lens Mount Adapter	18-8320	12.95
Leica Lens Mount Adapter	18-8331	12.95
Vivitar Compatible "T" Mount Adapter (TA-12) (for use with "T" mount lenses on Olympus Pen F Series Cameras)	20-9120	7.50
Microscope Adapter (not illustrated)	18-8180	14.95

Stock No.
18-8766 **22.95**

Extension Ring Set Four-piece set. May be used with any Pen F series lens except the zoom lenses. For close-up photography. (Not illustrated)

Pen F Copy Stand Heavy duty copy stand complete with baseboard, vertical column, and adjustable camera platform.

Olympus Lighting Set Designed for Olympus Pen F copy stand. Two units in a set. Complete with weighted base units for holding lights when detached from copy stand.

Set Case Convenient compartment case designed to hold the camera fitted with one lens. There is also room for a wide angle or standard lens in addition to film and small accessories.


Stock No.
18-8168 **19.95**

18-8700 **85.00**

18-8711 **37.00**

18-5307 **19.95**

Olympus Pen EED Half Frame 35mm

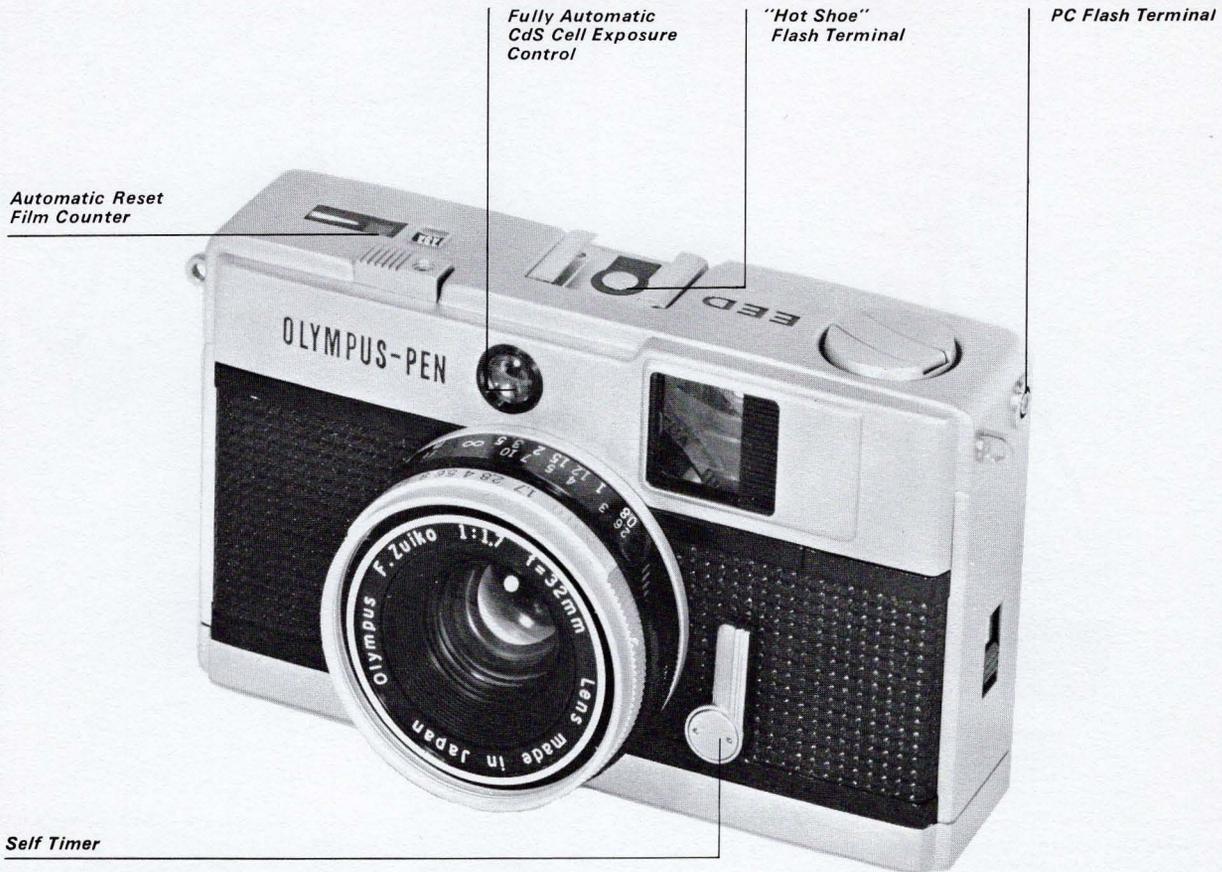

**Compact • Light Weight • Automatic Electric Eye Exposure Control •
Shutter will not release when light is inadequate for correct exposure •**

6 Element Ultra Fast f1.7 lens

Specifications

Lens

32mm fl. 7 F Zuiko; 6 elements in 4 groups; aperture range fl. 7 to f22; zone focus click stop positions to 2.6 feet, 4 feet, and 10 feet.

Lens Accessory Size 43mm screw in

Exposure Control Fully automatic programmed cadmium sulphide (CdS) Electric Eye system sets the correct combination of shutter speed and lens aperture. Shutter speeds: 1/15 sec. to 1/500 sec. Film Speed Range: ASA 12 to ASA 400. Automatic warning signal in viewfinder for incorrect light. Manual override disengages electric eye for flash.

Battery 1.35 volt Mercury; Eveready PX625 or equivalent.

Viewfinder Bright frame type with parallax markings.

Flash Fully synchronized for M, F and X (Electronic flash). Standard PC flash terminal and "hot shoe" located on camera body.

Film Advance Thumb operated film advance roller. Cocks shutter, advances film and exposure counter. Double exposure prevention.

Film Counter Numerical sequence. Automatically resets at S (Start) when film compartment door is opened.

Dimensions 4½" wide x 2¾" high x 2" thick.

Weight 15 ounces

Olympus Pen EED Camera

Complete with pouch case, wrist strap and battery

Replacement Mercury Meter


Battery (No. PX 625)

AG-1 Flash Unit

Stock No.

18-2605	84.95
79-2035	.85
18-8283	6.95

Olympus Pen EES-2 Half Frame 35mm

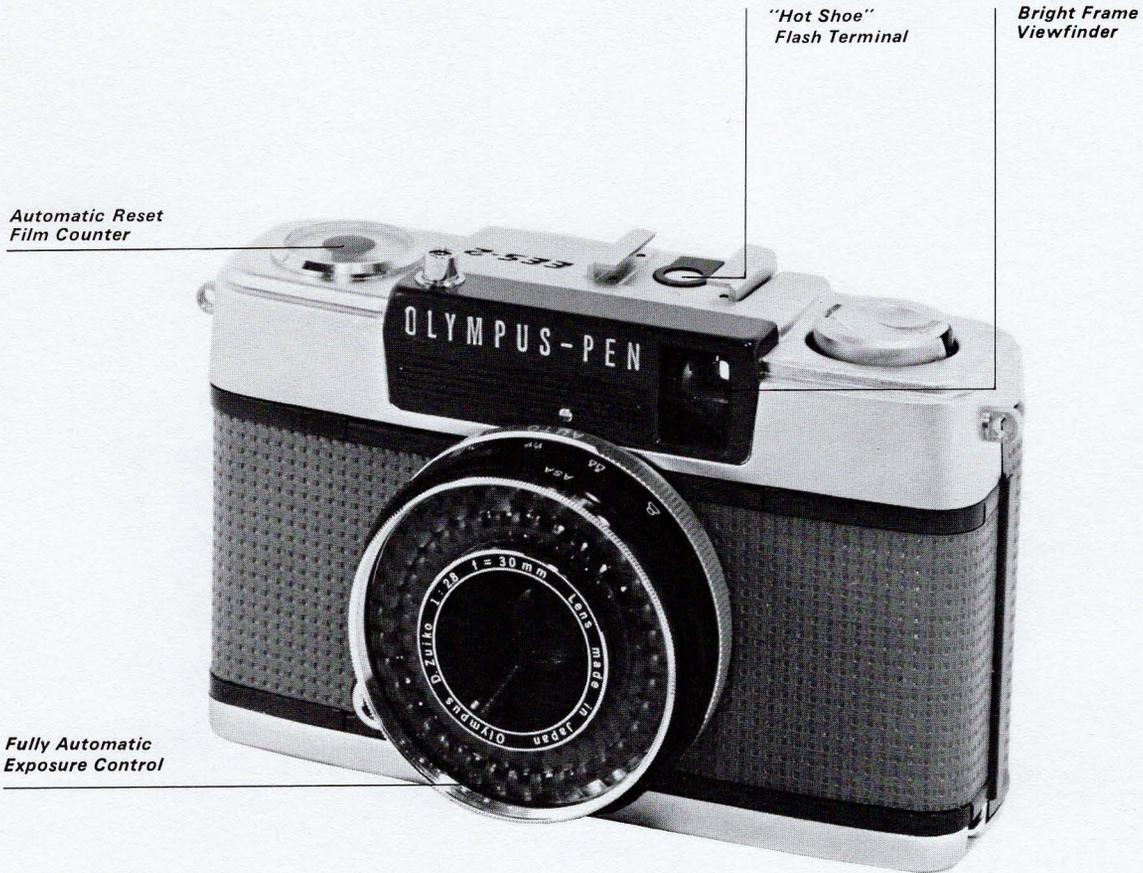

Compact • Light Weight • Automatic Electric Eye Exposure Control •

Shutter will not release when light is inadequate for correct exposure

Specifications

Lens

30mm f2.8 D Zuiko; 4 elements in 3 groups; aperture range f2.8 to f22; zone focus click stop positions of 4 feet, 10 feet, 50 feet, infinity.

Lens Accessory Size 43.5mm screw in

Exposure Control Fully automatic programmed Selenium Cell Electric Eye system sets the correct combination of shutter speed and lens aperture. Shutter speeds 1/30 or 1/250 seconds. Film speed range: ASA 25 to ASA 400. Automatic warning signal in viewfinder for incorrect light. Manual override disengages electric eye.

Viewfinder Bright frame type with parallax markings.

Flash Fully synchronized for M, F and X (electronic flash). Standard PC flash terminal and "hot shoe" located on camera body.

Film Advance Thumb operated film advance roller.

Cocks shutter, advances film and exposure counter. Double exposure prevention.

Film Counter Numerical sequence. Automatically resets at S (Start) when film compartment door is opened.

Dimensions 4¼" wide x 2⅝" high x 2" thick.

Weight 13 ounces.

Olympus Pen EES-2 Camera

Complete with pouch case and wrist strap

AG-1 Flash Unit

Stock No.


18-2568

64.95

18-8283

6.95

Olympus Pen EE-2 Half Frame 35mm

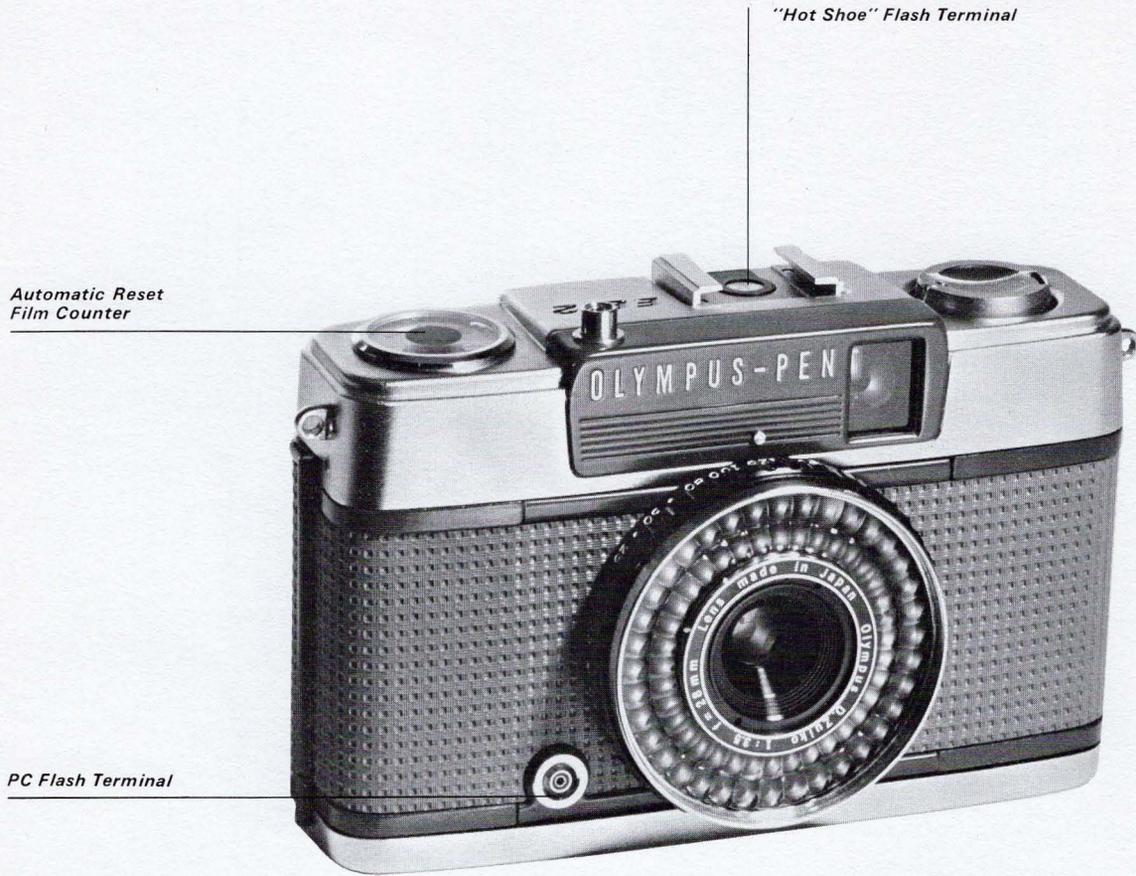

**Compact • Light Weight • Automatic Electric Eye Exposure Control •
Shutter will not release when light is inadequate for correct exposure**

Specifications

Lens

28mm f3.5 D Zuiko; 4 elements in 3 groups; aperture range f3.5 to f22; fixed focus from 4.5 feet to infinity.

Lens Accessory Size

43.5mm screw in
Exposure Control Fully automatic programmed Selenium Cell Electric Eye system sets the correct combination of shutter speed and lens aperture. Shutter speeds: 1/30 sec. or 1/250 sec. Film speed range: ASA 25 to ASA 400. Automatic warning signal in viewfinder for incorrect light. Manual override disengages electric eye for flash.

Viewfinder

Bright frame type.
Flash Fully synchronized for M, F and X (electronic flash). Standard PC flash terminal and "hot shoe" located on camera body.

Film Advance Thumb operated film advance roller. Cocks shutter, advances film, and exposure counter. Double exposure prevention.

Film Counter Numerical sequence. Automatically resets at S (start) when film compartment door is opened.

Dimensions 4½" wide x 2¾" high x 1¾" thick
Weight 12 ounces.

Olympus Pen EE-2 Camera

Complete with pouch case and wrist strap

AG-1 Flash Unit

Stock No.

18-2487

54.95

18-8283


6.95

Olympus Quickmatic EEM Fully Automatic Instant Loading with Electric Film Advance

All Metal
Body Construction


Bright Frame
Viewfinder

Fully Automatic
Exposure Control

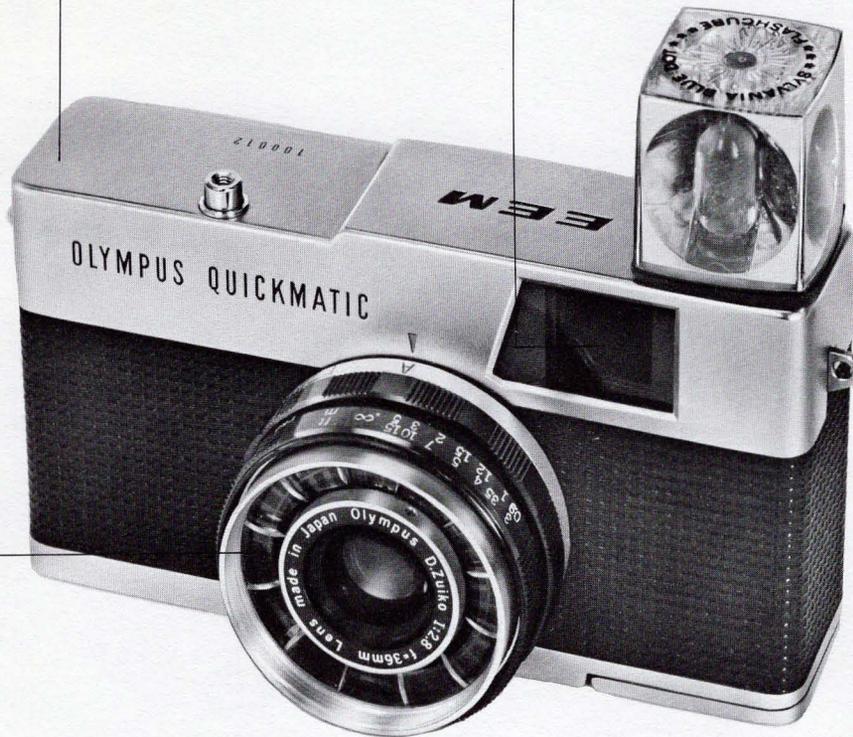


Olympus Quickmatic EEM Gift Kit


Automatic Electric
Film Advance



Automatic Exposure
Control



Instant Loading 126 Film



Specifications

Lens

36mm f2.8 D Zuiko. 4 elements in 3 groups;
minimum focus 3 feet; zone focus click stops.

Lens Accessory Size 43mm screw in

Exposure Control Fully programmed Electric Eye automatically selects both shutter speed and lens aperture. ASA speed automatically sets when cartridge is inserted. Red warning signal indicates when flash should be used. Shutter release locks when light is inadequate for correct exposure.

Viewfinder Bright frame viewfinder incorporates 3 zone focus symbols. Correct focus setting is obtained by rotating focusing ring until correct symbol appears in finder. Parallax marks in viewfinder.

Flash Automatic rotating flash cube plus unique Flashmatic system. Focusing on subject automatically selects correct flash exposure.

Film Advance Electrically powered by 2 penlight batteries. Automatically advances film to next exposure after each picture is taken. Rapid sequence pictures may be taken without interruption.

Other Features Shutter release threaded for standard cable release; accessory strap eyelets; standard tripod socket.

Dimensions 5 in. wide x 2 7/8 in. high x 2 1/2 in. deep.

Weight 18 ounces.

Stock No.

Olympus Quickmatic EEM Camera Gift Kit

Complete with camera, batteries,
flash cube, wrist loop and color film

17-3108

69.50

Olympus Quickmatic EEM Camera

17-3201*

64.50

Hard Leather Eveready Case

*

10.00


Hard Leather Eveready Case (Replacement)

17-5168

10.00

*Stock number for camera and case combination—
camera sold complete with case only.

Olympus Trip 35 Compact Full Frame 35mm Camera with Automatic Exposure Control

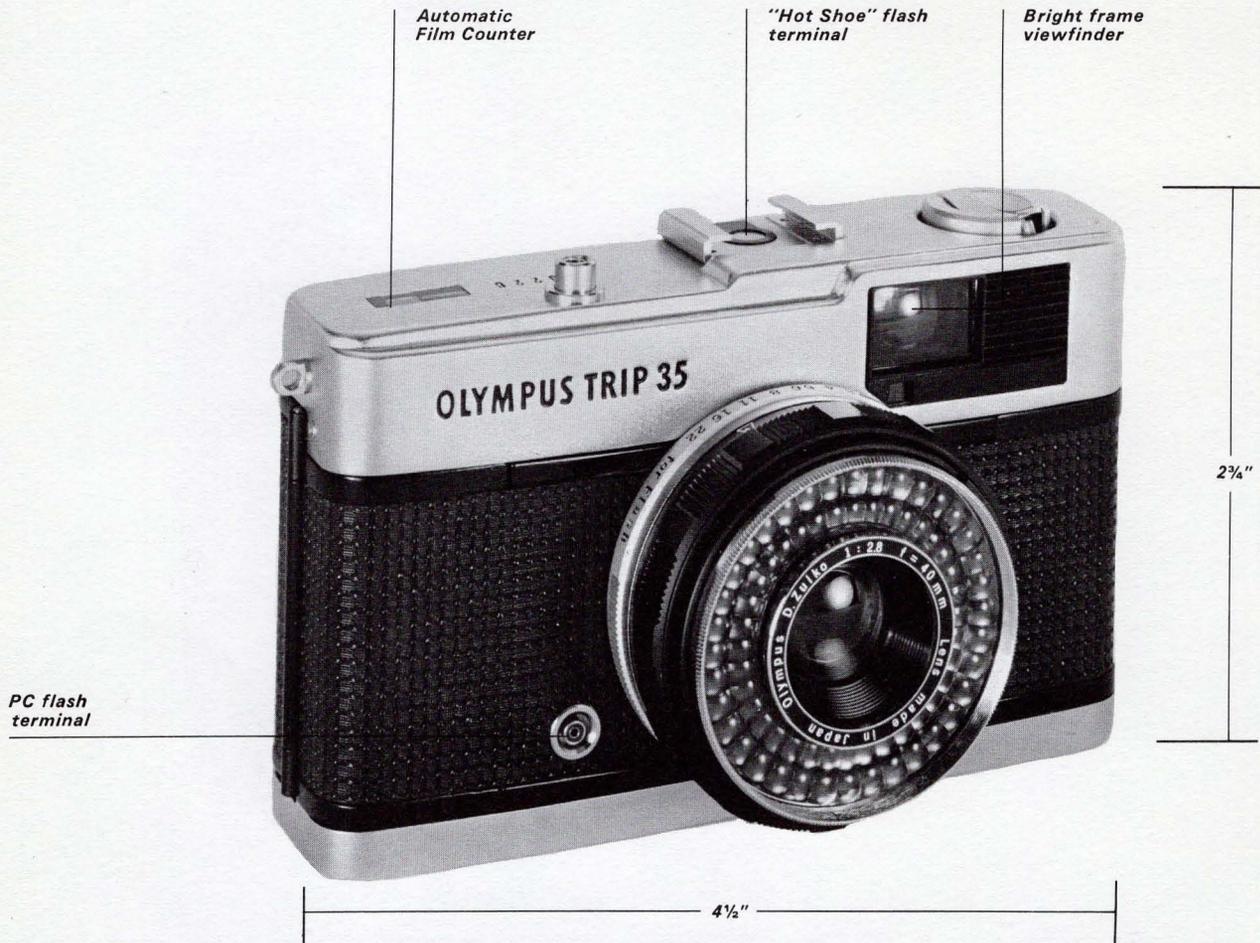

Compact • Light Weight • Automatic Electric Eye Exposure Control •

Shutter will not release when light is inadequate for correct exposure

Specifications

Lens

40mm f2.8 D Zuiko. 4 elements in 3 groups; aperture range f2.8 to f22; zone focus click stop positions of 4 feet, 10 feet, 50 feet, infinity.

Lens Accessory Size

43.5mm screw in. Exposure control Fully programmed Selenium Electric Eye system sets the correct combination of shutter speed and lens aperture. Shutter speeds: 1/40 sec. or 1/200 sec. Film speed range: ASA 25 to ASA 200. Automatic warning signal in viewfinder for incorrect light. Manual override disengages electric eye for flash.

Viewfinder Luminous bright frame type with parallax markings, zone focusing symbols and red warning signal for inadequate light.

Flash "X" synchronization at 1/40 sec. Separate "hot shoe" and PC flash terminals.

Film Advance Thumb-rotated wheel at rear of camera body advances film and exposure counter, cocks shutter. Double exposure prevention.

Other features Numerical sequence exposure counter with automatic reset; shutter release threaded for standard cable release; easy loading take-up spool.

Dimensions 4 1/2 in. wide x 2 3/4 in. high x 2 1/4 in. thick.

Weight 14 1/2 ounces.

Olympus Trip 35 Camera

Complete with pouch case, and wrist strap

Stock No.

18-4207 59.95