

CODE NO.
1-62001-23

ITEM
110ED Kit (includes Canolite ED & extender)

Canon 110ED







The little camera that remembers!



SPECIFICATIONS

- **Lens:** Canon lens 26mm f 2, with 5 elements in 4 groups
- **Focusing:** Rectilinear movement of the lens coupled to the rangefinder
- **Distance Scale:** 0.6, 1, 3, 10m and ∞ with zone focus marks
- **Shutter:** Electric shutter. 8 sec. ~ 1/500 sec.
- **EE Coupling Range:** With ASA 80, EV-1 (f/2, 8 sec.) ~ EV17 (f/16, 1/500 sec.)
- **Film Speed Scale:** ASA 80
- **Automatic Flash Mechanism:** Automatic flash with Canolite ED
- **Viewfinder Information:** Field-of-view frame with parallax correction marks, overexposure warning lamp (right, red), and LED camera shake warning lamp/battery checker (left, yellow). The lamp keeps lighting during long exposure
- **Film Winding:** Single stroke film advance with sliding knob
- **Film Loading:** Cartridge insertion
- **Back Cover Opening:** By sliding knob on body back
- **Protector Cover:** Sliding cover on front body. Shutter button safety lock mechanism
- **Accessory Shoe:** With direct flash contact
- **Date Mechanism:** Date imprinting mechanism. Date is set with switch dials on left side
- **Date Indications:**
 - Year-0 ~ 9, 74 ~ 84, \square (blank space)
 - Month-1 ~ 12, \square
 - Day-1 ~ 31, \square
- **Dimensions and Weight:** 142.2x56x29mm (5-9/16"x2-3/16"x1-1/8") 295g (10½ oz.)

SELLING POINTS

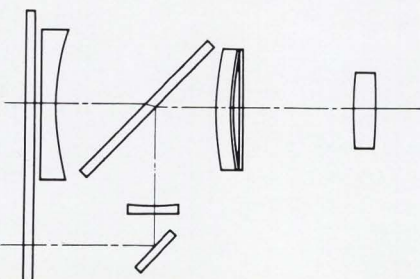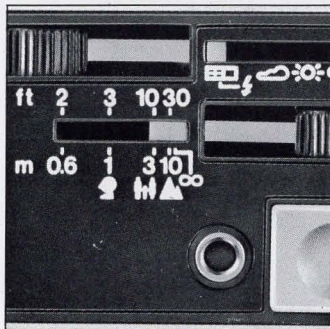

1 Date Imprinting Mechanism

A photographic image may later convey a myriad of facets, and often placement in time by the date recalls the image from your memory in all its vividness. The Canon 110 ED is a pocket size camera that is portable anywhere to provide an image of superb quality with the date recorded on it.

A light emitting diode LED lights to imprint the date immediately after the shutter returns. The year month and day upon which the picture was taken is thus superimposed in the bottom right-hand corner of the photograph. The date display window is on the top of the body at the left side and date setting is easily accomplished by means of the switch dials on the left side. Numerals and dials rotate in the same direction, the day dial rotates 360°. The option of not imprinting the date, since it may not always be necessary is also provided.

2 Perfect daylight exposure with programmed AE

The automatic exposure control system delivers perfect daylight exposure metering by its programmed AE circuitry. All one has to do is set the aperture knob at the mark appropriate to the weather conditions and set the distance scale. The AE mechanism is fully coupled to the film speed, programmed shutter speed and f/stop.

The Canon 110 ED's aperture priority programmed electric shutter has the widest shooting range of all pocket size cameras to accommodate a variety of subjects from dark to light. The range is from EV 1 (8 seconds-f/2) to EV 17 (1/500 of a second-f/16).

3 Complete viewfinder information

The new Canon 110 ED viewfinder has a double superimposing rangefinder so that it is only necessary that the two images coincide in the center of the viewfinder for perfect focus. The bright viewfinder also has parallax correction marks, overexposure and camera shake warning lamps. The camera shake LED also serves as a battery check.




4 Fully automatic flash control assures correctly exposed flash photography

By using the Canolite ED a cordless electronic flash unit, there is no need to calculate guide numbers. Attach it to the top of the camera, set the aperture knob to the $\frac{1}{2}$ mark, and the camera is automatically switched into the fully automatic flash control circuitry. It is this very simple procedure that makes the camera fully operational for either night or indoor photography since the correct f/stop is automatically set according to the $\frac{1}{2}$ mark and the shooting distance.

5 A Bright, Sharp f/2 Lens

The Canon 26mm f/2 lens affords beautiful color reproduction and is the fastest among this class of lenses. Its 5-element 4-component construction assures high resolving power and outstanding ability to capture natural colors for excellent color reproduction. The distinctive sharpness of Canon lenses is world-renown and enables pictures to be enlarged as much as you wish.

NOMENCLATURE

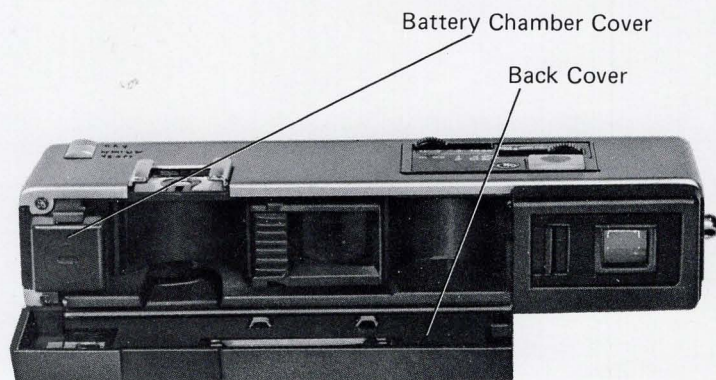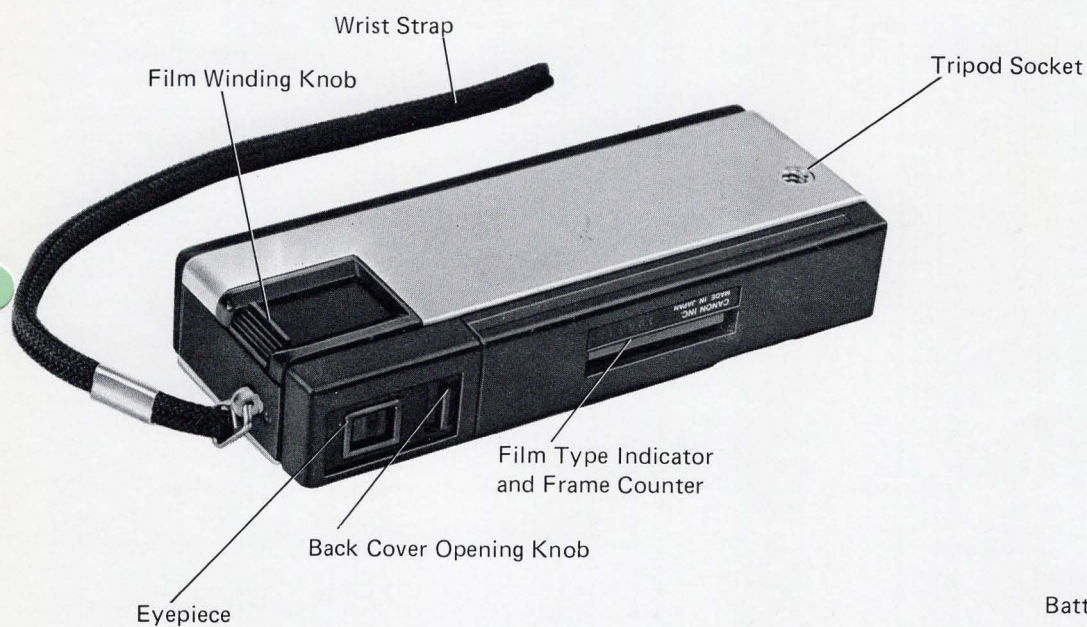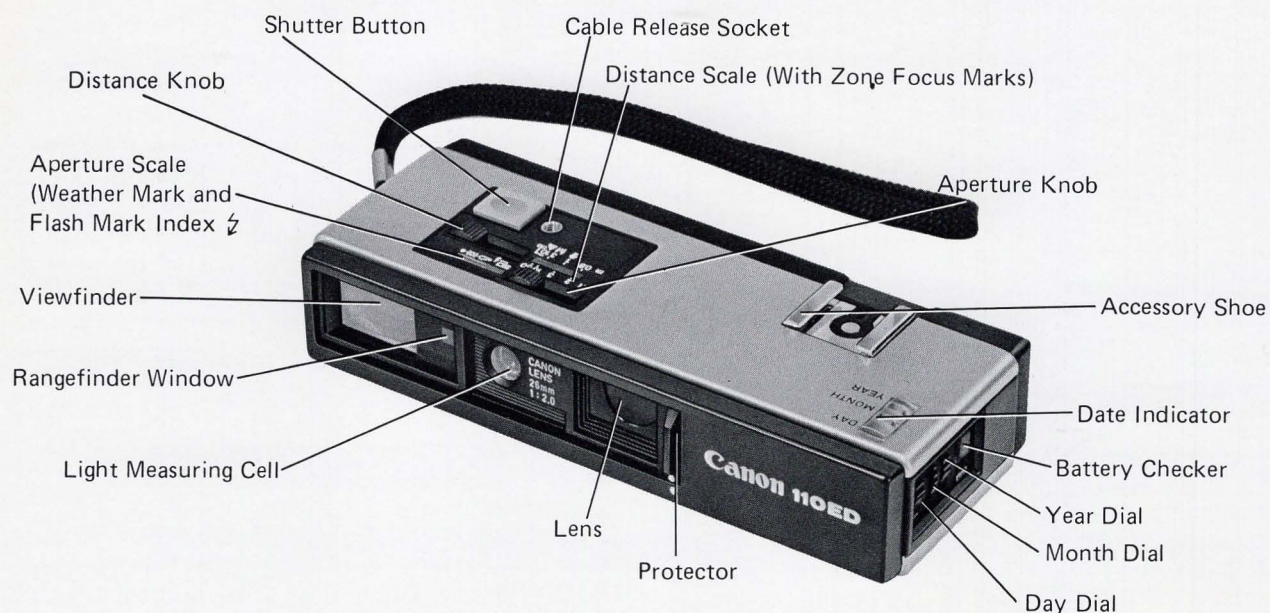

ACCESSORY

Canolite ED

The Canolite ED is an electronic flash unit especially designed for the Canon 110 ED. It is directly connected to the camera body. There is absolutely no necessity for worrying about guide numbers.

ACCESSORIES

CODE NO.	DESCRIPTION
5-00291-20	Canolite ED
5-63061-00	Release 30
5-63062-00	Release 50
5-64017-00	Self Timer 8
5-43761-01	Close Up Lens 110 in case
4-60971-00	Soft Case
5-01401-00	Extender for Canolite ED