





Gitzo tripods, monopods, heads and accessories are acknowledged by professionals the world over as setting the industry's standards for excellence.

No gimmicks and no compromise on quality. Skilled design engineering, attention to detail and the finest high strength metal alloys, are used in the manufacture of Gitzo products. And now, for the first time, carbon fiber has been used to create the new Mountaineer Tripod and Monopod.

Combining strength and durability with lightness and practicality, these sturdy new additions to the Gitzo range will prove as enduring as their name suggests.

From the serious amateur to the professional, from 35mm to 8 x 10 still or cine/video camera, there is a Gitzo product to match every need exactly.

#### A Series of 8 Tripod Types

Each tripod has been designed especially to withstand a specified maximum weight of equipment, which is assessed as being placed above the centre of gravity of a fully extended tripod.

The diameter of the top tripod leg section is the key to this and determines the Series range, weight loadings and application.

The first numeral of the product reference used throughout this catalogue refers to the top leg diameter (shown here actual size). This helps you to match the correct ancillary equipment to your tripod.

So to choose the correct head, you simply match the first reference number of the head to the first reference number of the tripod. For example:- a G375, or a G376 head will match a G320 tripod (for heads with four reference numbers, please use the second numeral, eg:-.G1276)..



Series	Series reference	Size in.
TABLE	00	5/8
WEEKEND	0	3/4
SPORT	1	7/8
REPORTER / MOUNTAINEER	2	11/8
STUDEX &		
INTER PRO STUDEX	3	11/4
PRO STUDEX	4	11/2
TELE STUDEX	5	1 <sup>5</sup> /8



G1228 Mountaineer Carbon Fiber tripod (Featherweight).




#### Key to symbols

	Column Type	
	Closed Height	
	Plate Size	
	Pan	
////	Arm Type	
	Travel	
-		_

$\Lambda$	Max Height
lbs	Weight lbs
	Lateral Tilt
0	Tripod Series
2	Central column sections

小	Min Height
lbs max	Max Load lbs
<b>Ø</b>	Vertical Tilt
$\oslash$	Top Tube
•	Telescopic leg sections

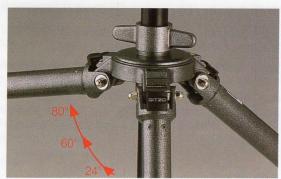

Performance tripod.



Secure twist locks rings and wing locks.

#### **Quality & Precision**

Gitzo tripods are superbly engineered to withstand the most robust handling. High strength light alloy tubes resist twist and stress to provide absolute stability. Fine-tolerance telescopic legs ensure smooth silent gliding action every time.

All tripods are easily assembled and maintained. while fiber clamping bushes protect metal surfaces against damage and wear.

#### Standard or Performance Tripods

Gitzo make two styles of tripod - each offering very distinctive benefits.

Standard style tripods have one fixed position leg spread off 24° which ensures the center column is always vertical at a given leg extension and are rock steady.

Performance style tripods are fitted with sliding stops, which enable the legs to be individually set at different angles, providing more flexibility including very low angle shots. There are two set angles on the Series 0, 1, 2 and 3 Studex of 24° and 60°, and three set angles of 24°, 60° and 80° on the Inter Pro Studex Series 3, plus 4 and 5 series.

#### Twist Lock-Offs

All telescopic movements, including adjustment to the central column, glide effortlessly into position. The cushioned locking rings and wing locks ensure no slippage whatsoever, yet are all released with great ease.

All tripods are fitted with reversible 3/8 and 1/4 inch fixing screws.



Reversible fixing screw.

#### **Finger Tip Control**

A wide choice of interchangeable heads, for both photographic and cine/video use, extends tripod versatility. Three axis and ball heads are precision engineered for superb fingertip control.

Gitzo heads are fitted with 1/4". K. fittings as standard. See page 14 for optional 3/8", C, fitting.

INTRODUCTION

**CENTRE COLUMNS** 

TRIPODS



Standard tripod.

#### Steady Support

The center section is made from an exceptionally strong alloy to provide high torsional support for the legs, eliminating vibration and ensuring maximum rigidity for the tripod.

#### Extra Height

Many of the tripods are quickly and easily fitted with either a sliding Rapid reversible column, or with a geared column for fine adjustment.



Geared column.

Rapid column.



LATERAL ARMS MONOPODS 10-13 GITZO HEADS GITZO HEAD AND TRIPOD GUIDE 13 **FISHPOLES** 14 LEVELLING BASES 14 14-16 **ACCESSORIES** PRODUCT INDEX 16

2-3

4-7

8

8

9



G0011 Table Tripod, G01 Standard and G026 Compact Performance.



G126 Tatalux Performance and G101 Standard.

#### **TABLE Series 00**

Top leg Ø:- 5/8"
Matching head 00

Loads up to:- 61/2 lbs

Application:- Most popular table and/or mini tripod offering maximum rigidity for compact cameras and specialist applications. Features effortless double lift center column and can be used as a firm wall brace. Extremely portable, fits into the smallest of accessory bags!


#### **WEEKEND Series 0**

Top leg Ø:- 3/4"mm Matching head 0

companions.

Loads up to:- 51/2 lbs

**Application:-** Very compact yet sturdy tripods for mounting lightweight 35mm and small camcorders. Choice of fixed (STANDARD) or variable (PERFORMANCE) leg spreads. Ideal travelling

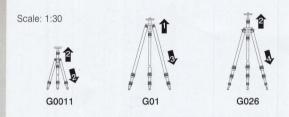


Ref	Model		$\mathbf{\Lambda}$	个	Ĩ	lbs	max
G0011	Table Tripod	R	185/8	65/8	81/2	3/4	61/2
G01	Standard	R	481/2	16	171/4	2	51/2
G026	Compact Performance	R	541/2	14	15	21/4	51/2

#### **SPORT Series 1**

Top leg Ø:- <sup>7</sup>/8" Matching head 1 Loads up to:- 10 lbs

Application:- Very suitable for all 35mm cameras and light weight video recorders, these tripods fall into two catagories. STANDARD models, with 24° leg spread and single lift center column or PERFORMANCE models, with 2 position leg spread and a double lift reversible center column. The Performance Tatalux is ideal for backpackers.

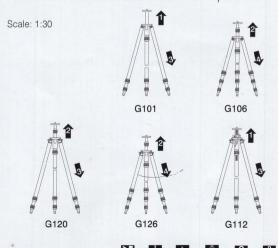


Model		$\Lambda$	小		lbs	max	
Standard	R	541/2	173/4	191/2	3	10	
Standard Tatalux	R	521/8	125/8	135/8	23/4	10	
Performance	R	581/4	191/4	205/8	31/4	10	
Performance Tatalux	R	533/4	14	15	3	10	
Performance	G	561/2	20	211/4	33/4	10	
	Standard Tatalux	Standard Tatalux R Performance R Performance Tatalux R	Standard         R         54½           Standard Tatalux         R         52½           Performance         R         58¼           Performance Tatalux         R         53¾	Standard         R         54½         17³/4           Standard Tatalux         R         52½         125/8           Performance         R         58½         19½           Performance Tatalux         R         53¾         14	Standard         R         54½         17³¼         19½           Standard Tatalux         R         52½         125½         135½           Performance         R         58¼         19¼         205½           Performance Tatalux         R         53¾         14         15	Standard         R         54½         173¼         19½         3           Standard Tatalux         R         52½         125%         135%         23¼           Performance         R         58½         19½         205%         3¼           Performance Tatalux         R         53¾         14         15         3	Standard         R         541/2         173/4         191/2         3         10           Standard Tatalux         R         521/8         125/8         135/8         23/4         10           Performance         R         581/4         191/4         205/8         31/4         10           Performance Tatalux         R         533/4         14         15         3         10

#### **REPORTER Series 2**

Top leg Ø:- 1<sup>1</sup>/8" Matching head 2 Loads up to:- 131/4 lbs

Application:- 35mm, 6 x 4.5 and lighter 6 x 6 cameras... this versatile fixed (STANDARD) or variable (PERFORMANCE) leg spread range with rapid or geared center column includes the unique Monotripod which has one removeable leg to form a monopod, (inset).

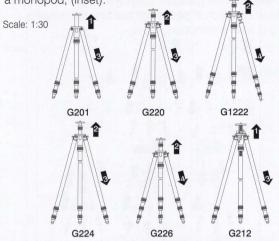

Ref	Model		$\Lambda$	$\wedge$		lbs	max
G201	Standard	R	571/2	181/4	193/4	4	131/4
G220	Performance	R	581/4	20	211/4	41/4	131/4
G1222	Monotripod	R	72	205/8	221/4	5	131/4
G224	Industrial Performance	R	733/4	231/4	25	5	131/4
G226	Compact Performance	R	581/2	16	173/4	41/4	131/4
G212	Performance	G	691/2	24	251/2	51/2	131/4



G220 Performance and G212 Performance (Inset: G1222 Monotripod).

#### **MOUNTAINEER Series 2**

Top leg Ø:- 1<sup>1</sup>/8" Matching head 2

Loads up to:- 131/4 lbs

**Application:-** The Mountaineer is a CARBON FIBER tripod. The advantage of CARBON FIBER is that it is 30% lighter than the equivalent aluminium tripod while maintaining the robustness and rigidity expected from Gitzo.

The Mountaineer is a performance model which enables the legs to be set individually at either 24° or 60° for low angle shots. The tripod features a Rapid center column and is suitable for 35mm,  $6 \times 4.5$  and light  $6 \times 6$  cameras.

The Mountaineer's compact size, remarkable low weight and robustness make it an ideal choice for backpackers while being equally at home in the studio, providing no compromise on stability. The Mountaineer sets new standards for photographic tripods!



Scale: 1:30

Ref	Model		$\Lambda$	小	Ĩ	lbs	max
G1228	Mountaineer	R	607/8	183/4	201/2	3	131/2

Column Type: 0=No column R=Rapid G=Geared





G326 Compact Performance and G312 Performance (Inset: G1322 Monotripod).




G346 Compact Performance and G342 Performance.

#### STUDEX Series 3

Top leg Ø:- 1<sup>1</sup>/<sub>4</sub>" Matching head 3 Loads up to:- 193/4 lbs

Application:- Classic tripods that have the optimum specification to support all medium format light 4 x 5 and video cameras. All models have 2 independent leg spread angles giving easy access to any camera position. Rapid center columns are double lift and reversible while geared models are single lift. Includes the unique Monotripod which has one removeable leg to form a monopod, (inset).

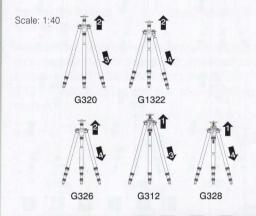


Ref	Model		· <b>W</b>	个		lbs	max
G320	Performance	R	731/2	253/8	28	61/2	193/4
G1322	Monotripod	R	707/8	21	223/4	61/2	193/4
G326	Compact Performance	R	711/4	201/2	221/4	6	193/4
G312	Performance	G	697/8	26	281/4	71/4	193/4
G328	Compact	G	667/8	211/2	231/4	63/4	193/4

### **INTER PRO STUDEX Series 3**

Top leg Ø:- 1<sup>1</sup>/<sub>4</sub>" Matching head 3 Loads up to:-22 lbs

**Application:-** For photographers who will settle for nothing less than a Studex tripod, but require extra stability for loads up to 22 lbs. Incorporates all the features of the Pro Range with interchangeable center columns, wing lock-offs and 3 position leg spread. Ideal for medium format and heavier camcorders.




Ref	Model		//\	$ \uparrow $		lbs	max
G340	Performance	0	601/2	251/4	275/8	6	22
G341	Performance	R	753/4	271/8	291/2	7	22
G342	Performance	G	74	271/8	291/2	81/4	22
G345	Compact Performance	0	573/4	201/2	221/2	6	22
G346	Compact Performance	R	721/4	223/8	241/4	61/2	22
G347	Compact Performance	G	711/8	223/8	241/4	73/4	22

#### **PRO STUDEX Series 4**

Top leg Ø:- 1<sup>1</sup>/2"
Matching head 4

Loads up to:- 26 lbs

**Application:-** Cameras up to 8 x 10 and Video... Pro Studex takes some beating for versatility with a choice of six models, all with 3 position leg spread, interchangeable rapid (sliding) or geared columns plus special short columns for extra low shots.

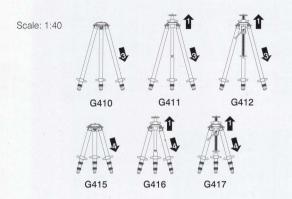

Ref	Model		$\mathbf{V}$	小	Ĩ	lbs	lbs max
G410	Performance	0	641/8	263/4	291/2	81/2	26
G411	Performance	R	781/2	291/8	311/4	93/4	22
G412	Performance	G	757/8	291/8	311/4	111/2	26
G415	Compact Performance	0	451/2	171/2	191/4	63/4	26
G416	Compact Performance	R	597/8	191/4	21	8	22
G417	Compact Performance	G	571/4	191/4	21	93/4	26




G416 Compact Performance and G412 Performance.

#### **TELE STUDEX Series 5**

Top leg Ø:- 15/8" Matching head 5 Loads up to:- 44 lbs

**Application:-** Similar to the Pro Studex but with larger diameter legs for heavy video, TV and 8 x 10 cameras. Ideal for ENG users.

(inset - Lightweight G515 Performance Industrial).

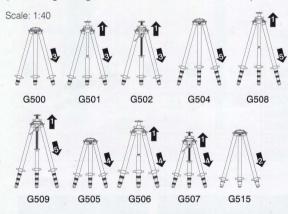

Ref	Model		$\Lambda$	$ \uparrow $	ı	lbs	max
G500	Performance	0	631/4	261/4	281/2	93/4	33
G501	Performance	R	761/2	281/2	303/4	103/4	22
G502	Performance	G	74	281/2	303/4	121/2	33
G504	Geant Performance	0	98	281/2	311/2	121/4	33
G508	Geant Performance	R	1111/4	303/4	333/4	131/4	22
G509	Geant Performance	G	1083/4	303/4	333/4	151/4	33
G505	Compact Performance	0	583/8	211/8	231/4	9	33
G506	Compact Performance	R	713/4	24	251/2	101/4	22
G507	Compact Performance	G	691/8	24	251/2	12	33
G515	Performance Industrial	0	473/4	297/8	321/2	81/2	44




G506 Compact Performance and G509 Geant Performance (Inset: G515).

#### **CENTER COLUMNS**



Left to right, G526, G335C and G525 center columns.



STUDEX

Tripods in the series 00 to 3 come complete with Rapid (Sliding) or Geared center columns.

The Inter Pro Studex. Pro Studex and Tele Studex ranges have interchangeable columns available as Rapid (Sliding) single lift reversible or double lift for extra height, or geared for superfine control.

Very short columns are also available for very low angle work.


Scale: 1:20

G525

Ref EXTRA	Model LOW		Ĩ		lbs	0
G135C	Sport	R	5	-	1/4	1
G235C	Reporter	R	51/2	-	1/2	2
G335C	Studex & Inter Pro Studex	R	51/2	-	1/2	3
G435	Pro Studex Range	R	51/2	-	1/2	4/5
STUDE	X					
G315	Standard	R	133/8	17	1	3

31000	_^						
G315	Standard	R	133/8	17	1	3	
G317	Compact	R	101/4	15	1	3	
G336	Standard	G	121/4	173/8	21/4	3	
G338	Compact	G	83/4	14	2	3	
					7		

PRO S	TUDEX AND TELE STU	JDEX			PRO STUDEX AND TELE STUDEX									
G525	Standard	R	131/4	171/2	11/2	4+5								
G524	Standard Double	R	28	171/4	13/4	4+5								
G527	Compact	R	101/4	143/4	11/2	4+5								
G526	Standard	G	103/4	171/2	31/4	4+5								
G528	Compact	G	71/2	143/4	3	4+5								
G529	Long	G	243/8	321/4	51/4	4+5								

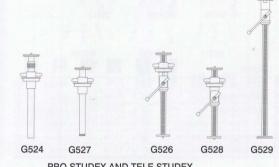

### LATERAL ARMS


**EXTRA LOW** 

G235C

G435C

G135C

G335C

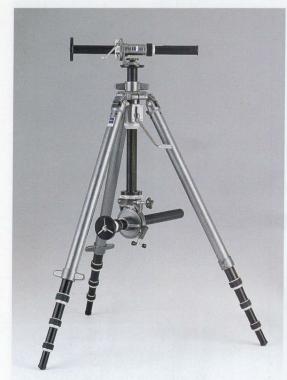

Top, G535 Geared lateral arm, and opposite, G540 Right Angle Bracket with G315 center column used as a lateral arm.


Lateral arms enable cameras to be positioned above or below the tripod apex in positions which might otherwise be obstructed by the tripod legs.

G338

Both Rapid (Sliding) and Geared versions are available.

For optimum rigidity, make sure to select a lateral arm with the same diameter as the tripod's outer section.

PRO STUDEX AND TELE STUDEX Scale: 1:20

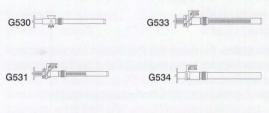

Ref	Model	"	Ü		Q lbs	0
G530	Sport	R	111/4	15	3/4	1
G531	Sport	G	101/8	143/4	1-	1
G532	Reporter	R	13	173/4	1	2
G533	Reporter	G	13	181/4	13/4	2
G534	Studex	R	131/2	181/8	1	3

123/4

Column Type: R=Rapid G=Geared

G

G535 Studex



G349 Circular camera platform. (Tripod series 3). G449 Circular camera platform. (Tripod series 4+5).



G540 Right Angle Bracket.



2

3

G541 Graduated Right Angle Bracket.

181/2



G1565 Monopod.

G566 Monopod.

0  $\bigvee$ lbs max Ref Model 611/8 243/4 11/4 63/4 G1561 Sport 7/8 G1563 Reporter 11/8 64 211/4 11/2 83/4 G1563LReporter 801/4 11/2 83/4 11/8 223/8 G1564 Studex 11/2 621/2 215/8 13/4 171/2 171/2 G1564LStudex 11/4 781/2 223/8 2 G1565 Studex with brace 11/2 623/4 217/8 2 171/2 G566 Mini-Studex 11/2 531/4 141/2 11/2 11 G558 Gitzopod 11/2 601/4 261/2 21/4 11 G1568 Mountaineer 11/8 651/4 215/8 83/4

Gitzo Monopods set the standards only others can aspire to. This range of compact, lightweight, corrosion resistant Monopods includes a model for every application with 3, 4, 5 and 6 section lifts with head platform and interchangeable 3/8" (C) or 1/4" (K) camera fixing screws. All models are fitted with comfortable wrist straps.

Models G565 and G567 are fitted with an independent tilting head and a two section shoulder chest brace. This is adjustable for both length and angle. The heads have a 1/4" (K) fixed camera screw only.

No sporting or similar live action coverage would be complete without a Gitzo Monopod! Gitzopod - a unique combination of Monopod, Chestpod. Emergency tripod and Tablepod.

Weighing just 21/4 lbs and suitable for cameras up to 11 lbs, Gitzopod features a fully adjustable telescopic shoulder brace which is independent of the panoramic tilting head.

Supplied together with a neck harness for extra stability. The harness also frees both hands for operating the camera.






The new Mountaineer monopod that combines the advantages of exceptional light weight with strength and rigidity. These qualities plus the compact size make it the first choice for serious amateurs and busy professionals on the move.

Scale: 1:20 G1561 G1563



G1568 Mountaineer.

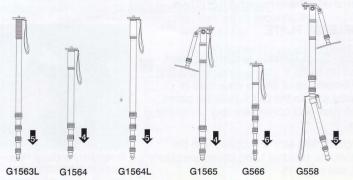

#### GITZO PHOTOGRAPHIC HEADS

Equally as important as the Gitzo tripods in providing rock solid support, the Gitzo range of heads are carefully engineered to position the camera precisely in the required shooting position with the minimum of fuss for optimum results.

There are three specific ranges of heads designed to cover all photographic possibilities and eventualities, offering between them unlimited support and flexibility. Each head is carefully crafted to take specific pay loads to work in combination with the equivalent Gitzo tripod or can be fitted to most manufacturer's tripods.

Gitzo tripods cover all angles!

#### **BALL HEADS**

There are seven Ball Heads from which to chose from, catering for all sizes and types of camera. There is one model for each of the Gitzo tripod series all offering the still photographer ease of handling and reliability.

#### **RATIONNELLE 3 WAY HEADS**


The range of 3 Way Heads allow photographers the freedom of movement to shoot in all three axis. pan, tilt and side to side, irrespective of size and type of equipment used.

An important feature on these heads is the forward and backward tilt with friction counterbalance and left or right hand operation.



G1276 Ball Head with Quick Release Plate.







G1372 Three Way Head.



G1372 Three Way Head.

#### **RATIONNELLE LOW** PROFILE HEADS


Low profile heads are intended for particularly heavy, large format camera equipment and video cameras.

Photographers are able to use larger cameras comfortably, making full use of the benefits of vertical and lateral tilt and 360° panning.



G1270 Low Profile Head with tilt, pan and side to side control locks.

To release the Quick Plate, squeeze secondary safety lock and push lever forward at the same time.



To insert Quick Release plate press down and plate snaps into position automatically.

# QUICK RELEASE PLATE

The Gitzo Quick Release system has been introduced on some of the Rationnelle and Ball Heads. Efficient use of time is important in photography and so the Quick Release plates provide an easy and convenient way of mounting

A standard plate size is supplied with the relevant models, optional Long plates are also available, see page 15.

#### **BALL HEADS**



G075 Ball Head.



G175 Ball Head.



G1275 Ball Head.



G1276 Ball Head.



G1375 Ball Head.



Exceptionally smooth rotation, positive locking and rapid camera mounting are all features common to the exclusive Gitzo-designed range of ball heads.

G1376 Ball Head.

head as easily.



G1575 Ball Head.



G1576 Ball Head.

The graduated base, with independent locking facilities permits perfect panoramic photography. The design of the panoramic base permits the ball heads to be used for table top or near ground level work without the use of a tripod. Models G1275, G1276, G1375, G1376 and G1576 have an increased operational range due to the introduction of a rotating central socket which allows unrestricted movement. A Quick Release plate with secondary safety lock and the option of a Long Plate provide additional flexibility on Model G1276, G1376

> 1/4" (K) screw fittings are supplied as standard, but 3/8" (C) fittings are also available on request (see page 14).

Ref	Model	lbs		max	<b>*</b>	<b>Ø</b>		
G075	Ball Head	1/4	13/8	31/4	+90°/-10°	10°/10°	360°	0
G175	Ball Head	1/2	13/4	61/2	+90°/-10°	10°/10°	360°	. 1
G1275	Ball Head	1	13/4x21/2	11	+90°/-10°	360°	360°	2
G1276	Ball Head 2	13/4	11/2x2	11	+90°/-10°	360°	360°	2
G1375	Ball Head	21/4	23/8x23/4	131/4	+90°/-10°	360°	360°	3
G1376	Ball Head	25/8	21/4x21/4	131/4	+90°/-10°	360°	360°	3
G1575	Ball Head	3	23/8x23/4	22	+90°/-10°	360°	360°	4/5
G1576	Ball Head 4/5	31/2	21/4x21/4	22	+90°/-10°	360°	360°	4/5

# RATIONNELLE THREE WAY HEADS



G1171 Three Way Head.



G1371 Three Way Head.



G470 Three Way Head.

Each head has been carefully designed to carry a specific load which ensures optimum performance in all three axis; vertical and lateral tilt with  $360^\circ$  panning.

The G1172 and G1372 have the added facility of a Quick Release plate with secondary safety lock and the option of a long plate (see page 15). The ergonomically designed hand grips ensure that the desired shooting position is securely locked with the minimum of effort.

 $^{1}/_{4}$ " (K) screw fittings are supplied as standard, but  $^{3}/_{8}$ " (C) fittings are also available on request (see page 14).

Ref	Model	lbs	max	<b>*</b>	<b>Ø</b>	$\bigcirc$	$\odot$
G1171	Three Way Head	13/4 15/8 x 21	/8 51/2	+90/-60°	90°/50°	360°	0/1
G1172	Three Way Head	13/4 11/2 x 2	2 51/2	+90/-60°	90°/50°	360°	0/1
G1371	Three Way Head	31/4 23/8 x 23	1/4 13	+90/-60°	90°/50°	360°	2/3
G1372	? Three Way Head	31/4 21/4 x 21	/4 13	+90/-60°	90°/50°	360°	2/3
G470	Three Way Head	31/2 61/2 x 33	3/4 22	+90/-60°	90°/50°	360°	4
G472	Three Way Head	3 2 <sup>3</sup> / <sub>4</sub> x 3 <sup>3</sup>	/4 20	+90/-60°	90°/50°	360°	4



G1172 Three Way Head.



G1372 Three Way Head.



G472 Three Way Head.

#### RATIONNELLE LOW PROFILE HEADS

The low profile heads provide solid support and flexibility for heavier large format cameras and video cameras. The distance from the top of the tripod to the camera platform is reduced to ensure that the center of gravity of the camera is kept over the middle of the tripod to avoid the possibility of overbalancing.

Both models can pan smoothly through 360° and provide a vertical tilt of +90° and -20°. Side to side movement is 60° to the left and 90° to the right, allowing the photographer to direct the camera at virtually any angle without compromising on stability.

The G1570 has a larger platform and two fixing screws and is especially suitable for monorail cameras. It is supplied with 1/4"(K) and 3/8"(C) camera mounting screws.



G1270 Low Profile Head.



MEDIUM FORMAT

G1570 Low Profile Head.

LARGE FORMAT

Ref	Model	lbs		max		<b>Ø</b>		
G1270	Low Profile Head	11/2	43/4 x 23/4	10	+90°/-20°	90°/60°	360°	1/2
G1570	Low Profile Head	33/8	65/8 x 4	22	+90°/-20°	90°/60°	360°	4/5

35 SLR CAMERA

### GITZO HEAD AND TRIPOD **GUIDE**

OLU	IDE			00 0111	O7 1111 11	•						-			
A gui appli detai than	cations. The led in the bro	e most common Gitzo range of tripods as chure is more extensive illitate a wide range of nents.	35mm Camera with Wide Angle, Standard, 4" or Shorter Lens	35mm Camera with 77/8" or Shorter Telephoto Lens	35mm Camera with 117/8" or Shorter Telephoto Lens	35mm Camera with 117/8" or Longer Lens	6 x 6, 6x5 Camera with Standard	6 x 7 Camera with Standard Lens	6 x 6, 6x5 Camera with 77/8" Lens or Shorter	6 x 7 Camera with 77/8" Lens or Shorter	6 x 6,6 x 7 Camera with 300mm Lens	4 x 5 Field Camera	4 x 5 View Camera	5 x 7 View Camera	8 x 10 View Camera
	SERIES	REFERENCE	ard,			_				1	+ 10				ω
	1	G1171 G1172	•	•			•								
HEAD	2	G1270		•	•		•	•				•			
A	3	G1370 G1371 G1372			•	•		•	•	•	•	•	•	•	
0	4/5	G470 G472 G1570				•			•	•	•		•	•	•
Œ	0	G075	•												
2	1	G175	•												
도	2	G1275 G1276	•	•	•		•								
BALLHEAD	3	G1375 G1376		•	•			•	•	•		•			
6	4/5	G1575 G1576			•	•		•	•	•	•	•	•	•	•
	0	GO26	•												1411
	1	G120 G126 G112	•	•		N = N = N = N									
TRIPOD	2	G226 G224 G220 G212 G1228 G1222 G320													
OD	3	G312 G328 G340 G345 G1322						*				•			
	4	G412 G417				•					•		•	•	•
	5	G502 G509 G507				•					•		•	•	•

#### **FISHPOLES**





G11510 Microphone Holder, shown above attached to a Fishpole.

Ref	lbs	<b></b>	$\Lambda$	0
G556	1	79	313/4	3/4, 5/8, 7/16
G557	13/4	1033/4	303/4	7/8, 3/4, 5/8, 7/16
	Outside Dia.	Inside Usable Dia.	Length	Height
G11510	27/16	11/3	27/8	35/8

Two models of the new Gitzo Fishpole microphone poles are available - a three section pole, G556, and a four section pole, G557. These can be used in conjunction with the optional Microphone Holder G11510 which holds a range of sizes of microphones.

G1423 Adapter to 100mm Bowl. Adapter to convert tripods with 3/8" screw head fixing to 100mm bowl for video heads with 100mm ball.

G1422 Adapter to 75mm Bowl. Adapter to convert series 3 & 4 tripods without center column to take video heads with 75mm ball.



G1423 Adapter to 100mm Bowl. Weight 1<sup>3</sup>/8 lbs



G1422 Adapter to 75mm Bowl. Weight <sup>1</sup>/<sub>4</sub> lbs

### LEVELLING BASES



Gitzo levelling bases have a 15° adjustment and all are fitted with a spirit level. Efficient locking is ensured by a toggle lever.

Ref	Model	lbs	max	
G321	Series 3 Levelling Base	13/8	22	340, 345
G421	Series 4/5 Levelling Base	11/4	33	410, 500, 515

#### **SCREW TYPES**

3/8" and 1/4" camera fixing screws.

Ref No	Thread.	Suitable for heads					
055-25	1/4"	G055					
055-27		G055					

G321 Levelling Base.

#### **ACCESSORIES**




G391 Dolly -max load 33lbs - 3" wheels. G392 Dolly -max load 44<sup>1</sup>/8lbs - 5" wheels. Both Dollies offer immediate maneuverability, can be folded away and have individual wheel locks. Both units have camera fixings for floor level shooting.

# G1539 & G1584 Double Platforms.

G1539 enables cameras (or 2 heads) to be fitted - at 17" centers - to a tripod column. With G1584 you can couple two cameras to one tripod, 11" centers. Suitable for 35cm or 4 x 5 cameras.





030-27		G1270, Monopodes G000, G1000, G1171, G1270
050-27		G1270, Monopodes G558, G1565, G1171, G1275
150-27		G1370, G1371, G1375, G1570, G1575
050-25	1/4"	G1171, G1270, G1275, G1370, G1371, G1570, G1575
050-26	3/8"	G1171, G1270, G1275, G1370, G1371, G1570, G1575





#### **ACCESSORIES**

#### **Adaptor Plates**

A range of durable quick release plates ensuring simple, positive and above all rapid camera fixing. Purpose designed adaptor plates can be specified for both 35mm still and video cameras and can be fitted to camera platforms or ball heads.

Model G386 is a large 4" x 13/4" plate which will carry large cameras or provide positive fixing for monorail cameras.





G583 Offset Bracket. Ideal for cameras with handgrip or large lenses. Or where attaching Polaroid® backs impinges on the camera platform.



G385, 3 x 13/4" Adaptor Plates.



G386, 4" x 13/4" Adaptor Plates.



Quick Release Plates

Quick Release Long.



Quick Release



G387, Spare Plate for G385, 3" x 13/4" Adaptor.

Padded and Standard Tripod Bags



G388, Spare Plate for G386, 4" x 13/4" Adaptor.



Quick Release Adaptor. G1285 Quick Release Adaptor; for Series 1 & 2 Heads. G1385 Quick Release Adaptor; for Series 3 & 5 Heads.



(Set of 3) All weather shoe to fit to tripod providing stability in snow, mud, sand etc.



These showerproof durable bags have been designed

built to last. Practical and stylish, all the bags have zip

to carry all sizes of tripods and heads, and they are

GE5P & GE3P Padded Tripod Bags.

Ref	Length	Tripod series	Diameter
GE0	211/2	0	4
GE1	271/2	1	4
GE1P	271/2	1	4
GE2 33		.2	4
GE2P	33	2	4
GE3	37	3	6
GE3P	37	3	6
GE4	381/4	4	73/4
GE4P 38 <sup>1</sup> / <sub>4</sub> 4		73/4	
GE5	42	5	91/2
GE5P	42	5	91/2



G087 Strap Single size adjustable strap for all tripods, incorporating an anti-slip shoulder pad.



Canvas Aprons, G088S Small, G088L Large. Strapped to the tripod legs this immensely tough apron allows you to vary the tripod viewpoint without misplacing accessories.



G065 Monitor Platform. A 13" x 153/4" platform which can be fitted to any Gitzo tripod. Safely supports supplementary equipment such as monitors, mixers, tape recorders.



GE0 Standard Tripod Bag.

# PRODUCT INDEX

TRIPO Ref	Model		$\Lambda$	小	ı İ	lbs	max	Pag
TABLE		11.						
G0011	Table Tripod	R	185/8	65/8	81/2	3/4	61/2	4
WEEKE	ND							
G01	Standard	R	481/2	16	171/4	2	51/2	4
G026	Compact Performance	R	541/2	14	15	21/4	51/2	4
SPORT								
G101	Standard	R	541/2	173/4	191/2	3	10	4
G106	Standard Tatalux	R	521/8	125/8	135/8	23/4	10	4
G120	Performance	R	581/4	191/4	205/8	31/4	10	4
G126	Performance Tatalux	R	533/4	14	15	3	10	4
G112	Performance	G	561/2	20	211/4	33/4	10	4
REPOR'	TER							
G201	Standard	R	571/2	181/4	193/4	4	131/4	5
G220	Performance	R	581/4	20	211/4	41/4	131/4	5
G1222	Monotripod	R	72	205/8	221/4	5	131/4	5
G224	Industrial Performance	R	733/4	231/4	25	5	131/4	5
G226	Compact Performance	R	581/2	16	173/4	41/4	131/4	5
G212	Performance	G	691/2	24	251/2	51/2	131/4	5
G1228	Mountaineer	R	60 <sup>7</sup> /8	183/4	201/2	3	131/2	5
STUDE	(						-	
G320	Performance	R	731/2	253/8	28	61/2	193/4	6
G1322	Monotripod	R	707/8	21	223/4	61/2	193/4	6
3326	Compact Performance	R	711/4	201/2	221/4	6	193/4	6
G312	Performance	G	697/8	26	281/4	71/4	193/4	6
G328	Compact	G	667/8	211/2	231/4	63/4	193/4	6
0.000	PRO STUDEX	u	00.78	21.72	20.74	0.74	139/4	0
G340	Performance	0	601/2	251/4	275/8	6	22	6
G341	Performance	R	753/4	271/8	291/2	7	22	6
G342	Performance	G	74	271/8	291/2	81/4	22	6
G345	Compact Performance	0	573/4	201/2	221/2	6	22	6
G346	Compact Performance	R	721/4	223/8	241/4	61/2	22	6
3346 3347	Compact Performance	G	711/8	223/8	241/4	73/4	22	6
		G	7 1 1/8	229/8	241/4	79/4	22	0
PRO ST		0	0.41/:	002/	001/-	01/-	00	7
G410	Performance	0	641/8	263/4	291/2	81/2	26	
G411	Performance	R	781/2	291/8	311/4	93/4	22	7
G412	Performance		757/8	291/8	311/4	111/2	26	
G415	Compact Performance	0	451/2	171/2	191/4	63/4	26	7
G416	Compact Performance	R	597/8	191/4	21	8	22	7
G417	Compact Performance	G	571/4	191/4	21	93/4	26	7
TELE ST		-		2211				_
3500	Performance	0	631/4	261/4	281/2	93/4	33	7
3501	Performance	R	761/2	281/2	303/4	103/4	22	7
3502	Performance	G	74	281/2	303/4	121/2	33	7
3504	Geant Performance	0	98	281/2	311/2	121/4	33	7
3508	Geant Performance	R	1111/4	303/4	333/4	131/4	22	- 7
3509	Geant Performance	G	1083/4	303/4	333/4	151/4	33	7
3505	Compact Performance	0	583/8	211/8	231/4	9	33	7
3506	Compact Performance	R	713/4	24	251/2	101/4	22	7
G507	Compact Performance	G	691/8	24	251/2	12	33	7
3515	Performance Industrial	0	473/4	297/8	321/2	81/2	44	7

CENTER COLUMNS Ref Model EXTRA LOW			Û		lbs		Page
G135C	Sport	R	5	-	1/4	1	8
G235C	Reporter	R	51/2	-	1/2	2	8
G335C	Studex & Inter Pro Studex	R	51/2	-	1/2	3	8
G435	Pro Studex Range	R	51/2		1/2	4/5	8
STUDE	(						
G315	Standard	R	133/8	17	1	3	8
G317	Compact	R	101/4	15	1	3	8
G336	Standard	G	121/4	173/8	21/4	3	8
G338	Compact	G	83/4	14	2	3	8
PRO ST	UDEX AND TELE STUDEX						
G525	Standard	R	171/2	131/4	11/2	4+5	8
G524	Standard Double	R	171/4	28	13/4	4+5	8
G527	Compact	R	143/4	101/4	11/2	4+5	8
G526	Standard	G	171/2	103/4	31/4	4+5	8
G528	Compact	G	143/4	71/2	3	4+5	8
G529	Long	- G	321/4	243/8	51/4	4+5	8

RAL ARMS Model	"			lbs		Page
Sport	R	15	111/4	3/4	1	8
Sport	G	143/4	101/8	1	1	8
Reporter	R	173/4	13	1	2	8
Reporter	G	181/4	13	13/4	2	8
Studex	R	181/8	131/2	1	3	8
Studex	G	181/2	123/4	2	3	8
	Model Sport Sport Reporter Reporter Studex	Model Sport R Sport G Reporter R Reporter G Studex R	Model         Image: Control specific properties of the control specific properties of th	Model         IIII           Sport         R         15         111/4           Sport         G         143/4         101/8           Reporter         R         173/4         13           Reporter         G         181/4         13           Studex         R         181/8         131/2	Model         IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	Model         Image: Control series of the control serie

Ref	DPODS Model	$\oslash$	$\Lambda$	ı İ	lbs	max	Page
G1561	Sport	7/8	611/8	243/4	11/4	63/4	9
G1563	Reporter	11/8	64	211/4	11/2	83/4	9
G1563L	Reporter	11/8	801/4	223/8	11/2	83/4	9
G1564	Studex	11/2	621/2	215/8	13/4	171/2	9
G1564L	Studex	11/4	781/2	227/8	2	171/2	9
G1565	Studex with brace	11/2	623/4	217/8	2	171/2	9
G566	Mini-Studex	11/2	531/4	141/2	11/2	11	9
G558	Gitzopod	11/2	601/4	261/2	21/4	11	9
G1568	Mountaineer	11/8	651/4	215/8	1	83/4	9

HEAL	08	0	_	Q	-			
Ref BALL F	Model HEADS	lbs		max		<b>Ø</b>		Pag
G075	Ball Head	1/4	13/8	31/4	+90°/-10°	10°/10°	360°	11
G175	Ball Head	1/2	13/4	61/2	+90°/-10°	10°/10°	360°	11
G1275	Ball Head	.1	13/4 x 21/2	11	+90°/-10°	360°	360°	11
G1276	Ball Head 2	13/4	11/2 x 2	11	+90°/-10°	360°	360°	11
G1375	Ball Head	21/4	23/8 x 23/4	131/4	+90°/-10°	360°	360°	11
G1376	Ball Head	25/8	21/4 x 21/4	131/4	+90°/-10°	360°	360°	11
G1575	Ball Head	3	23/8 x 23/4	22	+90°/-10°	360°	360°	11
G1576	Ball Head 4/5	31/2	21/4 x 21/4	22	+90°/-10°	360°	360°	11
THREE	WAY HEADS	11-11						
G1171	Three Way Head	13/4	15/8 x 21/8	51/2	+90/-60°	90°/50°	360°	12
G1172	Three Way Head	13/4	11/2 x 2	51/2	+90/-60°	90°/50°	360°	12
G1371	Three Way Head	31/4	23/8 x 23/4	13	+90/-60°	90°/50°	360°	12
G1372	Three Way Head	31/4	21/4 x 21/4	13	+90/-60°	90°/50°	360°	12
G470	Three Way Head	31/2	61/2 x 33/4	22	+90/-60°	90°/50°	360°	12
G472	Three Way Head	3	23/4 x 33/4	20	+90/-60°	90°/50°	360°	12
LOW PI	ROFILE HEADS				Habitania de la companya della companya della companya de la companya de la companya della compa			
G1270	Low Profile Head	11/2	43/4 x 23/4	10	+90°/-20°	90°/60°	360°	13
G1570	Low Profile Head	31/2	6 x 4 <sup>3</sup> / <sub>8</sub>	22	+90°/-20°	90°/60°	360°	13
LEVEI Ref	LLING BASES Model		lbs	lbi ma				Pag
G321	Series 3 Levelling Ba	ase	13/8	. 2	2 34	0, 345		14
G421	Series 4/5 Levelling	Base	11/4	33	3 41	0, 500, 515	11.1	- 14

FISHP Ref	OLES Model	lbs	小	$\Lambda$	0	Page
G556	Fishpole	1	79	313/4	3/4, 5/8, 7/16	14
G557	Fishpole	13/4	1033/4	303/4	7/8, 3/4, 5/8, 7/16	14
		Outside Usable Dia.	Inside Usable Dia.	Length	Height	Page
G11510	Microphone Holder	27/16	11/3	27/8	35/8	14

GE.01- GE.5	Tripod Bags	15
G385	3 x 13/4 Adaptor	15
G386	4 x 13/4 Adaptor	15
G387	Spare plate for 385	15
G388	Spare plate for 386	15
G391	Dolly	14
G392	Dolly	14
G088S	Small canvas apron	15
G088L	Large canvas apron	15
G1586	Location Shoe	15

G1539	Double platform	14
G1584	Double platform	14
G1285	Quick release adaptor	15
G1385	Quick release adaptor	15
G583	Offset bracket	15
G087	Strap	15
G065	Monitor platform	15
G349	Circular camera platform	8
G449	Circular camera platform	8
G540	Right angle bracket	8
G541	Grad. right angle bracket	8


# KEY TO SYMBOLS

个	Min Height	Ĩ	Closed Heigh
	Tripod Series		Vertical Tilt
0	Top Tube		Plate Size

Column Type	Max Height
Weight lbs	max Max Load lbs
Lateral Tilt	Travel
Pan	Arm Type

Column Type : 0=No column R=Rapid G=Geared

In the interest of further improving the Gitzo range, Gitzo reserve the right to change the specification within this catalogue at any time.





Bogen Photo: (201) 818-0060 Fax: (201) 818-9177 Service Only: (201) 818-0060 565 E. Crescent Avenue, P.O. Box 506, Ramsey, NJ07446-0506