

THE WORLD'S FINEST 35mm CAMERA & LENS


Nikon

MODEL "S"

and

Nikkor

RENOWNED
THE WORLD OVER

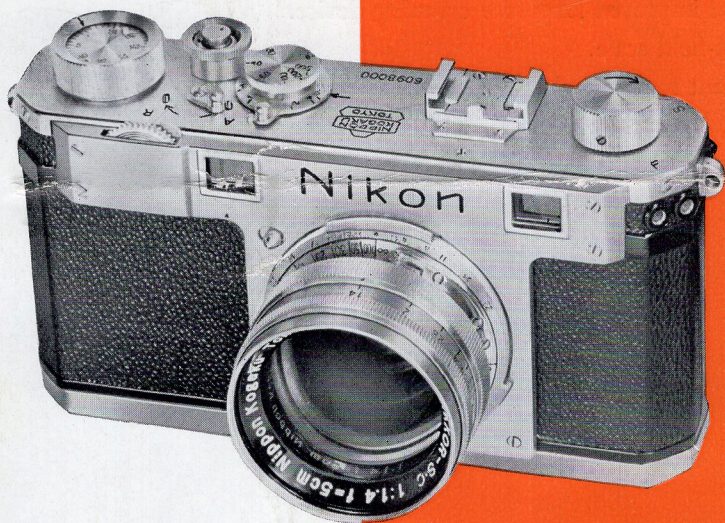

ESTABLISHED: 1917

NIPPON KOGAKU K.K.

TOKYO

Nikon Model "S"

USED BY THE WORLD'S TOP PHOTOGRAPHERS!

with NIKKOR Coated lens 5 cm f/1.4 or f/2

Coupled Rangefinder with single window for viewing and focusing.

Focal plane shutter, speeds : From 1 second to 1/500 second.


Built-in Flash Synchronization for all speeds.

New and improved Exposure counting device.

Depth-of-field scale.

Convenient focusing-wheel.

Comfortable exchange of
partly exposed film.

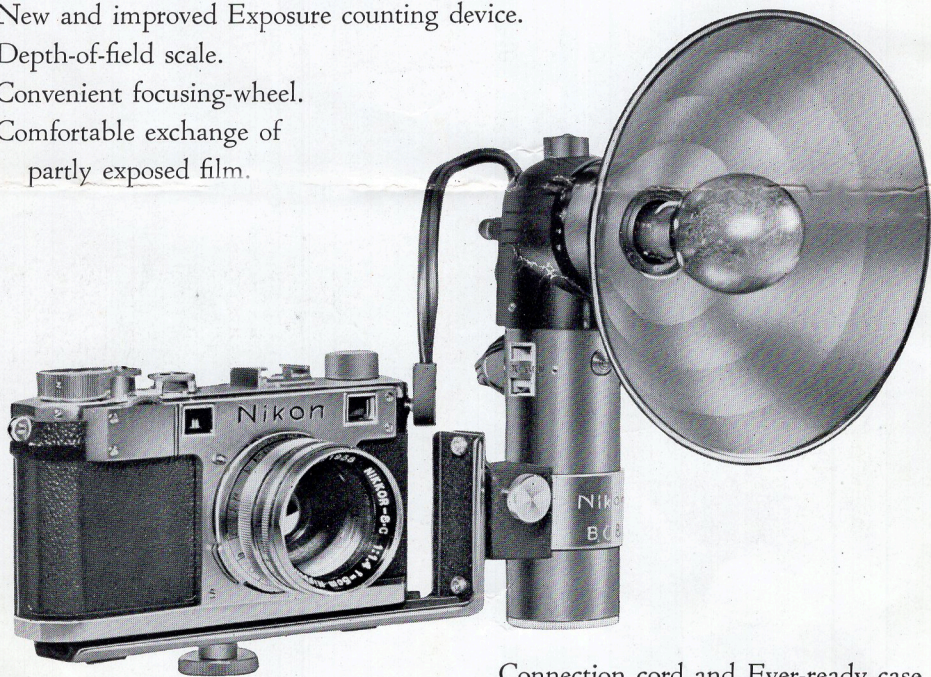


Connection cord and Ever-ready case
come with the camera.

SIMULTANEOUS COMPOSITION AND FOCUSING

are accomplished with the combined range
and view finder.

BUILT-IN FLASH SYNCHRO- NIZATION

is provided for both flash bulbs and strobolites.
The outlets are conveniently located.

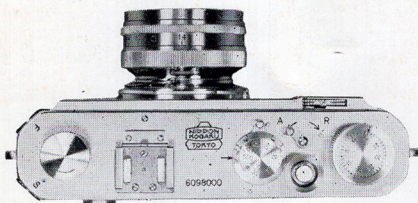


CONTROLS LOCATED

on the top plate of the camera, insure ready reference and instant operation.

SHUTTER SPEED DIAL

is located on a common axis. The film is advanced, the shutter wound, and the exposure automatically recorded in one operation.

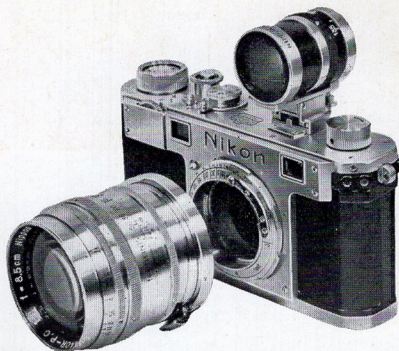


INTER-CHANGEABLE LENSES

are rapidly fitted onto and removed from the camera body by use of a bayonet type mount.

THE RANGE FINDER

couples with all focal length lenses available for the Nikon.

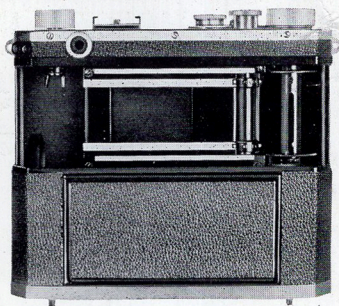


FILM LOADING

now requires the minimum of effort by use of a permanent take-up spool and completely removable camera back.

PRECISELY FINISHED PRESSURE PLATE

holds the film correctly and firmly in the focal plane.

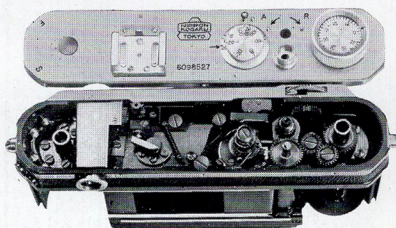

RELIABILITY

select materials, years of experience, skilled craftsmanship, uniform standards and meticulous inspection are guarantees of a quality that will satisfy the most discriminating photographer.

IN 35 mm PHOTOGRAPHY

Needle sharp focusing is most essential!


INTERCHANGEABLE LENS FOR **NIKKOR** NIKON & LEICA COATED

STRIKING SUPERIORITY TESTED AND PROVEN
BY WORLD'S TOP PHOTOGRAPHERS

"NIKKOR" lenses are Fully corrected and efficiently coated, with minimum resolution of at least 750 lines per inch over the entire picture area and periphery alike. This unsurpassed sharpness is ensured in black and white or color enlargement.

WIDE ANGLE LENS

3.5 cm f/3.5 3.5 cm f/2.5
(Smallest stop f/22) (Smallest stop f/22)
Picture angle 64°
Shortest focusing distance ... 3 ft

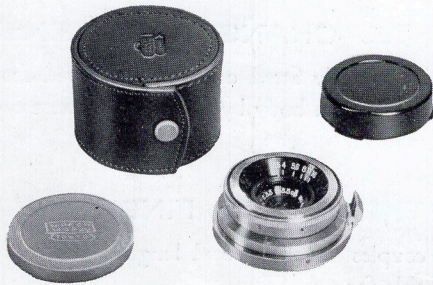

With Leather Case

STANDARD LENS

5 cm f/1.4 5 cm f/2
(Smallest stop f/16) (Smallest stop f/16)
Picture angle 47°
Shortest focusing distance ... 3 ft
(For Leica 1.5 ft)



Leather Case with Rear Lens-Cap available
at extra charge.

TELEPHOTO LENS

8.5 cm f/2
(Smallest stop f/32)
Picture angle 29°
Shortest focusing distance ... 3.5 ft



With Lens Hood and Leather Case

TELEPHOTO LENS

13.5 cm f/3.5
(Smallest stop f/32)
Picture angle 18°
Shortest focusing distance ... 5 ft




With Lens Hood and Leather Case

PICTURE ANGLE VARIES IN ACCORDANCE WITH FOCAL LENGTH

WIDE ANGLE LENS 3.5 cm




STANDARD LENS 5 cm

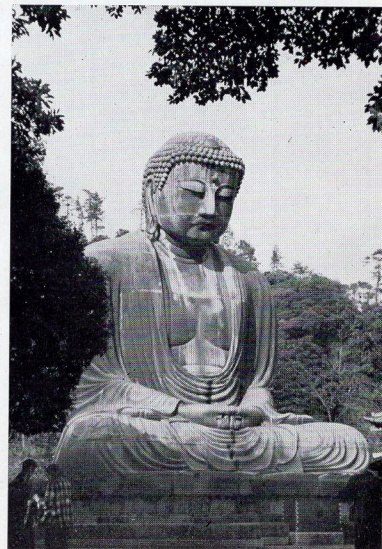

TELEPHOTO LENS 8.5 cm




TELEPHOTO LENS 13.5 cm

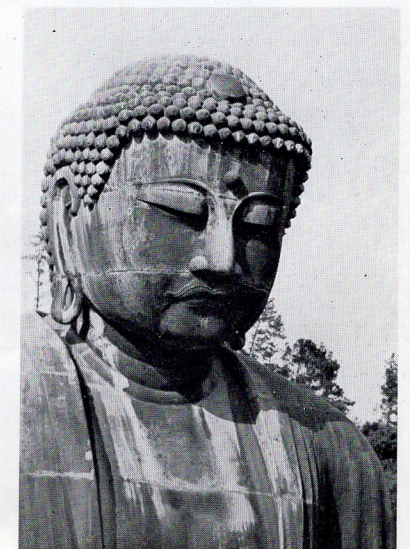

Flash Unit ^{for} Nikon

MODEL "WEST BCB-II"

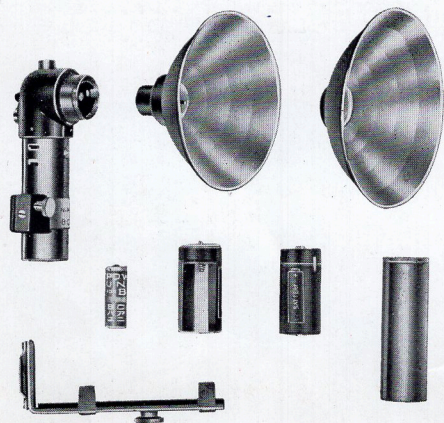

Circuit and Battery checked by simple operation of complete checking device.

Lamination Battery of 22.5V for hearing aid used with Power unit.


Reflector replaced with small one for Midget bulb.

Operates on Penlight or size D batteries.

Contains Outlet for multiple flash, Flash bulb ejector, Two reflectors, Power unit for lamination battery, Penlight battery case, Extension tube for size D battery, Bracket.

UNIVERSAL VIEW FINDER

Erect image with sharp and clear edge.

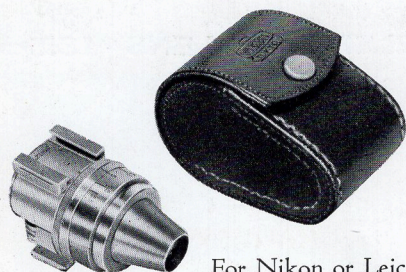

For Nikon or Leica

With Leather Case

VARIFOCAL VIEW FINDER

Erect image magnified when set for telephoto lens.



For Nikon or Leica

With Leather Case


FOR ALL NIKKOR LENSES FROM 3.5 cm TO 13.5 cm

Provided with Parallax compensator.

Focal length scale for Nikon: 3.5 cm, 5 cm, 8.5 cm, 13.5 cm

" " for Leica: 3.5 cm, 5 cm, 7.3 cm, 8.5 cm, 9 cm, 10.5 cm, 13.5 cm

Close-up Device ^{for} Nikon

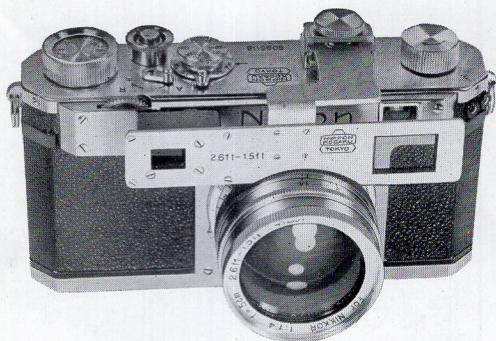


Permits photography at very close range
from 1.5 ft to 2.6 ft

Coupled with the built-in range finder of
the Nikon.

Model I . . . for 5 cm $f/2$
Model II . . . for 5 cm $f/1.4$
With Leather Case


INDIVIDUAL VIEW FINDER

With Leather Case

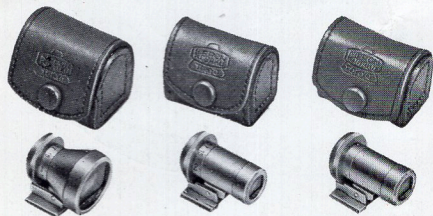

For Wide angle lens 3.5 cm For Telephoto lens 8.5 cm For Telephoto lens 13.5 cm


SPORTS FINDER

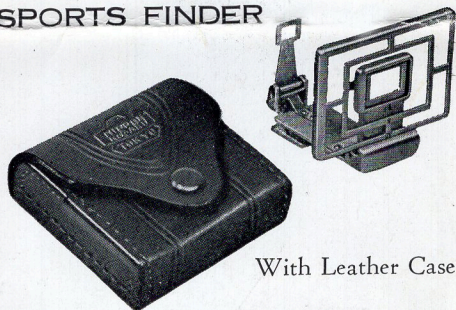

With Leather Case

The subject is seen before it enters the
actual field of view.

LENS HOOD FOR STANDARD LENS

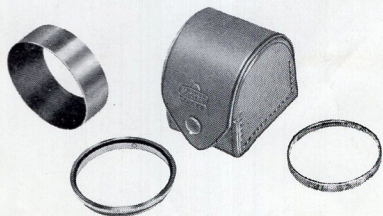

Model I . . . for 5 cm $f/2$
Model II . . . for 5 cm $f/1.4$
With Leather Case

SUPPLEMENTS

Connecting cord for flash unit.
Film magazine.
Ever-ready case for Nikon.
Lens cap for standard lens.
Leather case with rear cap for standard lens.
Lens hood with cap for telephot lens.
Lens hood for wide angle lens.

KATSUMURA CAMERA SHOP

NO.2 3CHOME GINZA CHUO-KU TOKYO

TEL KYOBASHI (50) 0374-7539

CARRYING CASE

FOR NIKON, NIKKOR AND
ACCESSORIES



MODEL I



MODEL II



NIPPON KOGAKU K.K.

OI-MORIMAE-CHO, SHINAGAWA-KU, TOKYO

TEL. (06) 2111-2115 • 3111-3115