


Rollei A26/C26

World's Smallest* Fully Automatic Camera for 126 Cartridge Films with Automatic Computer Flash and Combi Case

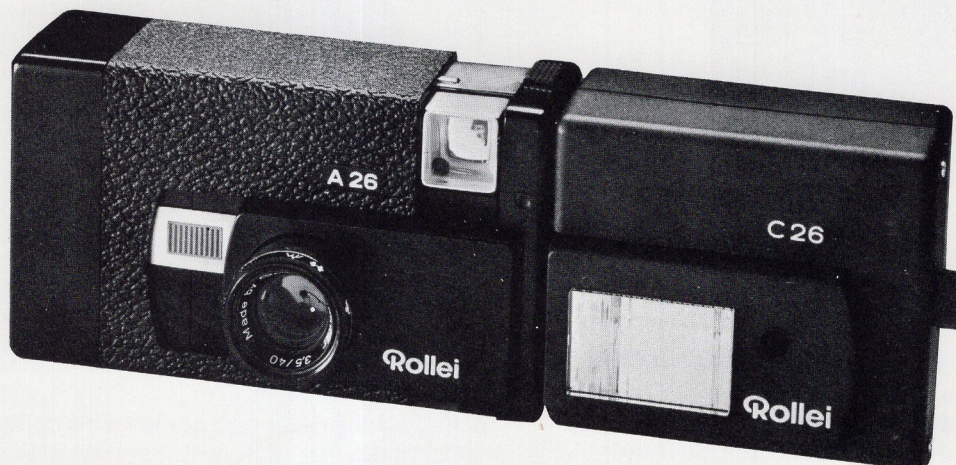

- Drop in film loading
- Automatic film load identification
- Automatic exposure positioning and counting
- Double exposure prevention—no wasted film frames
- Bright line viewfinder
- Brilliant 4-element 40mm Rollei Zeiss Sonnar lens
- Focusing lens mount—easy scale type with symbols and distance markings in feet and meters; 3½' to infinity
- Fully programmed shutter—f3.5 at 1/30 sec. to f22 at 1/250 sec. automatic with CdS cell exposure control
- Automatic film speed setting: ASA50 through ASA400
- Super-soft relay release
- Automatic green “go” signal in viewfinder (no “go”: attach C26 computer flash)
- Pull—shoot—push operation

* The ROLLEI A26 measures only 11.9 cubic inches compared to 13 cubic inches for the most popular 110 format camera! ROLLEI A26 takes a picture 3.5X larger than that same 110 camera. ROLLEI A26 = smaller camera; larger picture!

Unique—no other camera like it

Without a doubt the easiest camera ever to operate

Rollei engineered to perfection in design for superb pictures

ROLLEI A26 automatic pocket size 126 cartridge camera w/ 40mm f3.5 Sonnar lens, wrist loop and

ROLLEI C26 computer flash for A26 only, w/charger

LESS CASE

Cat. No. 160 050
(04667)

Overleaf for more



Rollei A26/C26



ROLLEI A26



ROLLEI C26

Rollei A26—Additional Features

- When camera housing is closed, viewfinder, retractable lens and body release are covered and the CdS cell power switched-off.
- Wrist loop with threaded connection attaches to end of camera with milled knob or to end of A26/C26 (camera/flash) combination. (Accessory Neck Strap attaches the same way.)
- Exposure Value Range: EV 8.7 to EV 17.
- Filter size: screw in, M22 x 0.5.
- Battery for CdS meter cell: PX625 or equivalent.

ROLLEI A26 CAMERA only; w/wrist loop
Cat. No. 270 010
 (22512)

CASE, soft, for A26 camera
Cat. No. 970 460
 (10296)

ROLLEI C26 COMPUTER FLASH for A26 camera only w/charger
Cat. No. 120 010
 (22521)

COMBI CASE, soft, for A26/C26
Cat. No. 970 210
 (04668)

NECK STRAP for A26 or A26/C26
Cat. No. 270 030
 (05777)

Rollei C26—Computer Flash

This specially designed companion computer (automatic) flash for the A26 quickly attaches to the camera. When green "go" signal is no longer visible in camera viewfinder, C26 flash is attached and switched on and provides fully automatic flash exposures. Camera is automatically programmed to the correct working f stop for the ASA speed of film cartridge in camera.

- Guide No. in feet with 64ASA film: 56
- Computer (auto) range: 16" to 13½'
- Flash duration: 1/2500—1/30,000 sec.
- Built-in rechargeable Nicad: 40 flashes/chg.
- Recycling time: 10 sec., approx.
- Daylight balanced to 5500°K
- Light angle: Full and even over entire format
- Sensor angle: 15°
- Weight: only 5¼ ounces

Flash shooting with various films provides for automatically set f/stop and shutter speed when C26 computer flash is switched-on; for example:

ASA FILM	APERTURE	SHUTTER
50	f/4	1/30 sec.
100	f/5.6	1/60 sec.
200	f/8	1/60 to 1/125 sec.
400	f/11	1/250

‡ Actual exposure determined by computer flash duration: 1/2,500-1/30,000 sec.

←
 See Page 17