

YASHICA TL ELECTRO-X ITS SINGLE LENS REFLEX CAMERA

FEATURES

LENS: Auto Yashinon-DX 50mm f/1.4 7-elements lens; stops down to f/16; f/1.7 lens is also available.

SHUTTER: Electrically operated metal focal plane shutter with speed from SLOW (about two seconds) to 1/1000 sec., in-between shutter speeds settings also possible; B, self-timer, X sync. at the direct contact shoe and the side of the camera, and FP-X sync.

EXPOSURE CONTROL: Thru-the-Lens light measuring system with IC computer and Electronic Exposure Read-out; over/under-exposure indicator arrows suggest exposure correction; ASA 25-800 (DIN 15-30); 6V silver oxide battery (Eveready No. 544 or equivalent) powers the exposure control system and shutter.

VIEWFINDER: Reflex viewfinder with microprism focusing spot, ground-glass collar for depth-of-field analysis; focusing from 0.5 meter (1 ft. 6 inches) to infinity.

OTHER FEATURES: Battery Check, Mirror Lock, Direct Contact Shoe, Automatic Resetting Exposure Counter, Eye-cup with provision to mount a prescription lens of

18mm diameter, Multi-slot Take-up Spool for easy and accurate loading.

LENS SHADE: 57mm slip-on type for f/1.4 lens. 54mm slip-on type for f/1.7 lens.

FILTER: 55mm screw-in type for f/1.4 lens. 52mm screw-in type for f/1.7 lens.

DIMENSIONS: 151 x 96 x 96.4mm (with f/1.4 lens). 151 x 93.7 x 96.4mm (with f/1.7 lens).

WEIGHT: 1,050 grams. (with f/1.4 lens) 37 ounces. 970 grams. (with f/1.7 lens) 34 ounces.

AVAILABLE IN THE FOLLOWING MODELS:

	CODE NO.
TL-X ITS Black and Case — f/1.2	91054
f/1.7	91052
f/1.4	91053
TL-X Chrome and Case — f/1.2	91084
f/1.7	91082
f/1.4	91083

ACCESSORIES FOR USE WITH YASHICA SLR'S:

EXTENSION BELLOWS Code No. 91672

A deluxe bellows highly effective for extreme close-ups and macro-photography. Magnification is up to 2.4X the actual size of subject.

EXTENSION TUBE SET (4) Code No. 91671

A set of 4 tubes which can be used singly or in any combination for any degree of magnification up to maximum.

MICROSCOPE ADAPTER Code No. 91664

A must for microphotography, fits any Yashica screw-thread SLR and other cameras with same mount.

RIGHT-ANGLE VIEWFINDER Code No. 91167

Slips onto the camera eyepiece. Features an eyesight correction ring and a full 180° swing.


COPY STAND Code No. 91830

Camera mounts on pantograph arm for photographing of documents, etc. Height adjustment to desired magnification ratio.

SLIDE COPIER Code No. 91675

A convenient accessory when used in conjunction with bellows and standard lens, permitting duplication of slides.

YASHICA TL-SUPER SINGLE LENS REFLEX CAMERA

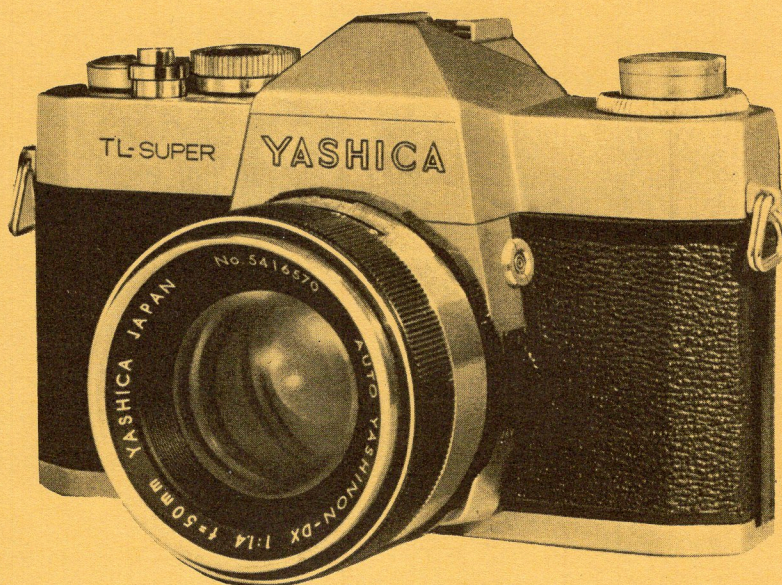

TOP-LEVEL SYSTEM SLR WITH THRU-THE-LENS CdS METERING

Two CdS sensors located on both sides of the viewfinder eyepiece within the pentaprism housing take average reading of light transmitted through the lens at stopped-down aperture.

LENS: Auto Yashinon-DX 50mm f/1.4 or f/1.7. 6 elements in 5 groups (f/1.7); 7 elements in 6 groups (f/1.4). Unique amber-magenta combination coating and perfect flare compensation for edge-to-edge sharpness and ideal color reproduction even in difficult light. Aperture range from f/1.4 (f/1.7) to f/16. Depth-of-field preview bar. Screw-thread mount.

SHUTTER: Focal plane shutter. Speeds from 1 to 1/1000 sec., and B. Built-in self-timer. Automatic FP-X sync. selector.

FOCUSING: Microprism focusing. Minimum focusing range 1.75 feet (0.5 meter) with Auto Yashinon-DX 50mm normal lens. Through-the-lens reflex viewfinder with Fresnel-backed screen for corner-to-corner brightness, ground-glass collar for depth-of-field analysis.

EXPOSURE CONTROL: Thru-the-Lens CdS metering system. Switch located beside the lens mount activates meter and sets diaphragm for manual operation. Correct exposure set by centering meter needle seen through the finder. ASA range from 25 to 800 (DIN 15-30). Operates on 1.5V silver oxide battery (Eveready S-76-E or equivalent).


AVAILABLE IN THE FOLLOWING MODELS:

	CODE NO.
TL-SUPER and Case — f/1.7	91092
f/1.4	91093


YASHICA SLR ACCESSORIES MAY BE USED WITH ALL YASHICA SLR MODELS.

YASHINON INTERCHANGEABLE LENSES

	21mm	28mm	35mm	MACRO 60mm	135mm	200mm
Model	Yashinon-DX	Auto Yashinon-DX	Auto Yashinon-DX	Macro Yashinon	Auto Yashinon-DX	Auto Yashinon-DX
Aperture	f/3.3-f/16	f/2.8-f/16 with click half-stops	f/2.8-f/16 with click half-stops	f/2.8-f/22	f/2.8-f/22 with click half-stops	f/4-f/22 with click half-stops
Diaphragm	Manual	Automatic	Automatic	Preset	Automatic	Automatic
Angle of View	92°	75°	63°	40°	18°	12° 20'
Minimum Focus	0.8m	0.8m	0.4m	0.235m	1.5m	4.5m
Code No.	91627	91628	91621	91600	91622	91624

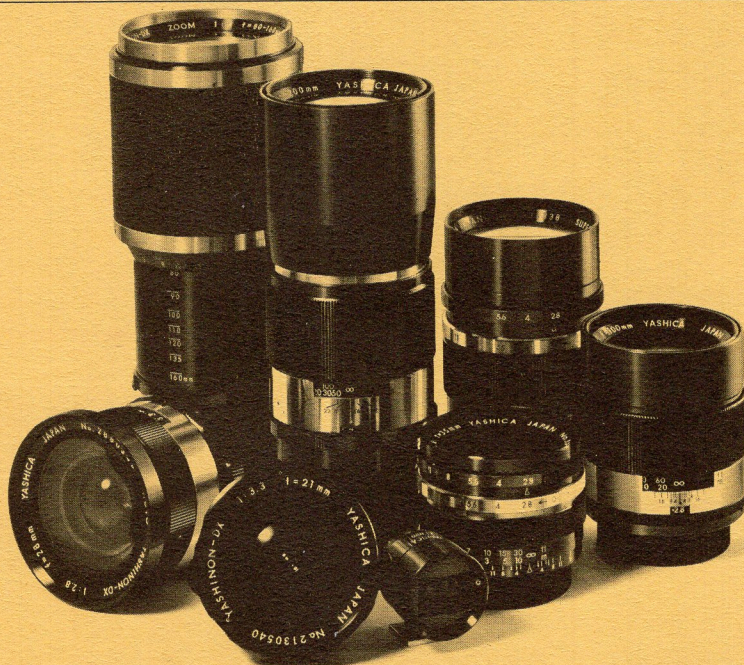

	300mm	600mm	800mm	ZOOM 45-135mm	ZOOM 75-230mm
Model	Auto Yashinon-DX	Super Yashinon	Super Yashinon	Auto Yashinon Zoom	Auto Yashinon Zoom
Aperture	f/5.6-f/22	f/8-f/32	f/8-f/32	f/3.5-f/16	f/4.5-f/22
Diaphragm	Automatic	Preset	Preset	Automatic	Automatic
Angle of View	8° 10'	4°	3°	51° 20' 18° 12'	32° 22' 10° 46'
Minimum Focus	4.5m	13m	25m	1.9m	2.5m
Code No.	91625	91607	91608	91619	91611

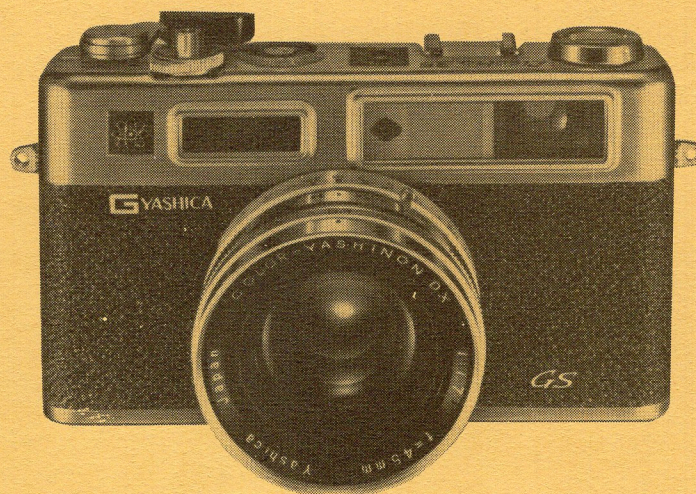

YASHICA ELECTRO 35 GS CAMERA

Code No. 91035

Automatic and electronic. The perfectly co-ordinated team-work of the Electronic Brain and Electronic Shutter is performed with computer-like precision. No more exposure worries—exposure setting is automatic. Ideal for shooting at any occasion in any light. In chrome finish. Includes carrying case.

FEATURES

LENS: COLOR-YASHINON DX f/1.7 45mm lens; stops down to f/16.

SHUTTER: Electronic shutter with speeds from 30 seconds to 1/500 sec., Self-timer, Bulb and X sync.

EXPOSURE CONTROL: Electronic Brain coupled to CdS sensor and electronic shutter sets perfect exposure automatically.

VIEWFINDER: Bright range/viewfinder with automatic parallax correction frame; exposure warning arrows visible in the viewfinder and on top of the camera suggest the use of a tripod or an ND filter.

OTHER FEATURES: Three exposure symbols, battery check lamp visible in the exposure counter window, ASA range from 25 to 1000 (DIN 15-31), shutter lock lever, "multi-slot" take-up spool for easy and accurate film loading.

POWER SOURCE: 5.6V mercury battery (Eveready E164 or equivalent).

LENS SHADE: 57mm slip-on type **Filter** 55mm screw-in type.

DIMENSIONS: 140 x 84 x 73.5mm (5½ x 3⅝ x 2⅞ in.)

WEIGHT: 750 grams (1.65 lbs.)

BATTERY: Mallory TR-164 (PX-132) or equivalent.

YASHICA ELECTRO 35 GS KIT


Code No. 91037

To enhance and extend the scope of your photography. KIT comprises camera; two auxiliary lenses (telephoto and wide-angle) and exclusive viewfinder; two filters (1A and 80B); Grip/Tripod ST-7; lens shade; cable release and soft case—all neatly packed in black carrying case.

ELECTRO 35 ACCESSORY KIT: Same as above less camera and case. Code No. 91213.

ELECTRO 35 AUXILIARY LENS SET: Includes wide angle and telephoto lens attachments.
Reduces focal length to 37.7mm and extends standard lens to 58.4mm respectively.
Code No. 91215.

ELECTRO 35 CLOSE-UP LENS: "Auto-up", permits close-ups from 18" to 32" approx. Code No. 91214.

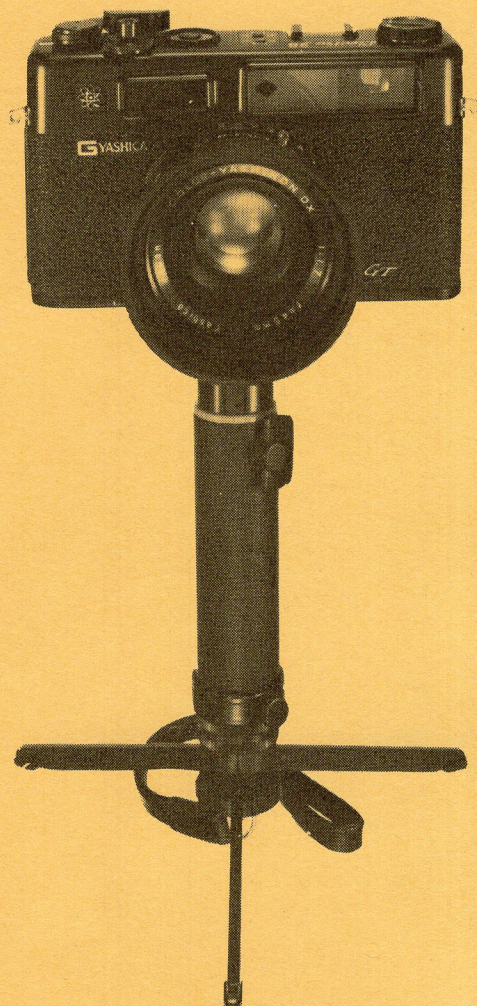

YASHICA ELECTRO 35 GTS CAMERA

Code No. 91034

The ELECTRO 35GTS comes in totally black finish, complete with a handy Grip/Tripod affording multiple uses and a rubber Lens Shade. Includes carrying case.

The standard GS model has satin-chrome deck, base and lens barrel.

FEATURES

LENS: COLOR-YASHINON DX f/1.7 45mm lens; stops down to f/16.

SHUTTER: Electronic shutter with speeds from 30 seconds to 1/500 sec., Self-timer, Bulb and X sync.

EXPOSURE CONTROL: Electronic Brain coupled to CdS sensor and electronic shutter sets perfect exposure automatically.

VIEWFINDER: Bright range/viewfinder with automatic parallax correction frame; exposure warning arrows visible in the viewfinder and on top of the camera suggest the use of a tripod or an ND filter.

OTHER FEATURES: Three exposure symbols, battery check lamp visible in the exposure counter window, ASA range from 25 to 1000 (DIN 15-31), shutter lock lever, "multi-slot" take-up spool for easy and accurate film loading.

POWER SOURCE: 5.6V mercury battery (Eveready E164 or equivalent.)

LENS SHADE: 57mm slip-on type **Filter** 55mm screw-in type.

DIMENSIONS: 140 x 84 x 73.5mm (5½ x 3⅝ x 2⅞ in.)

WEIGHT: 750 grams (1.65 lbs.)

BATTERY: Mallory T-164 (PX-132) or equivalent.

ELECTRO 35 ACCESSORIES MAY BE USED WITH THE GTS MODEL ALSO.

YASHICA ELECTRO 35 CC CAMERA Code No. 91029


Compact, fully automatic electronic camera with extra-wide 35mm lens for wide coverage. Ideal for day and night photography—without flash. Black finish. Includes carrying case.

**FEATURES**

- Ultra-fast Color Yashinon-DX f/1.8 wide angle lens.
- Exposure-indicator arrows.
- Automatic exposure setting.
- Built-in self timer, X sync.
- Battery check lamp incorporated in exposure counter.
- Shutter speed automatically set to 1/30 sec. when PC cord is plugged in.
- Electronic shutter with an infinite range of speeds from 8 seconds to 1/250 sec.
- Above the lens CdS sensor.
- Filter size: 52mm screw-in type.
- Lens shade size: 54mm slip-on type.
- Aperture range: f/1.8 to f/16.
- Sensitivity range from EV minus 1 to EV 16 at ASA 100.
- ASA range from 25 to 500.
- Battery: Mallory PX-28 or equivalent.

YASHICA LYNX-14E 35mm CAMERA

Code No. 91078

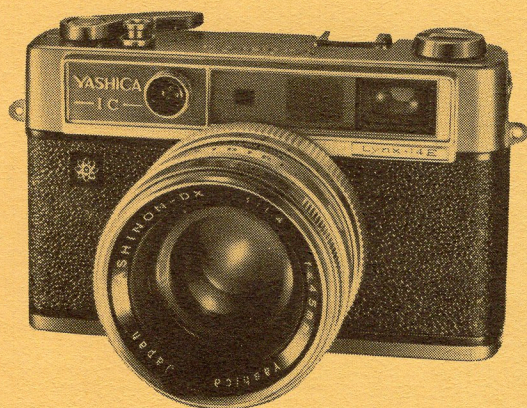


Electronic IC Exposure Readout System for extra precision and ease in exposure control with exposure indicator signals in the viewfinder. Added resistance to shock. Ultra-fast and extra-sharp f/1.4 lens assures superb results in both color and B/W photography in available light. Includes carrying case.

- Filter Size: 58mm Screw-in type.
- Lens Shade Size: 60mm Slip-on type.
- Yashinon DX 45mm f/1.4
- Aperture range f/1.4 to f/16
- Electronic IC readout system and CdS sensor
- Over/under indicator lamps visible in the finder.
- ASA range from 10-800
- Built-in self timer
- Operates on 2 Mallory RM640R batteries
- Shutter speeds to 1/500 sec.

YASHICA LYNX-5000E 35mm CAMERA

Code No. 91077

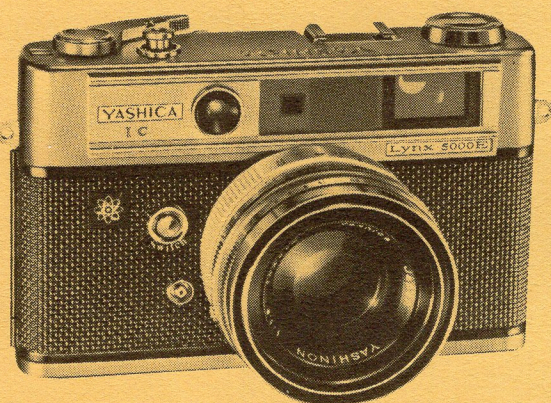

Unique Electronic Exposure Control System for accurate and easy exposure control. Offers a wide selection of shutter speeds/aperture combinations, maintaining the same light value. Ultra-sharp f/1.8 lens and speeds to 1/1000 sec. — fastest speed in this class. Includes carrying case.


- Filter Size: 46mm Screw-in type.
- Lens Shade Size: 54mm Slip-on type.
- Yashinon DX 45mm f/1.8
- Shutter speeds to 1/1000 sec.
- All other specifications identical to Lynx 14E.
- Batteries: 2 Mallory PX-640 or equivalent.

YASHICA MINISTER-D 35mm CAMERA

Code No. 91079

Backlighted pictures are the most difficult to take, but with the fabulous CdS meter, you automatically get "compensated" readings to let you set proper EV on control ring. Absolutely perfect exposure under ordinary light conditions, too. Includes carrying case.

- Yashinon f/2.8 45mm lens.
- Shutter speeds from 1 to 1/500 sec.
- Filter Size: 46mm Screw-in type.
- Lens Shade Size: 48mm Slip-on type.
- Unique CdS meter automatically integrates low and highlight areas for perfect "average" exposure settings.
- Coupled Rangefinder combined with Viewfinder.
- M-X synchronization.
- Self timer, and auto reset film counter.
- Mallory PX-13 battery or equivalent.

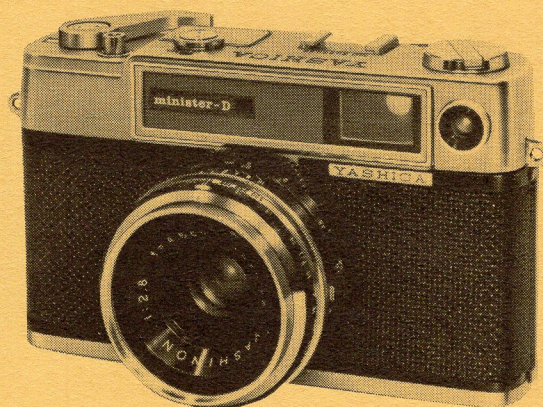


YASHICA YJ 35mm CAMERA KIT

Code No. 91075

Lightweight and easy-to-handle, the YJ has a fast f/2.8 lens and a flash synchronization with shutter speeds to 1/300 sec. Bright coupled rangefinder assures easy, accurate focusing under any situation. Available in complete kit with BC flash gun for AG bulbs and genuine leather field case. Ideal equipment for family use.

- Yashinon f/2.8 45mm lens.
- X sync.
- Self-timer.
- Shutter speeds from 1/25 to 1/300 sec., Bulb.
- Single stroke film advance.
- Filter Size: 46mm Screw-in type.
- Lens Shade Size: 48mm Slip-on type.
- Viewfinder/Rangefinder has bright frame and parallax markings.
- 4 Mallory MN-1500 batteries or equivalent.

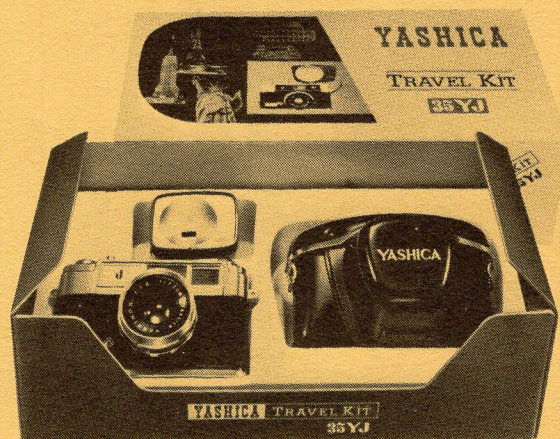

FEATURES

LENS: (SUPER-800 ELECTRO) Yashinon-DX Electric Zoom 7.5-60mm f/1.6, 15 elements in 12 groups.

(SUPER-600 ELECTRO) Yashinon-DX Electric Zoom 8-48mm f/1.8, 12 elements in 10 groups; stops down to f/32; microprism focusing from 1 meter (3.3 feet) to infinity.

ZOOMING: (SUPER-800 ELECTRO) Push-button electric zooming and manual zooming; (SUPER-600 ELECTRO) push-button zooming only.

VIEWFINDER: Thru-the-Lens reflex viewfinder with eye-sight correction; under-exposure warning signal; automatic film END mark; exposure indicator.

EXPOSURE CONTROL: Servomatic Thru-the-Lens exposure control; activator switch incorporated in the trigger release; auto setting of film speeds (ASA25-400) with drop-in load of Super-8 film cartridge; manual spotlight/backlight compensation control.



YASHICA SUPER-600E SUPER 8 MOVIE CAMERA

Code No. 91049

Same as SUPER-800E but with 6-to-1 power ZOOM and f/1.8 lens. Includes Grip.

YASHICA SUPER-800E SUPER 8 MOVIE CAMERA

Code No. 91048

Powerful ZOOM to bring distant subjects 8 times closer for dynamic effects on your screen. Thru-the-lens Electronic Exposure Control System powered by a Servo-motor for automatic exposure setting. Includes Grip.



FILMING SPEEDS: 12, 18 and 24 fps. and single frame exposure.

POWER SOURCE: Four 1.5V AA-size batteries for film drive, exposure control and zooming.

OTHER FEATURES: Built-in type 85A filter, film run indicator, battery checker, automatic resetting footage counter, continuous run, remote control socket, movie-light slot.

YASHICA ELECTRO-8 LD-6 SUPER 8 MOVIE CAMERA

Code No. 91050

**FEATURES:****6X ZOOM LENS**

- Yashinon-DX Electric Zoom Lens 8-48mm f/1.8, composed of 12 elements in 10 groups.
- Angle of view 47.20'-8.20'.
- Fully automatic zooming system. (TELE WIDE push-button zooming).
- Provision for manual zoom.

VIEWFINDER

- SLR type with provision for eyesight adjustment.
- With microsplit.
- Under exposure WARNING LAMP, Film END and lap-dissolving (GREEN LIGHT) signals visible in the viewfinder.

FOCUSING

- Microsplit type.
- Distance scale from 3.5 feet to infinity.

FILMING SPEEDS

- 18, 24, 36 frames per second plus single frame. (fully coupled to the exposure control system)

FILM DRIVE

- Electric motor film drive for Super-8 Film cartridge. Complete with eye cup, filter key, remote controller, six penlight batteries, special soft hood (54mm).

DIMENSIONS: 68mm x 185mm x 210mm.**WEIGHT:** 1,450 g., 3 lbs.**EXPOSURE SYSTEM**

- Through-the-lens CdS metering by the use of servo motor.
- Fully automatic lens diaphragm. Automatic film speed setting.
- Measuring range EV 9-21.
- ASA film speed range:


Artofocal light	40, 64, 100, 160, 250, 400
Natural light	25, 40, 64, 100, 250
- Incorporates exposure control dial for backlight and spotlight shooting. (Adjustable half-stop and one-stop lens diaphragm)
- Servo motor powered by the same batteries as film drive.

Other Features:

- With LAP-DISSOLVING DEVICE (fully automatic). (Provision for film backwind by about 54 frames.)
- Incorporates fade device.
- Provision for continuous run.
- Built-in Type 85A filter.
- Remote controller.
- Film type indicator window.
- Release lock.
- Movie light slot. (Kodak type)
- Automatic resetting footage mounter. (With meter and feet scaled.)
- Fixed hand grip. (six batteries are loaded in grip)
- Filter size 52mm. (screw-in type)

YASHICA SUPER-50N SUPER 8 MOVIE CAMERA

Code No. 91047

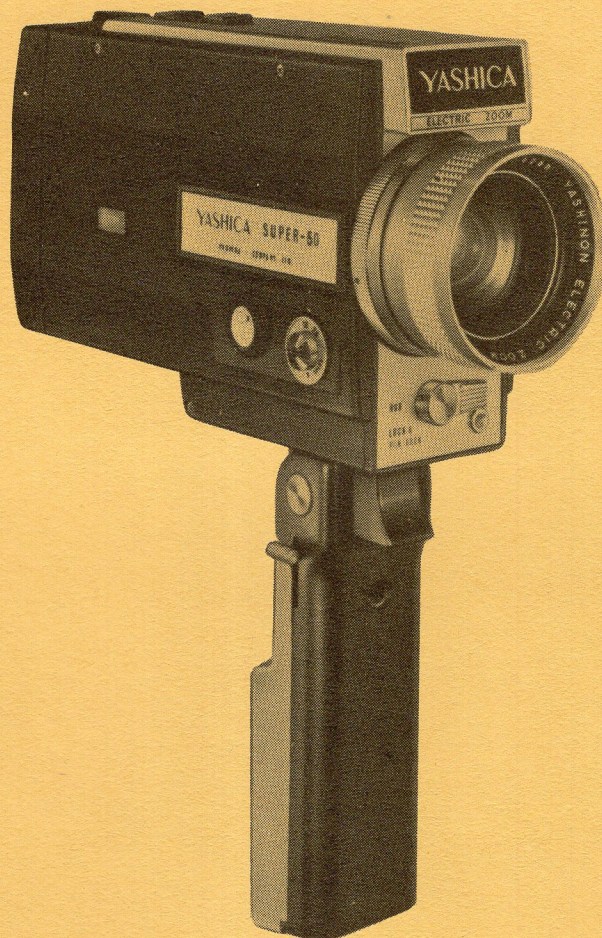

Low-priced 5-to-1 power zoom movie camera with accurate thru-the-lens exposure control. Yashinon Electric Zoom f/1.8 lens, 2 filming speeds, remote control, folding hand grip housing batteries. Includes Grip.

FEATURES

LENS: Yashinon Electric Zoom 8-40mm f/1.8 lens; 12 elements in 11 groups.

VIEWFINDER: Thru-the-Lens reflex viewfinder with eye-sight correction; Focusing by eye-measurement of the distance.

EXPOSURE CONTROL: Thru-the-Lens CdS exposure control; the aperture in use is shown in the viewfinder; over- and under-exposure warning indicators; power source (Mallory PX13B, National H-D or equivalent); meter switch; manual aperture setting also available.

FILMING SPEED: 18, 24 fps. and single-frame exposure; film drive by four AA-size batteries.

OTHER FEATURES: Battery Tester, Footage Counter, Remote Control Socket, Filter Control Dial, Film Type Indicator Window, Movie-light Slot.

DIMENSIONS: 56 x 122 x 193mm

WEIGHT: 1,160 grams, 33 ounces.

YASHICA SUPER 40K SUPER 8 MOVIE CAMERA

Code No. 91043

**FEATURES**

LENS: f/1.8 9mm to 36mm Auto Zoom and Manual Zoom.

FINDER: Through-the-lens system, and under-and-over warning visible in the finder.

FOCUSING: From 4 ft. to infinity.

EXPOSURE: CdS electric eye system through-the-lens.

ASA RANGE: 25-160.

BATTERY FOR EXPOSURE: One Mercury Battery 1.3 volts.

SPEED: 18 F.P.S.

FILM ADVANCE: Motor Drive—two penlite batteries 1.5 volts each.

GRIP: Fold-Down System.


FILTER DIAMETER: 46mm Screw-In-Type.

WEIGHT AND SIZE: 1.87 lbs. and 186 by 184 by 53mm.

COMPLETE WITH: Eye Cap—Filter Key two pcs. of penlite batteries and one mercury battery.

YASHICA 8P3-RS DUAL 8 PROJECTOR

Code No. 91406

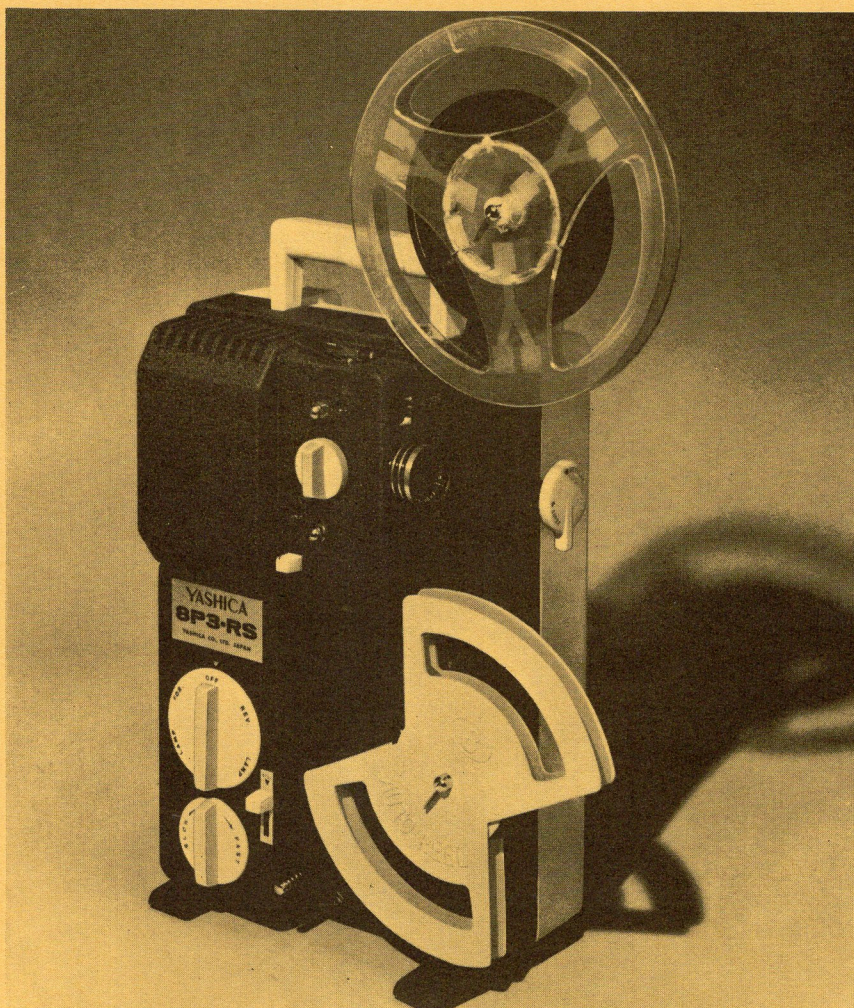

DUAL-FORMAT MOVIE PROJECTOR WITH AUTOMATIC FILM THREADING

Offers fully automatic reel-to-reel film threading with either Super-8 or Regular 8 films. Accommodates up to 400-foot reels for long, uninterrupted home movie performance.

FEATURES

LENS: Yashinon f/1.5 20mm-32mm zoom. Helicoid focusing mount. Zooming through manipulation of knob.

FILM THREADING: Automatic film threading all the way up to take-up reel.

REEL CAPACITY: Up to 400 ft.

PROJECTION CONTROL: Forward, reverse and still projection.

PROJECTION SPEED: Continuously variable through manipulation of speed regulator knob.


PROJECTION LAMP: 8V 50W lamp (Philips 13113/04 or equivalent).

OTHER FEATURES

- Universal voltage selector for use on both 110V and 240V ranges.
- Film trimmer.
- Film type selector.
- Framing lever.
- Loopsetters.
- Size: 307 x 208 x 117mm (12.07 x 8.19 x 4.6 in.)
- Weight: 4.6kg (10.14 lbs.)
- Standard accessories include cover, auto reel, cleaning brush.

YASHICA 8PE-DUAL EDITOR

Code No. 91401

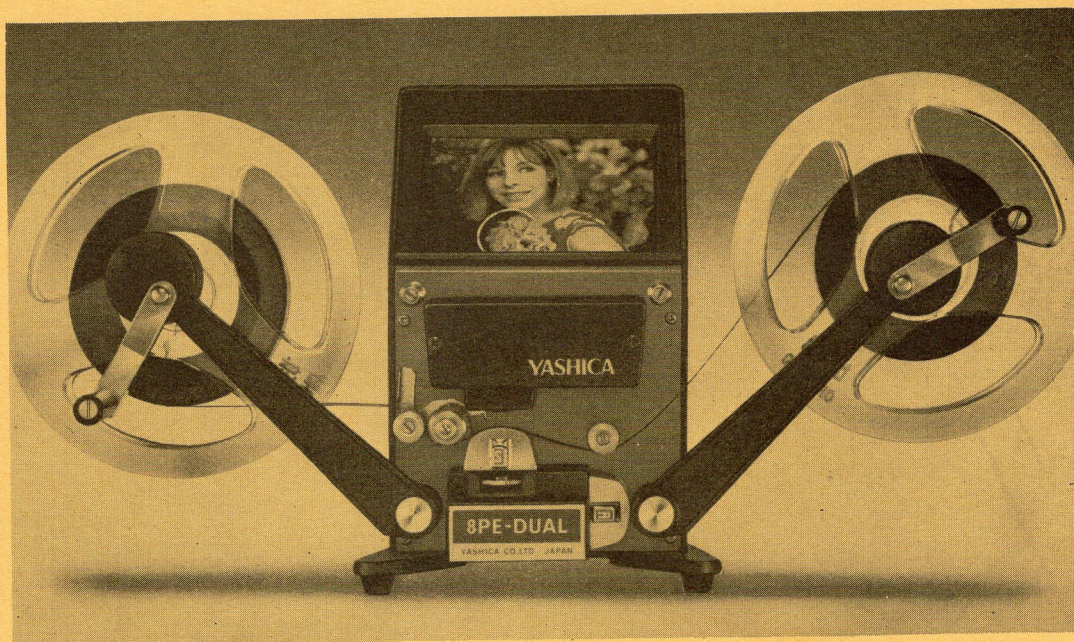

DUAL-FORMAT EDITOR FOR SMOOTH, PLEASURE-PACKED ACTION VIEWING AND FILM EDITING

Giant screen, full 400-foot reel capacity, plus efficient interchangeable aperture plate block for format adjustment assure perfect, flicker-free viewing of Super-8 and Regular 8 films.

FEATURES

SCREEN SIZE: 100mm x 70mm (4" x 2³/₄"), Fresnel-backed for corner-to-corner brightness.

FORMAT ADJUSTMENT: Installation of Super-8 or Regular 8 aperture plate block automatically secures optical alignment and brings the required sprocket wheel to operating position.

LIGHT SOURCE: 6V 10W single contact automobile lamp.

REEL CAPACITY: Up to 400 ft.

VOLTAGE ADJUSTMENT: Built-in voltage selector with three-way settings at 115V, 220V and 240V.

OTHER FEATURES: 3:2 ratio gear on take-up and 2:3 on rewind. Sturdy die-cast foldaway reel arms. Film market. Frame and focus adjustment.


SIZE: 160 x 160 x 210mm (6¹/₂ x 6¹/₂ x 8¹/₂ inches)

WEIGHT: 2.3Kgs. (4.7 lbs.)

YASHICA ATORON ELECTRO CAMERA KIT

Code No. 91030

A fully automatic ultra-miniature electronic camera with IC computer for automatic exposure setting, precision and maximum reliability under all light conditions. Complete with flash unit, right-angle viewfinder, chain strap, carrying case and lens cap. The ideal gift.

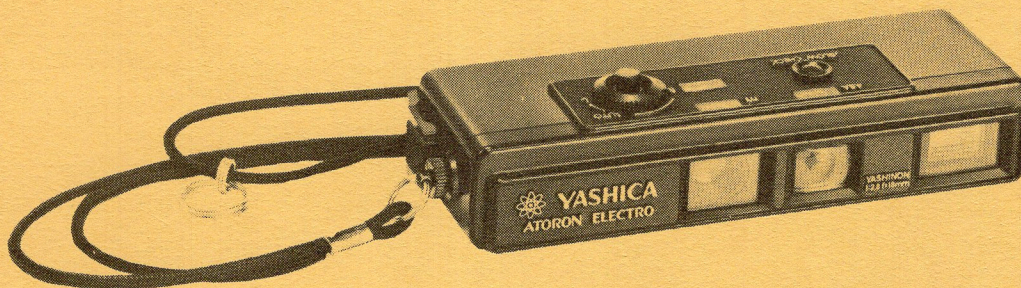

FEATURES

LENS: Yashinon-DX f/2.8 18mm focusing type. The Yashinon-DX f/2.8 18mm lens is computer-designed specifically for the ATORON ELECTRO. It ensures exceptionally sharp images of subjects at all ranges, both in color and B&W.

SHUTTER: Electronic programmed shutter.

EXPOSURE CONTROL: Fully automatic electronic exposure system with IC brain; EV 0 to EV 16; "Slow" check button; three-way settings at "Auto" and lock, works on silver oxide battery (Eveready 544 or equivalent).

FILM ADVANCE: Pull lever advances exposed frame, counts exposure, charges shutter.


OTHER FEATURES: Albada finder with bright trimming frame, automatic parallax compensation, auto resetting exposure counter.

DIMENSIONS: 102 x 20 x 38mm.

WEIGHT: 140 grams, 4½ ounces.

BATTERY: Mallory PX-28 or equivalent.

ATORON ELECTRO Set in an attractive gift package contains the ATORON ELECTRO camera, right-angle viewfinder, flash unit, chain strap, carrying case, and lens cap.

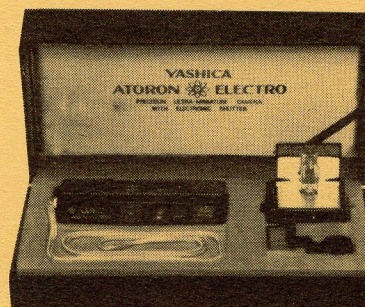

Accessories and Film available for use with the ATORON ELECTRO Camera are listed on page 108.

YASHICA MAT-124G TLR CAMERA Code No. 91020

Professional quality TLR camera for 24-exposure 220 film and 12-exposure standard 120 film. In black finish. Includes carrying case.

- Complete all black finish
- Specially designed pressure plate for 120 or 220 film
- Yashinon 80mm f/3.5 taking, f/2.8 viewing lens
- Shutter speeds from 1 to 1/500
- M-X sync, coupled CdS meter, meter switch coupled to focusing hood
- Ideal for color and black and white photography
- Filter Size: 30mm bayonet type
- Lens Shade Size: 30mm bayonet type
- Battery: Mallory PX-13 or equivalent




MAT-124G

YASHICA MAT TLR CAMERA Code No. 91009

Standard equipment for many press photographers and other professionals. Includes carrying case.

- Yashinon 80mm f/3.5 color corrected lens
- Shutter speeds from 1 to 1/500
- Self timer, M-X sync
- Fresnel focusing screen
- Fully automatic film transport sets shutter and prevents double exposure
- Filter Size: 30mm bayonet type
- Lens Shade Size: 30mm bayonet type

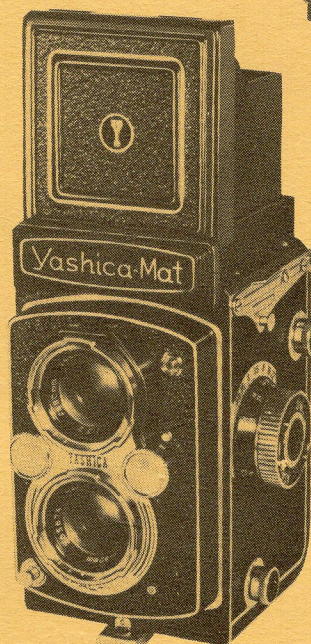


MAT

YASHICA D TLR CAMERA Code No. 91004

Budget-priced TLR, using standard 120 film, of the same reliable quality and rugged construction found in high-priced TLRs. The ideal "step-up" for those interested in developing their photographic ability. Includes carrying case.

- Yashikor 80mm f/3.5 lens
- Shutter speed from 1 to 1/500
- M-X sync, automatic exposure counter
- Fresnel lens focusing screen with pop-up magnifier
- Filter Size: 30mm bayonet type
- Lens Shade Size: 30mm bayonet type

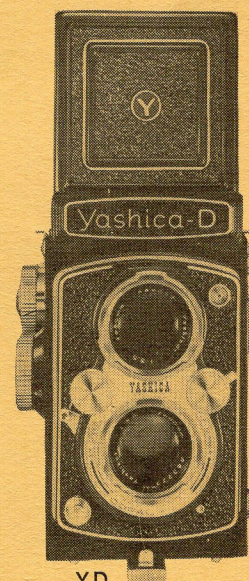

YD

YASHICA AUXILIARY WIDE ANGLE LENS FOR TLR

Code No. 91118

Converts the effective focal length of lens to 58.4mm, increasing the picture area by about 75%.

YASHICA AUXILIARY TELEPHOTO LENS FOR TLR

Code No. 91119


Increases the effective focal length of lens to about 113mm, providing image magnification of 1.5 times that of the 80mm lens.

YASHICA PHOTOGRAPHIC ACCESSORIES

For best results with Yashica cameras a wide range of Yashica accessories is available for amateurs and professionals.

35mm ACCESSORIES

	CODE NO.
Electro 35 Accessory Kit	91213
Electro 35 Aux. Lens Set	91215
Electro 35 Close-Up Lens	91214
ST-7 Grip/Tripod	91484




Bellows



Close-Up Lenses

SLR ACCESSORIES

	CODE NO.
Copy Stand	91830
Extension Bellows	91672
Slide Copier	91675
Auto Ext. Tube Set (3)	91670
Ext. Tube Set (4)	91671
Microscope Adapter	91664
Right Angle Viewfinder	91167
Magnifier	91674
CU Lenses 55 & 52mm plus 1 & 2

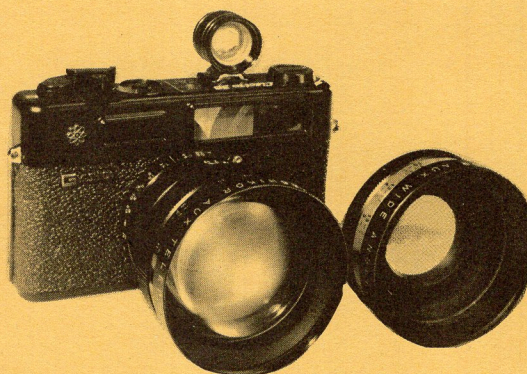


35mm Auxiliary Lens Set

TLR ACCESSORIES

	CODE NO.
Aux. WA Lens	91118
Aux. Tele Lens	91119
Hand Grip	91111
Lens Shade 30mm Bayonet	91117
Filters f/30mm Bayonet
CU Lens 30mm Bay. plus 1	91114
CU Lens 30mm Bay. plus 2	91115



Extension Tubes



Slide Copier

SUPER 8 MOVIE ACCESSORY

	CODE NO.
Y-71 Movie Case	91346

ELECTRONIC FLASH

	CODE NO.
Pro-50 DeLuxe	91249

New, compact, versatile electronic flash unit with easy to read exposure calculator dial.

- Hot shoe.
- Use horizontally or vertically.
- Flash duration 1/1000 sec.
- Guide No. 37/40 ASA 25, KII.
- AC or 3 AA batteries.
- 6000°K color temperature.
- Battery life 60 flashes (standard battery).



Pro-50 DX

ULTRAMINIATURE ATORON ELECTRO ACCESSORIES

	CODE NO.
Close-Up Lens Set	91458
Filter Set (Y2,80B,NDx4)	91456
Right Angle Finder	91457
Flash Gun	91453
Adapter for Tripod	91460
Chain	91454
Case	91330
Enl. Lens 21mm f/2.8	91452
ST-9 Tripod	91459
Plus-X Film (2-20)	91471
XT-Pan Film (2-20)	91474
Ektacolor-S Film (2-20)	91477
Unifilm f/Atoron	91475
Kodachrome II Film 16EE	91416
Plus-X Film for 16EE	91411
Unifilm for 16EE	91415
Plus-X for Y-16	91193
Kodachrome II for Y-16	91194

LENS ACCESSORIES

	CODE NO.
Lens Shade 46mm Slip-on	91673
Lens Shade 48mm Slip-on	91176
Lens Shade 54mm Slip-on	91166
Lens Shade 57mm Slip-on	91210
Lens Shade 60mm Slip-on	91446
Filters 46mm Screw-in
Filters 52mm Screw-in
Filters 55mm Screw-in
Filters 58mm Screw-in
Fly-D Filter 52mm	91135
Fly-D Filter 55mm	91195