

Nikon One-Touch

Product number:

1805

Type of camera:

Autofocus, compact camera with macro focus range and automatic flash backlight compensation (smart flash)

Picture format:

24mm x 36mm (standard 35mm format)

Lens:

Nikon 35mm f/2.8 lens; 4 elements in 3 groups

Filter:

46mm dia. threaded mount provided at front of lens

Shutter:

Programmed, electronic in-lens shutter

Viewfinder:

Bright-frame viewfinder; magnification 0.5x

Field of view:

Approximately 85% frame coverage at infinity

Viewfinder information:

Bright frame with parallax compensation marks, autofocus frame marks, display for correct focusing (green LED), flash-ready indicator (red LED); battery check and "too-near-subject" warning also provided

Focusing:

16-step, infrared, active autofocus system; 0.5m 17" to infinity

Focus memory:

By pressing the shutter release

Exposure metering:

Two CdS cells; one for the programmed, automatic exposure system and one for automatic flash backlight compensation (smart flash)

Metering range:

EV6.4 to EV17 (f/2.8 at 1/11 sec. to f/16 at 1/500 sec.) with ISO 100 film

Film speed setting:

Automatic for DX-coded films; set to ISO 100 for non-DX

Film speed range:

ISO 64 to 1600

Film loading/advance:

Auto film loading with film automatically advanced to first frame

Frame counter:

Additive type; resets when camera back is opened; counts backwards as film is being rewind

Film rewind:

Automatically at end of film roll; film rewind stop automatic as film leader leaves sprockets

Electronic flash:

Automatic functions are available, as follows:

- * Flash in case of insufficient light
 - * Flash dimmer for distances less than 0.7m (2.3 ft.)
 - * Flash backlight compensation
 - * Shutter locks until flash is fully charged
 - * Flash cancel button for photographs without flash
- Charging time about 3 sec.

Flash range:

0.45-4m (1.5-14.8 ft.), ISO 100 film

Self-timer:

Via self-timer; 10 sec. shutter release delay with indicator light

Battery check:

Approximately 5 years (ten 24-exposure rolls per year with 30% flash usage); shutter release locks when battery is exhausted

Power source:

Lithium battery pack (Duracell DL223A 6V or Panasonic BR-P2 6V)

Dimensions:

135.8mm (W) x 71.5 (H) x 48mm (D)
(5.3"x2.8"x1.9")



Optional accessories:

Pouch Case for Tele-Touch Deluxe/
One-Touch/Fun-Touch



Nikon Tele-Touch Deluxe

Nikon Tele-Touch Deluxe

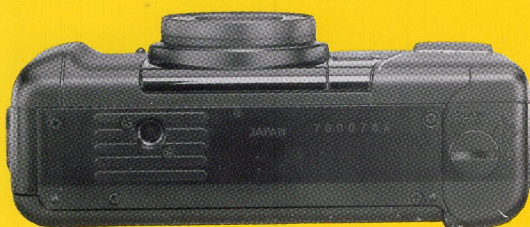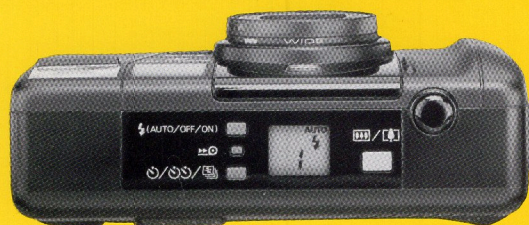

Product number:

1810

Type of camera:

Autofocus compact camera with wide-angle, telephoto and macro function, plus Advanced Smart Flash

Picture format:

24mm x 36mm (standard 35mm format)

Lens:

Wide—Nikon lens 35mm f/3.5; 4 elements in 3 groups
Tele—Nikon lens 70mm f/6.8; 8 elements in 6 groups

Lens cover:

Opens or closes automatically with the power switch

Filter:

Built-in soft-effect filter; 1 element in 1 group

Shooting distance:

0.69m to infinity
(2.3 ft. to infinity)

Film speed setting:

Automatically set to ISO 64, 100, 200, 400, 1000, 1600 for DX-coded film; Non-DX-coded films are automatically set at ISO 100

Shutter:

Programmed electronic shutter; also serves as diaphragm blades

Viewfinder:

Reverse-Galilean Albada-type bright-frame viewfinder; 0.42x (at W) or 0.79x (at T) magnification automatically selected and set by motor; approx. 85% (W) or 86.5% (T) frame coverage; -1 dioptre

Viewfinder information:

Picture frame marks, autofocus frame marks, parallax compensation frame marks, focus indicator LED (green), flash ready-light indicator LED (red)

Focusing:

Active autofocus system; lightly pressing shutter release button locks focus

Exposure metering:

Programmed auto exposure control:
EV6 to EV16 on "W"
EV7.9 to EV16 on "T"
(at ISO 100)

Film loading:

Film automatically advances to first frame when camera back is closed

Film advance:

Automatic, at 0.7 second per frame in continuous shooting mode

Film rewinding:

Automatic rewinding when end of film roll is reached; approx. 18 sec. per 24-exposure roll; stops automatically when film is rewound; mid-roll rewind button provided

Frame counter:

Additive type; automatically resets when camera back is opened; counts back while film is rewinding

Self timer:

Activated by self-timer/continuous shooting button and by depressing shutter release button; locks focus and exposure; 10-second delay with indicator lamp; two-shot self-timer possible; cancelable

Built-in flash:

Fire automatically if existing light is insufficient for normal shooting; ready-light; shutter locks if flash is not charged; recycling time approx. 1.8 sec.

LCD panel:

Film counter, battery power indicator, continuous shooting indicator, flash mode indicator and self-timer indicator appear on LCD panel

Battery life:

Approx. 25 rolls* of 24-exposure film w/50% flash

Power source:

Lithium battery pack (Duracell DL223A 6V or Panasonic BR-P2 6V)

Dimensions:

136mm (W) x 72mm (H) x 46.6mm (D)
(5.4" x 2.8" x 1.8")

Weight:

Approx. 310g (10.9 oz.) without batteries



Optional accessories:

Pouch Case for Tele-Touch Deluxe/
One-Touch/Fun-Touch

*With fresh battery pack at normal temperature (68°F/20°C).



Nikon Zoom-Touch 500

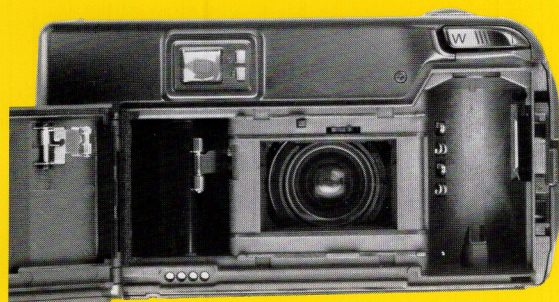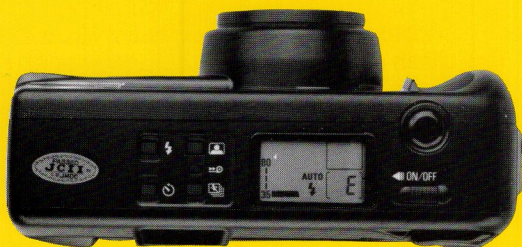

Product number:

1820

Type of camera:

35mm autofocus, compact camera with Nikon 35-80mm Zoom lens plus Advanced Smart Flash operation

Picture format:

24mm x 36mm (standard 35mm format)

Lens:

Nikon 35-80mm f/3.5-7.8 zoom lens with macro range; 9 elements in 7 groups; cover built into front of lens; cover opens and closes automatically with camera ON/OFF switch

Shutter:

Programmed, electronic in-lens shutter; shutter also serves as lens diaphragm blades

Viewfinder:

Reverse-Galilean, Albada-type viewfinder; 0.44X to 0.9X finder magnification across 35-80mm lens zoom range; approx. 80% frame coverage (infinity focus); -1 diopter

Viewfinder information:

Picture, autofocus and parallax compensation frame marks via bright-line display; two LEDs provided for "correct focus" (green) and flash "ready-light" (red) indication at viewfinder

Focusing:

Active, infrared autofocus system; range of 2.3 ft. (0.71m) to infinity; focus lock built into camera shutter release button

Auto exposure range:

Programmed automatic exposure control; EV 4 to EV 16 at 35mm setting (ISO 100); EV 6.2 to EV 16 at 80mm setting (ISO 100)

Film speed selection:

Automatically set to ISO 64, 100, 200, 400, 1000, or 1600 via DX-code; automatically set to ISO 100 for cartridges with no DX coding

Film loading:

Automatic motorized film loading with auto advance to first frame when back is closed

Film advance:

Automatic motorized film advance after each frame; up to approx. 1.7 frames per second firing rate in continuous firing mode

Film rewind:

Automatic motorized rewind when end of film is reached; approx. 18 sec. per 24-exposure roll; auto film stop when end of roll is reached; mid-roll rewind button provided

Film counter:

Additive-type via LCD panel; automatically resets when camera back is opened; counts in reverse as film rewinds

Self timer:

Selected via button and started with shutter release; ten second release delay as standard; delay variable from 5 to 30 sec. in 1 sec. increments; LED indicator flashes count-down; two-shot self timer function provided; focus/exposure lock during timer operation

Built-in electronic flash:

Equipped with Advanced Smart Flash; fires automatically if existing light is insufficient for



normal shooting or if subject is backlit; flash ready-light visible at viewfinder; flash zooms with lens focal length changes; auto shutter lock during charging; power rating of approx. GN 41 to 46 (in feet, ISO 100) across the 35mm to 80mm zoom range; flash recycling time approx. 3 sec.

LCD panel:

Display provided for film counter, battery power indicator, continuous shooting indicator, flash mode indicator, self-timer indicator, sequence zoom and step zoom shooting indicators, image size indicator, exposure compensation indicator and focal length scale

Power source:

One 6V lithium power pack (DL223A)

Battery performance:

Approx. 30 rolls of 24-exposure film with 50% flash operation

Dimensions (W x H x D):

136.8 x 73 x 57.8mm (5.4 x 2.9 x 2.3 in.)

Weight:

Approx. 360g (12.7 oz.), without battery

Nikon Zoom-Touch 500 Quartz Date

Product number:

1821

Type of camera:

Special version of Nikon Zoom-Touch 500 equipped with data back capable of imprinting date or time on film during exposure

Data Imprint functions:

"M/D/Y" (month/day/year) or "Hr./--/Min." (hour/ [blank] /minute) via MODE selector, cancellable; imprint via LED

Data back power source:

One 3V lithium battery (provided)

Dimensions (W x H x D):

136.8 x 73 x 61.3mm (5.4 x 2.9 x 2.4 in.)

Weight:

Approx. 370g (13 oz.), without batteries

Nikon Tele-Touch Deluxe Quartz Date

Product number:

1811

Type of camera:

Special version of Nikon Tele-Touch Deluxe equipped with data back capable of imprinting date or time on film during exposure

Data Imprint functions:

"M/D/Y" (month/day/year) or "Hr./---/Min." (hour/ [blank] /minute) via MODE selector, cancellable; imprint via LED

Data back power source:

One 3V lithium battery (provided)

Dimensions (W x H x D):



136 x 72 x 49.8mm (5.3 x 2.8 x 1.9 in.)

Weight:

Approx. 290g (10 oz.), without batteries



Nikon One-Touch 100

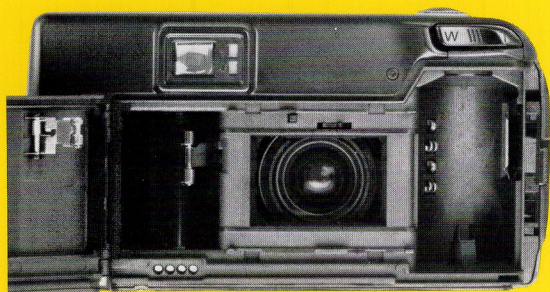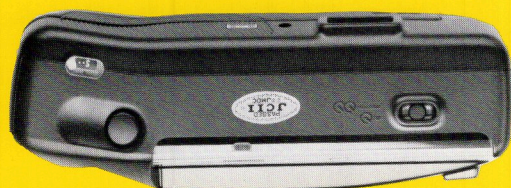

| | |
|-----------------------------------|--|
| Product number: | 1808 |
| Type of camera: | 35mm autofocus, compact camera |
| Picture format: | 24mm x 36mm (standard 35mm format) |
| Lens: | Nikon 35mm f/3.5; 4 elements in 3 groups; lens cover built into camera body; sliding Open/Close lever also serves as camera ON/OFF switch |
| Shutter: | Programmed, electronic in-lens shutter; shutter also serves as lens diaphragm blades |
| Viewfinder: | Reverse-Galilean, Albada-type viewfinder; 0.46X finder magnification; approx. 83% frame coverage (infinity focus); -1 diopter |
| Viewfinder Information: | Picture, autofocus and parallax compensation frame marks via bright-line display; two LEDs provided for "correct focus" (green) and flash "ready-light" (red) indication at viewfinder |
| Focusing: | Active, infrared autofocus system; range of 2.1 ft. (0.65m) to Infinity; focus lock built into camera shutter release button |
| Focus memory: | Selected via button in tandem with operation of shutter release; focus setting locked for approx. 30 sec.; operation cancellable |
| Auto exposure range: | Programmed, automatic exposure control via CdS sensor; EV 9 to EV 16 (ISO 100) |
| Film speed selection: | Automatically set to ISO 100, 200, 400, or 1000 via DX-code; automatically set to ISO 100 for cartridges with no DX coding |
| Film loading: | Automatic motorized film loading with auto advance to first frame after camera back is closed and shutter release button is pressed once |
| Film advance: | Automatic motorized film advance after each frame |
| Film rewind: | Automatic motorized rewind when end of film is reached; approx. 20 sec. per 24-exposure roll; auto film stop when end of roll is reached; mid-roll rewind button provided |
| Film counter: | Additive type; automatically resets when camera back is opened; counts in reverse as film rewinds |
| Self timer: | Selected via button and started with shutter release; ten second release delay as standard; LED indicator flashes count-down; two-shot self timer function provided; focus and exposure locked during timer operation; operation cancellable |
| Built-in electronic flash: | Flash fires automatically if existing light is |



Insufficient for normal shooting; flash ready-light visible at viewfinder; auto shutter lock during charging; power rating of approx. GN 30 (In feet, ISO 100); flash operation range of 0.65-3.5m (2.1-11.5 ft.), ISO 100; flash recycling time approx. 3.5 sec.

Power source:

Two 1.5V AA-type (penlight) batteries or one 3V lithium power pack (DL123A)

Battery performance:

Approx. 24 rolls of 24-exposure film with 50% flash operation using AA-type batteries or 30 rolls of 24exposure film with 50% flash operation using lithium power pack

Dimensions (W x H x D): 133 x 71.3 x 48.7mm (5.2 x 2.8 x 1.9 in.)


Weight:

Approx. 250g (8.8 oz.), without batteries

Camera case:

Nikon Soft Camera Case (P/N 690), optional


Nikon Action-Touch

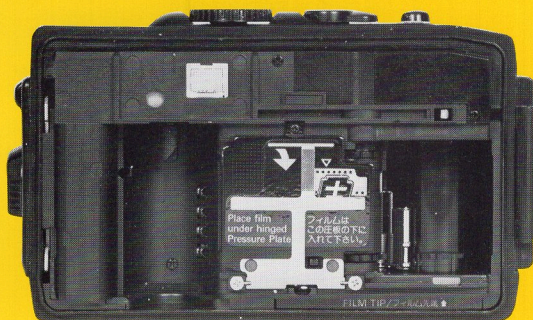

| | |
|--------------------------------|---|
| Product number: | 1840 |
| Type of camera: | All weather, autofocus, compact camera, watertight to a depth of 3m (10 ft.) |
| Picture format: | 24mm x 36mm (standard 35mm format) |
| Lens: | Nikon 35mm f/2.8 lens, 4 elements in 3 groups |
| Shutter: | Programmed, electronic in-lens shutter |
| Viewfinder: | Bright-frame viewfinder; 0.5x magnification |
| Field of view: | Approximately 85% frame coverage at infinity |
| Viewfinder information: | Bright frame with parallax compensation marks, autofocus frame marks, focus symbols and focus indicator needle; M for manual focusing; LED warning of insufficient light and "too-near-subject" warning also provided |
| Focusing: | Infrared, active autofocus system; 0.7m (2.2 ft) to infinity; four-step manual focusing via stepped selector |
| Focus memory: | By pressing the shutter release button |
| Exposure metering: | Lens-mounted CdS cell coupled to programmed, automatic exposure system |
| Metering range: | EV6 to EV17 (f/2.8 at 1/8 sec. to f/17.5 at 1/430 sec.) with ISO 100 film |
| Film speed setting: | Automatically for DX-coded films; set to ISO 100 for non-DX film |
| Film speed range: | ISO 50 to 1600 |
| Film loading/advance: | Auto film loading with film automatically advanced to first frame |
| Frame counter: | Additive type; resets when the camera back is opened |
| Film rewind: | Automatic after pressing rewind lever at base of camera; film rewind stop automatic as film leader leaves sprocket |
| Electronic flash: | Switched on by turning flash lever; LED flash prompt provided; shutter release button is blocked until flash fully charged and ready to fire |
| Flash range: | 0.7m to 3.6m (2.3ft to 10.8ft), ISO 100 film |
| Self-timer: | Electronic with 10 sec. exposure delay and audible signal |
| Battery capacity: | Approximately 100 rolls of 24-exposure film without flash; approximately 10 rolls of 24-exposure film with flash |
| Power source: | Two 1.5V AA-type (penlight) alkaline-manganese batteries (NiCd batteries not suitable) |
| Dimensions: | 134mm (W) x 81mm (H) x 48mm (D) (5.2" x 3.2" x 1.9") |
| Optional accessories: | CS-L35AW Semi-Soft Camera Case Pouch Case with Strap for Action-Touch |



Nikon Fun-Touch

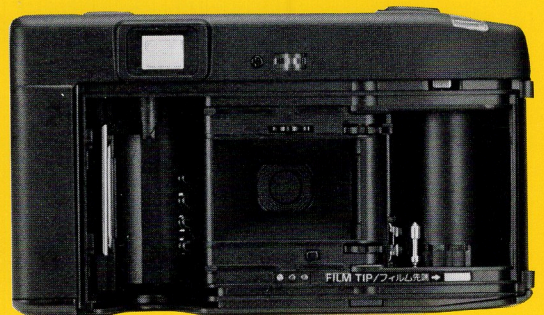

Product number:
Type of camera:
Picture format:
Lens:
Shutter:
Viewfinder:
Field of view:
Viewfinder information:

Focusing:

Focus memory:
Exposure metering:
Metering range:
Film speed setting:

Film speed range:
Film loading/advance:

Frame counter:

Film rewind:

Electronic flash:

Flash range:
Self-timer:


Battery check:
Battery capacity:

Power source:

Dimensions:

Optional accessories:

1807
 Autofocus, compact camera
 24mm x 36mm (standard 35mm format)
 Nikon 35mm f/3.5 lens; 4 elements in 3 groups
 Programmed, electronic in-lens shutter
 Bright-frame viewfinder; 0.46x magnification
 About 85% frame coverage at infinity
 Bright frame with parallax compensation marks, autofocus frame marks, display for correct focusing (green LED), flash-ready indicator (red LED); battery check
 Infrared, active autofocus system; 0.96m (2.7 ft.) to infinity
 By pressing the shutter release
 CdS cells; programmed automatic exposure control
 EV9 to EV16 (with ISO 100 film)
 Automatic for DX-coded films; set to ISO 100 for non-DX film
 ISO 64 to 1600
 Auto film loading with film automatically advanced to first frame
 Additive type; automatically resets when camera back is opened; counts backward during film rewind
 Automatically at end of film roll; film rewind stop as film leader leaves sprockets
 Automatic flash when light is insufficient; shutter locks until flash is fully charged
 0.96-3.6m (2.7 to 10.7 ft.) (with ISO 100 film)
 Via self-timer lever; 10 sec. shutter release delay with indicator light
 By LED in viewfinder
 Approximately 100 rolls of 24-exposure film without flash; approximately 10 rolls of 24-exposure film with flash
 Two 1.5V AA-type (penlight) alkaline-manganese batteries (NiCd batteries not usable)
 131mm (W) x 71mm (H) x 47mm (D)
 (5.1"x2.8"x1.9")
 Pouch Case for Tele-Touch Deluxe/One-Touch/Fun-Touch

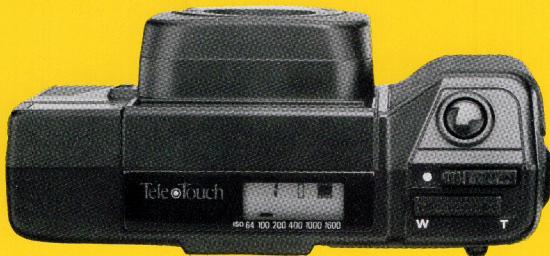

Nikon Tele-Touch

| | |
|--------------------------------|--|
| Product number: | 1803 |
| Type of camera: | Autofocus compact camera with wide-angle, telephoto and macro function |
| Picture format: | 24mm x 36mm (standard 35mm format) |
| Lens: | Wide-angle, Nikon 38mm f/3.5, 4 lenses in 6 groups; telephoto, Nikon 65mm f/5.6, 8 lenses in 6 groups |
| Shutter: | Programmed, electronic in-lens shutter |
| Viewfinder: | Bright-frame viewfinder; 0.45x magnification at W; 0.72x magnification at T |
| Field of view: | Approximately 83% frame coverage at infinity |
| Viewfinder information: | Bright frame with parallax compensation frame marks, autofocus frame marks, focus symbols and focus distance indicator needle |
| LCD monitor: | Indicates status of battery, film advance and film load check, frame counter and automatic flash |
| Focusing: | Stepless, infrared, active autofocus system; 0.4m (1.3 ft) to infinity at W, 1.3m (4.3 ft) to infinity at T |
| Focus memory: | By pressing the shutter release button |
| Audible warning signal: | Sounds in the following cases: shooting distance too close; film rewind complete; film improperly loaded; lens blocked on changing to T setting |
| Exposure metering: | Lens-mounted CdS cell coupled to programmed, automatic exposure system |
| Metering range: | EV6 to EV17 at W, EV7.4 to EV18.4 at T (with ISO 100 film) |
| Film speed setting: | Automatic for DX-coded films; set to ISO 100 for non-DX films |
| Film loading advance: | Auto film loading with film automatically advanced to first frame |
| Frame counter: | Additive type; resets when the camera back is opened; counts backward as film is rewound |
| Film rewind: | Automatically at end of roll |
| Electronic flash: | Built-in flash automatically pops up into the ready position when required; Shutter release blocked until flash is fully charged and ready to fire |
| Film rewind: | With rewind crank after rewind button is depressed |
| Flash range: | 0.4-5m (1.3-16 ft.) at W; 1.3-3m (4.3-9 ft.) at T (for ISO 100) |
| Self-timer: | Electronic with 10 sec. exposure delay and audible signal |
| Battery check: | Via LCD monitor panel |
| Battery capacity: | Approximately 80 rolls of 24-exposure film without flash; approximately 8 rolls of 24-exposure film with flash |
| Power source: | Two 1.5V AA-type (penlight) alkaline-manganese batteries and one lithium battery for LCD monitor panel |
| Dimensions: | 137mm (W) x 78mm (H) x 58mm (D) (5.3"x3.0"x2.3") |
| Weight: | Approximately 355g (12.4 oz.) without AA-type batteries mounted |
| Optional accessories: | CS-L35TW Semi-Soft Camera Case |