

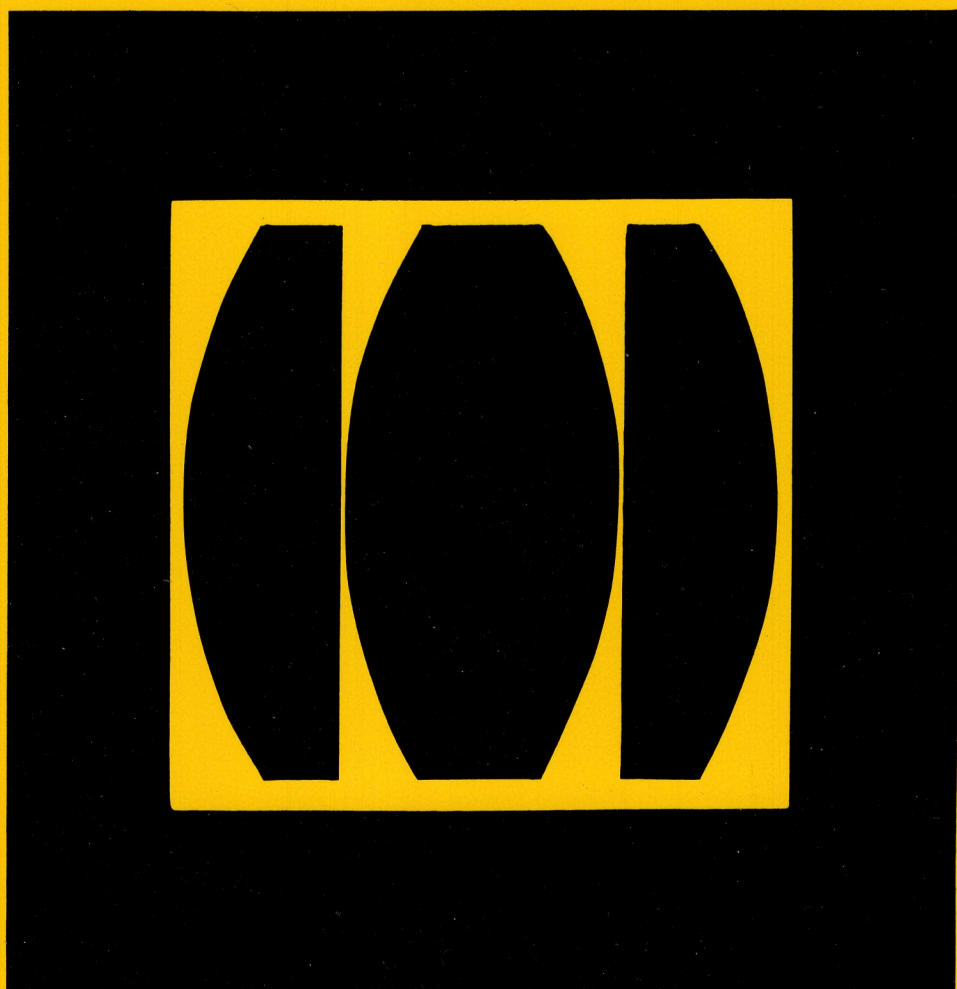


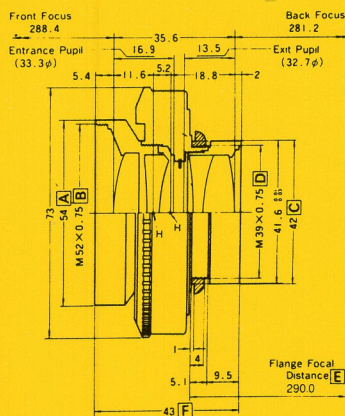



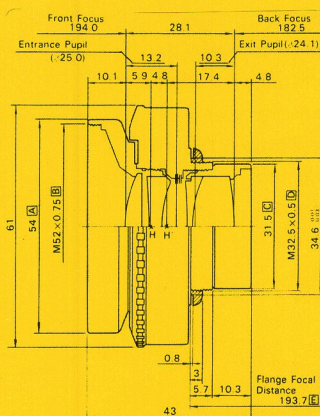


Nikkor-M 200mm f/8

Product number:	1322
Focal length:	200mm
Maximum aperture:	f/8
Optical construction:	4 elements in 3 groups
Aperture range:	f/8-f/64
Covering power (f/8):	45°
Covering power (f/22):	55°
Image circle (f/8):	166mm diameter
Image circle (f/22):	210mm diameter (5"x7")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	31.5mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	193.7mm
Overall length (F):	43mm (1.7")
Weight:	180g (6.3 oz.)

Nikkor-M 300mm f/9

Product number:	1321
Focal length:	300mm
Maximum aperture:	f/9
Optical construction:	4 elements in 3 groups
Aperture range:	f/9-f/128
Covering power (f/9):	55°
Covering power (f/22):	57°
Image circle (f/9):	312mm diameter
Image circle (f/22):	325mm diameter (8"x10")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	290.0mm
Overall length (F):	43mm (1.7")
Weight:	290g (10.2 oz.)

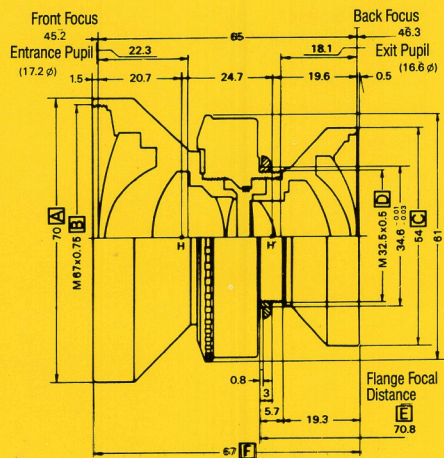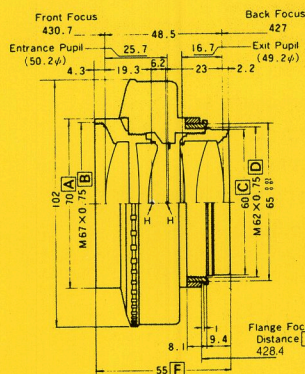
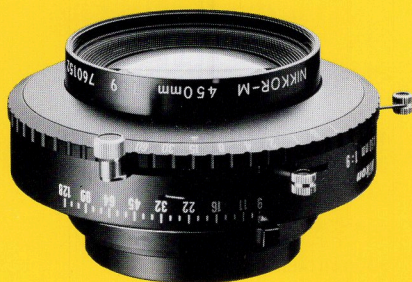


Nikkor-M 450mm f/9

Product number:	1323
Focal length:	450mm
Maximum aperture:	f/9
Optical construction:	4 elements in 3 groups
Aperture range:	f/9-f/128
Covering power (f/9):	50°
Covering power (f/22):	52°
Image circle (f/9):	420mm diameter
Image circle (f/22):	440mm diameter (10"x12")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	428.4mm
Overall length (F):	55mm (2.2')
Weight:	640g (22.6 oz.)

Nikkor-SW 65mm f/4

Product number:	1341
Focal length:	65mm
Maximum aperture:	f/4
Optical construction:	7 elements in 4 groups
Aperture range:	f/4-f/45
Covering power (f/4):	80°
Covering power (f/16):	105°
Image circle (f/4):	110mm diameter
Image circle (f/16):	170mm diameter (4"x5")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	54mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	70.8mm
Overall length (F):	67mm (2.6")
Weight:	370g (13.1 oz.)

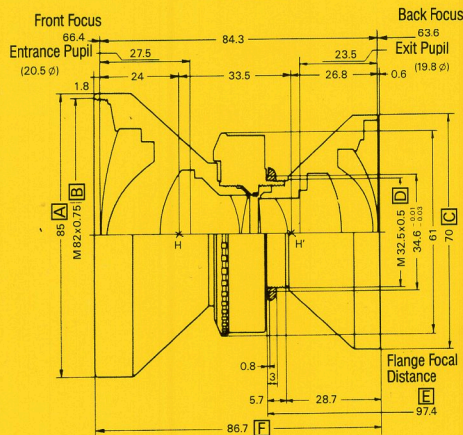
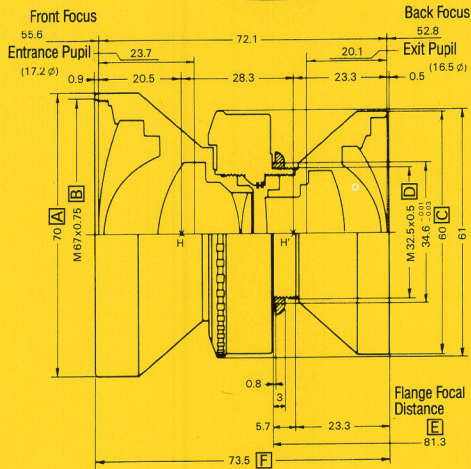


Nikkor-SW 75mm f/4.5

Product number:	1343
Focal length:	75mm
Maximum aperture:	f/4.5
Optical construction:	7 elements in 4 groups
Aperture range:	f/4-f/45
Covering power (f/4.5):	80°
Covering power (f/16):	106°
Image circle (f/4.5):	126mm diameter
Image circle (f/16):	200mm diameter (120mm x 165mm)
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	81.3mm
Overall length (F):	73.5mm (2.9")
Weight:	420g (14.8 oz.)

Nikkor-SW 90mm f/4.5

Product number:	1345
Focal length:	90mm
Maximum aperture:	f/4.5
Optical construction:	7 elements in 4 groups
Aperture range:	f/4.5-f/64
Covering power (f/4.5):	80°
Covering power (f/16):	105°
Image circle (f/4.5):	154mm diameter
Image circle (f/16):	235mm diameter (5"x7")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	85mm diameter
Attachment size (B):	82mm dia. x 0.75mm (P)
Rear mount size (C):	70mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	97.4mm
Overall length (F):	86.7mm (3.4")
Weight:	600g (21.2 oz.)


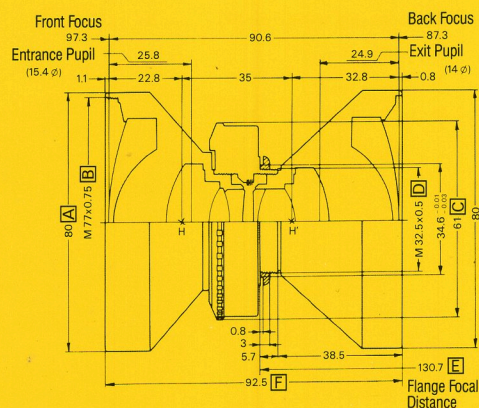
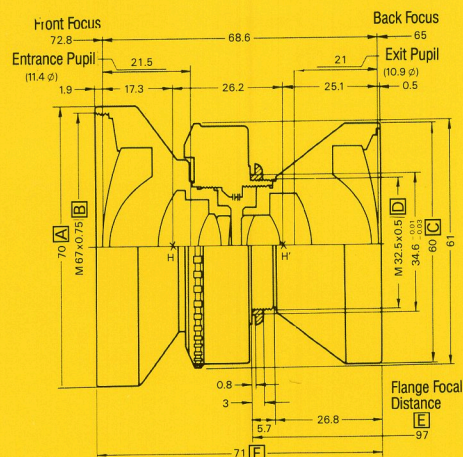


Nikkor-SW 90mm f/8

Product name:	1344
Focal length:	90mm
Maximum aperture:	f/8
Optical construction:	8 elements in 4 groups
Aperture range:	f/8-f/64
Covering power (f/8):	80°
Covering power (f/22):	105°
Image circle (f/8):	154mm diameter
Image circle (f/22):	235mm diameter (5"x7")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	97.0mm
Overall length (F):	71mm (2.8")
Weight:	360g (12.7 oz.)

Nikkor-SW 120mm f/8

Product number:	1346
Focal length:	120mm
Maximum aperture:	f/8
Optical construction:	8 elements in 4 groups
Aperture range:	f/8-f/64
Covering power (f/8):	80°
Covering power (f/22):	105°
Image circle (f/8):	200mm diameter
Image circle (f/22):	312mm diameter (8"x10")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	80mm diameter
Attachment size (B):	77mm dia. x 0.75mm (P)
Rear mount size (C):	80mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	130.7mm
Overall length (F):	92.5mm (3.6")
Weight:	610g (21.5 oz.)

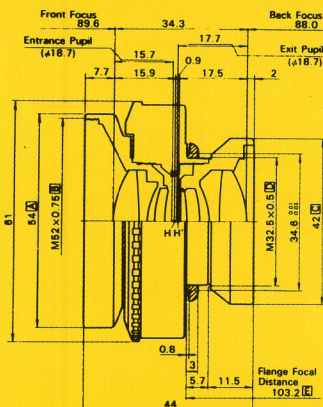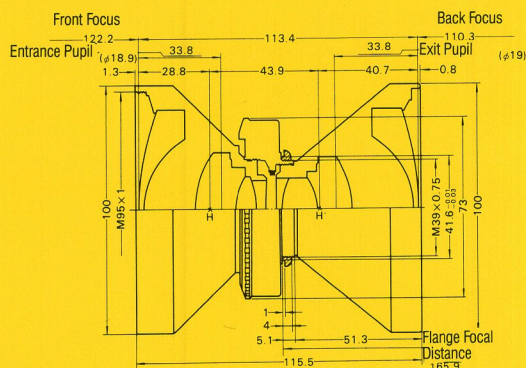
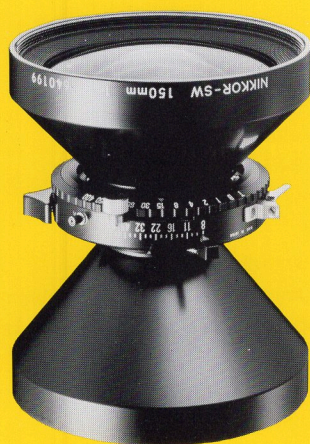


Nikkor-SW 150mm f/8

Product number:	1351
Focal length:	150mm
Maximum aperture:	f/8
Optical construction:	8 elements in 4 groups
Aperture range:	f/8-f/64
Covering power (f/8):	80°
Covering power (f/22):	106°
Image circle (f/8):	253mm diameter
Image circle (f/22):	400mm diameter (10"x12")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1mm (P)
Rear mount size (C):	100mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	165.9mm
Overall length (F):	115.5mm (4.5")
Weight:	1,050g (37.0 oz.)

Nikkor-W 105mm f/5.6

Product name:	1309
Focal length:	105mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/45
Covering power (f/5.6):	60°
Covering power (f/22):	73°
Image circle (f/5.6):	121mm diameter
Image circle (f/22):	155mm diameter (4"x5")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	103.2mm
Overall length (F):	44mm (1.7")
Weight:	185g (6.6 oz.)

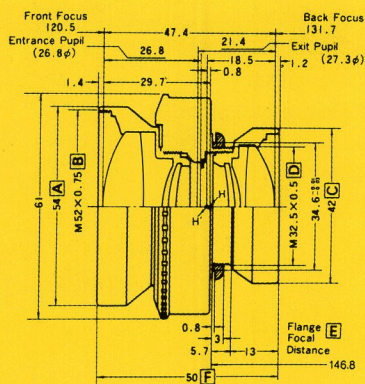
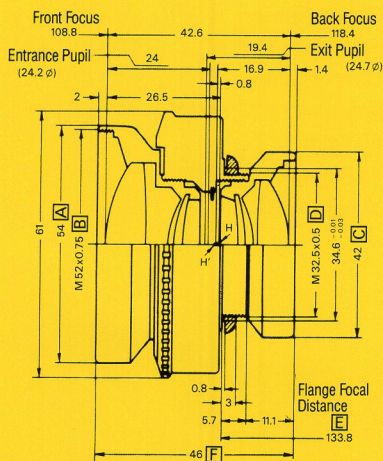


Nikkor-W 135mm f/5.6

Product number:	1312
Focal length:	135mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	73°
Image circle (f/5.6):	156mm diameter
Image circle (f/22):	200mm diameter (120mm x 165mm)
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	133.8mm
Overall length (F):	46mm (1.8")
Weight:	200g (7.1 oz.)

Nikkor-W 150mm f/5.6

Product number:	1314
Focal length:	150mm
Maximum aperture:	1:5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	70°
Image circle (f/5.6):	174mm diameter
Image circle (f/22):	210mm diameter (5"x7")
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	146.8mm
Overall length (F):	50mm (2.0")
Weight:	230g (8.1 oz.)


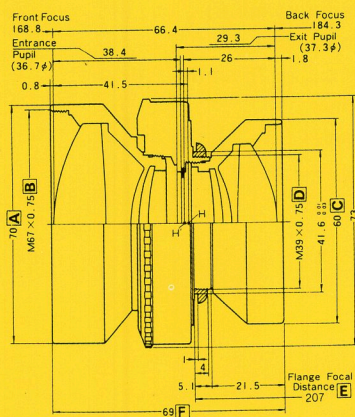
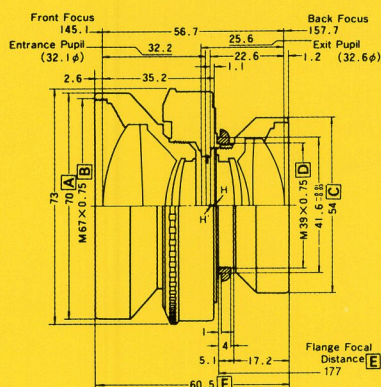


Nikkor-W 180mm f/5.6

Product name:	1316
Focal length:	180mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	70°
Image circle (f/5.6):	208mm diameter
Image circle (f/22):	253mm diameter (5"x7")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	54mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	177.0mm
Overall length (F):	60.5mm (2.4")
Weight:	380g (13.4 oz.)

Nikkor-W 210mm f/5.6

Product number:	1318
Focal length:	210mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	70°
Image circle (f/5.6):	243mm diameter
Image circle (f/22):	295mm diameter (6 1/2"x 8 1/2")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	207.0mm
Overall length (F):	69mm (2.7")
Weight:	460g (16.2 oz.)

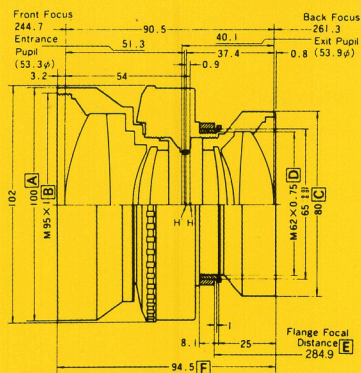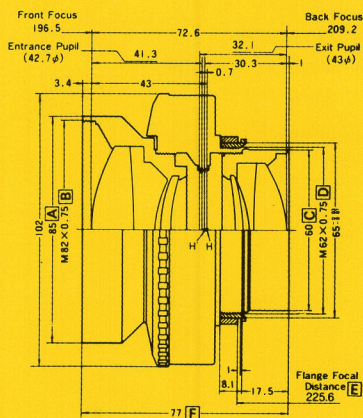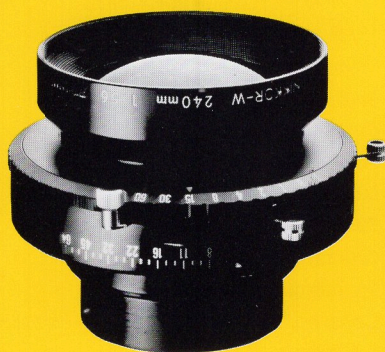


Nikkor-W 240mm f/5.6

Product number:	1319
Focal length:	240mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	70°
Image circle (f/5.6):	278mm diameter
Image circle (f/22):	336mm diameter (8"x10")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	85mm diameter
Attachment size (B):	82mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	225.6mm
Overall length (F):	77mm (3.0")
Weight:	820g (28.9 oz.)


Nikkor-W 300mm f/5.6

Product name:	1320
Focal length:	300mm
Maximum aperture:	f/5.6
Optical construction:	6 elements in 4 groups
Aperture range:	f/5.6-f/64
Covering power (f/5.6):	60°
Covering power (f/22):	70°
Image circle (f/5.6):	346mm diameter
Image circle (f/22):	420mm diameter (10"x12")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1mm (P)
Rear mount size (C):	80mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	284.9mm
Overall length (F):	94.5mm (3.7")
Weight:	1250g (44.1 oz.)

Nikkor-W 360mm f/6.5




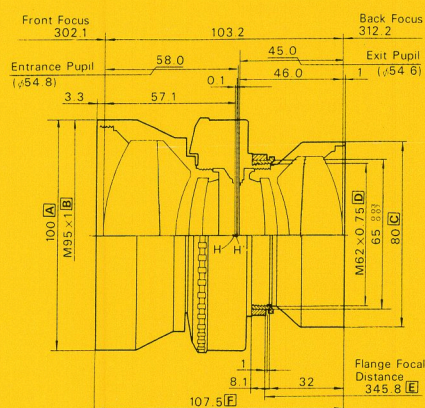


Product number:	1327
Focal length:	360mm
Maximum aperture:	f/6.5
Optical construction:	6 elements in 4 groups
Aperture range:	f/6.5-f/64
Covering power (f/6.5):	60°
Covering power (f/22):	69°
Image circle (f/6.5):	415mm diameter
Image circle (f/22):	494mm diameter (11" x 14")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1mm (P)
Rear mount size (C):	80mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	345.8mm
Overall length (F):	107.5mm (4.2")
Weight:	1420g (50.1 oz.)

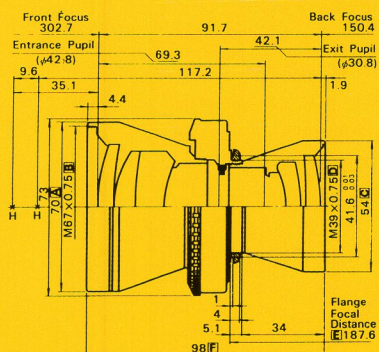




Nikkor-T ED 270mm f/6.3

Product number:	1352
Focal length:	270mm
Maximum aperture:	f/6.3
Optical construction:	5 elements in 4 groups
Aperture range:	f/6.3-f/64
Covering power (f/6.3):	24°
Covering power (f/22):	33°
Image circle (f/6.3):	114mm diameter
Image circle (f/22):	160mm diameter (4" x 5")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	187.6mm
Overall length (F):	98mm (3.9")
Weight:	590g (20.8 oz.)

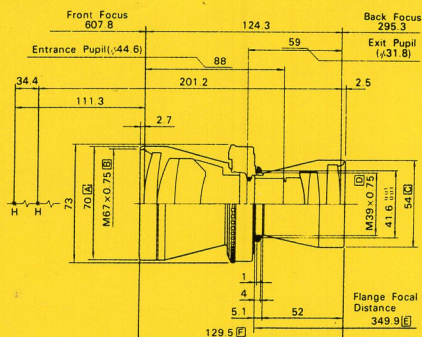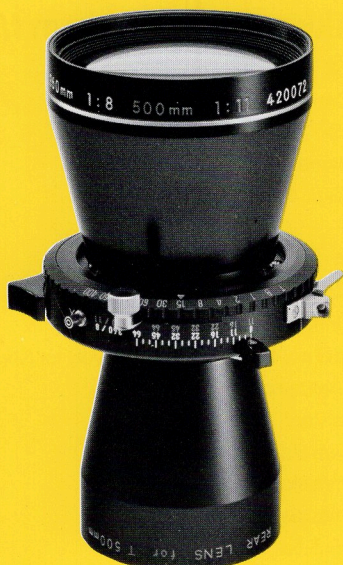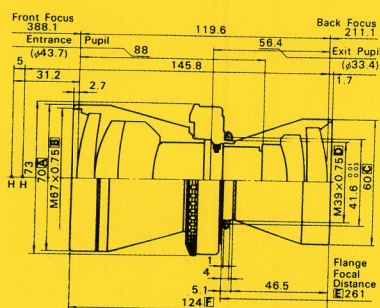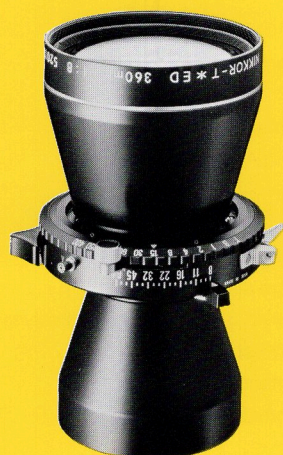

Product name:	1353
Focal length:	360mm
Maximum aperture:	f/8
Optical construction:	5 elements in 4 groups
Aperture range:	f/8-f/64
Covering power (f/8):	24°
Covering power (f/22):	33°
Image circle (f/8):	154mm diameter
Image circle (f/22):	210mm diameter (5" x 7")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	261.0mm
Overall length (F):	124mm (4.9")
Weight:	800g (28.2 oz.)

Product number:	1354
Focal length:	500mm
Maximum aperture:	f/11
Optical construction:	6 elements in 4 groups
Aperture range:	f/11-f/64
Covering power (f/11):	17°
Covering power (f/22):	24°
Image circle (f/11):	154mm diameter
Image circle (f/22):	210mm diameter (5" x 7")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	54mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	349.9mm
Overall length (F):	129.5mm (5.1")
Weight:	760g (26.8 oz.)

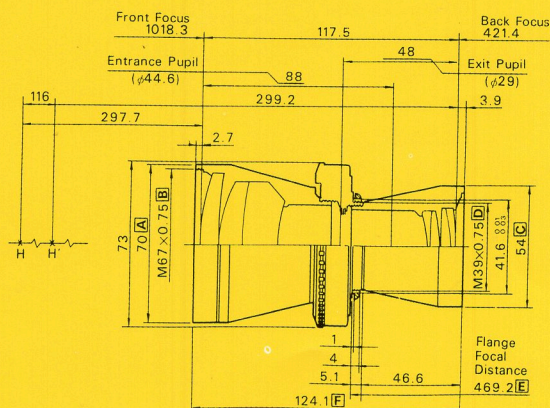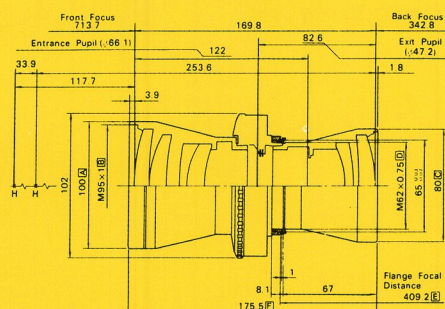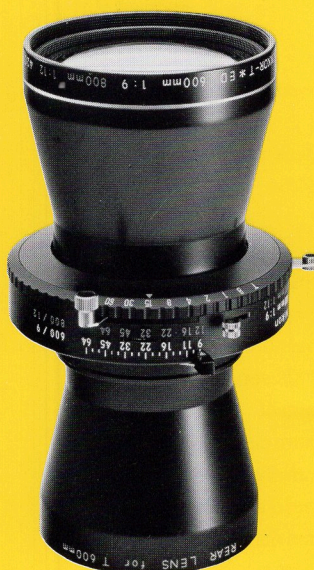


Product number:	1355
Focal length:	600mm
Maximum aperture:	f/9
Optical construction:	6 elements in 5 groups
Aperture range:	f/9-f/64
Covering power (f/9):	19°
Covering power (f/22):	29°
Image circle (f/9):	200mm diameter
Image circle (f/22):	310mm diameter (8"x10")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1mm (P)
Rear mount size (C):	80mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	409.6mm
Overall length (F):	175.5mm (6.9")
Weight:	1650g (58.2 oz.)

Product name:	1357
Focal length:	720mm
Maximum aperture:	f/16
Optical construction:	7 elements in 4 groups
Aperture range:	f/16-f/64
Covering power (f/16):	12°
Covering power (f/22):	17°
Image circle (f/16):	154mm diameter
Image circle (f/22):	210mm diameter (5"x7")
Shutter:	Copal no. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm dia. x 0.75mm (P)
Rear mount size (C):	54mm diameter
Flange attachment size (D):	39mm dia. x 0.75mm (P)
Flange focal distance (E):	469.2mm
Overall length (F):	124.1mm (4.9")
Weight:	780g (27.5 oz.)




Nikkor-T ED 800mm f/12



Product number:	1356
Focal length:	800mm
Maximum aperture:	f/12
Optical construction:	7 elements in 5 groups
Aperture range:	f/12-f/64
Covering power (f/12):	14°
Covering power (f/22):	22°
Image circle (f/12):	200mm diameter
Image circle (f/22):	310mm diameter (8" x 10")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1 mm (P)
Rear mount size (C):	70mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	527.4mm
Overall length (F):	176.5mm (6.9")
Weight:	1600g (56.4 oz.)

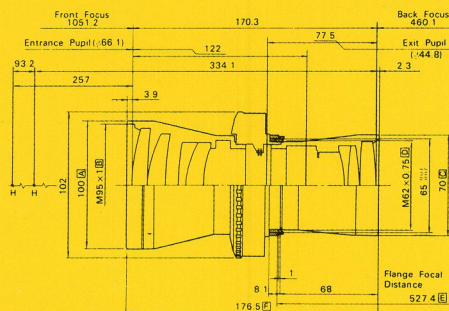

Nikkor-T ED 1200mm f/18

Product number:	1364
Focal length:	1200mm
Maximum aperture:	f/18
Optical construction:	8 elements in 5 groups
Aperture range:	f/18-f/64
Covering power (f/18):	10°
Covering power (f/22):	15°
Image circle (f/18):	200mm diameter
Image circle (f/22):	310mm diameter (8" x 10")
Shutter:	Copal no. 3, designed exclusively for Nikon
Shutter speeds:	1-1/125 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	100mm diameter
Attachment size (B):	95mm dia. x 1 mm (P)
Rear mount size (C):	60mm diameter
Flange attachment size (D):	62mm dia. x 0.75mm (P)
Flange focal distance (E):	755.7mm
Overall length (F):	179mm (7.0")
Weight:	1480g (52.2 oz.)

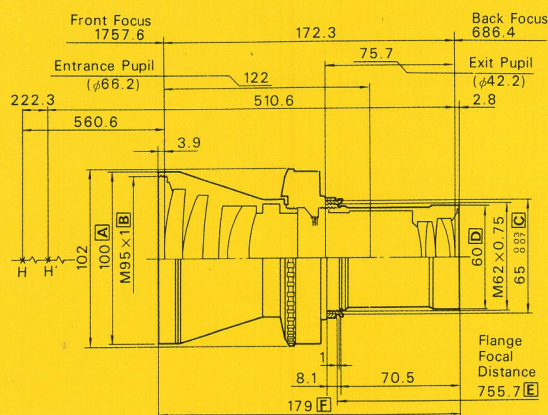

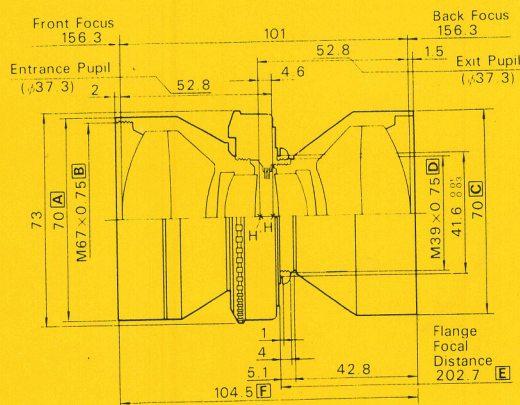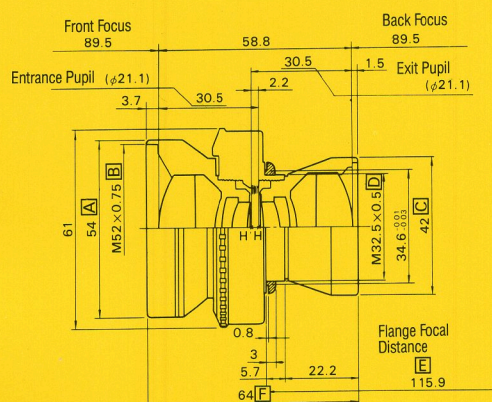

Nikkor-AM ED 120mm f/5.6

Product number:	1325
Focal length:	120mm
Maximum aperture:	f/5.6
Optical construction:	8 elements in 4 groups
Aperture range:	f/5.6-f/45
Covering power (f/5.6):	47°
Covering power (f/22):	55°
Image circle (f/5.6):	210mm diameter, M = 1:1
Image circle (f/22):	250mm diameter (5" x 7"), M = 1:1
Shutter:	Copal no. 0, designed exclusively for Nikon
Shutter speeds:	1-1/500 sec., T, B
Flash sync socket:	X contact
Front mount size (A):	54mm diameter
Attachment size (B):	52mm dia. x 0.75mm (P)
Rear mount size (C):	42mm diameter
Flange attachment size (D):	32.5mm dia. x 0.5mm (P)
Flange focal distance (E):	115.9mm
Overall length (F):	64mm (2.5")
Weight:	295g (10.4 oz.)

Nikkor-AM ED 210mm f/5.6

Product number:	1326
Focal length:	210mm
Maximum aperture:	F/5.6
Optical construction:	8 elements in 4 groups
Covering power (f/5.6):	41°
Covering power (f/22):	51°
Image circle (f/5.6):	310mm diameter, M = 1:1
Image circle (f/22):	400mm distance (10" x 12"), M' 1:1
Shutter:	Copal No. 1, designed exclusively for Nikon
Shutter speeds:	1-1/400 sec. T, B
Flash sync socket:	X-contact
Front mount size (A):	70mm diameter
Attachment size (B):	67mm diameter x 0.75 mm(P)
Rear mount size (C):	70mm diameter
Flange attachment size (D):	39mm diameter x 0.75mm(P)
Flange focal distance (E):	202.7mm
Overall length (F):	104.5mm (4.1")
Weight:	850g (30.0 oz.)