

FX-2



- 50mm f/1.9 w/CASE
- BODY ONLY
- CASE for FX-2

Product No. 612240
 Product No. 121010
 Product No. 931259

Utility SLR Featuring Contax/Yashica Mount, TTL Full Aperture Metering

The Yashica FX-2 is a moderately priced utility SLR system camera featuring the same Contax/Yashica mount incorporated in other higher priced Yashica SLR models. It accepts the full range of interchangeable Yashica and Zeiss T* lenses.

Its through-the-lens full aperture metering system affords easy and accurate exposure setting in all photographic applications. The needle of the fully cross-coupled zero-in method CdS meter is visible through the finder. All one has to do is to turn the aperture ring or the shutter speed control dial to center the needle in the enclosure after setting the meter switch to ON. Besides the choice of optics from two high precision lens systems, the FX-2 also accepts most of the Yashica SLR system accessories.

- YASHICA LENS DSB 50 mm f/1.9 standard lens featuring Contax/Yashica mount and fully automatic diaphragm system; minimum focus 0.5 m (19-11/16 in); minimum aperture f/16; interchangeable with any one of the wide range of Yashica and Zeiss T* lenses.
- Focal plane shutter with 11 clickstop settings from 1/1000 to 1 sec., plus B; built-in self-timer; standard X sync terminal plus direct X contact shoe.
- Through-the-lens full aperture metering with CdS sensors built into the pentaprism housing for average light reading; fully cross-coupled to aperture and shutter speed controls; meter needle visible through the finder; correct exposure set by centering needle in the enclosure after preselecting either the lens aperture or shutter speed; ASA range from 12 to 1600; EV range from EV 1.85 to EV 18 (f/1.9 at ASA 100); operates on one 1.3V mercury battery (Eveready EP-675R, UCAR EP-675R, Mallory RM-675R or equivalent).
- Through-the-lens reflex viewfinder with image magnification of 0.89 X (at infinity) and showing a field approximately 90% of the actual picture area.
- Microprism focusing spot at the center of the finder field for easy and accurate focusing.
- Other features include film advance lever which advances the exposed frame, charges the shutter and registers count of exposure with one sweeping stroke or several short ratchet actions; multi-slot take-up spool for easy film loading; rapid rewind crank-handle; auto-resetting exposure counter; lens release button; meter switch on base of film rewind knob; accessory shoe with direct X contact.
- Size and weight: 144.5 x 94 x 51 mm (body only); 690 grams.

Lens Shade and Filter Size

- 54 mm slip-on type lens shade (50 mm f/1.9)
- 52 screw-in type filters (50 mm f/1.9)

YASHICA

Easy-to-Use Through-the-Lens Viewfinder

The through-the-lens viewfinder of the FX-2 shows images at maximum brightness at all times for utmost ease in viewing and focusing.

Incorporated at the center of the field is the microprism focusing spot affording critical focusing with utmost convenience.

On the right edge of the finder field is the meter pointer and the enclosure. When the meter pointer is centered in the enclosure by rotating either the aperture ring or the shutter speed control dial, correct exposure is assured. When it swings up, over-exposure is indicated, while under-exposure is warned if it swings down.


On/Off Switch Conserves Battery Power

The built-in CdS meter functions only when the switch is set at ON. This switch located on the base of the film rewind knob can be readily manipulated with the left fingertip while holding the camera in shooting position. If this switch is reset to OFF when the camera is not in use, battery power can be conserved.


Contax/Yashica Mount

Like all recent Yashica SLR models, the FX-2 features a high precision, highly durable Contax/Yashica mount featuring built-in linkage system for full aperture light reading and fully automatic diaphragm action.


This feature permits the FX-2 user to choose any one of the wide range of Yashica and Zeiss T* lenses for utmost versatility in photographic creativity.

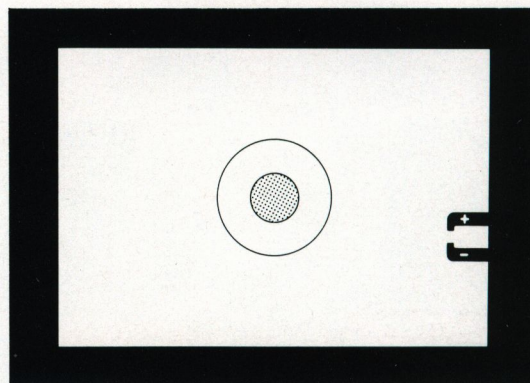

The bright through-the-lens viewfinder insures easy viewing and focusing.

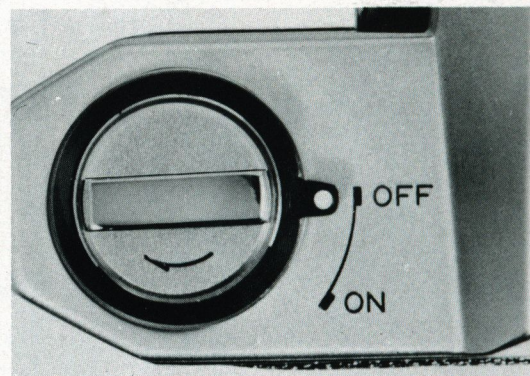

The on/off switch permits switching off of the CdS meter battery to conserve power when not in use.

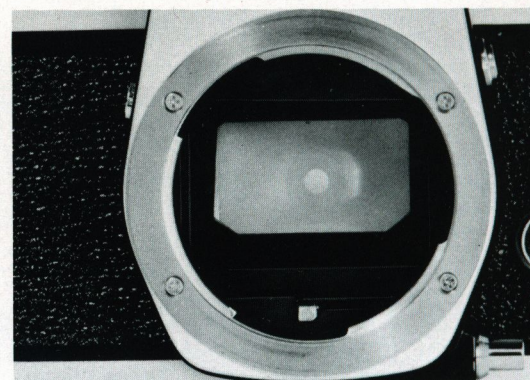

The highly durable Contax/Yashica mount has a built-in linkage system and permits use of all Yashica and Zeiss T lenses.*