


PRICE 25 CENTS



Quick Focus Lever
Guidebook

graflex[®] xl
camera systems

QUICK FOCUS LEVER

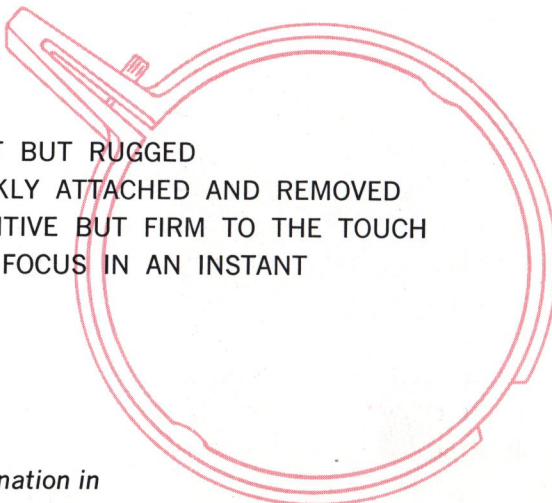

LIGHT BUT RUGGED
QUICKLY ATTACHED AND REMOVED
SENSITIVE BUT FIRM TO THE TOUCH
FINE FOCUS IN AN INSTANT

*Use with any combination in
the xl Camera Systems . . .*

ATTACHING YOUR QUICK FOCUS LEVER



Quick Focus Lever

The illustration shows the Quick Focus Lever mounted in the most-used position. Set the focusing ring on the camera at the infinity position.

Back off the knurled adjusting screw on the Focus Lever and orient it to the camera as shown. Two lugs on the inside diameter of the Focus Lever should face upward, away from the camera. Align the lugs with two of the knurled finger-grip indents on the focusing ring. Press the Focus Lever on the ring, seating it flush to the shoulder of the ring. Tighten the knurled adjusting screw.

Note that the mounting is not limited to the position shown. The Focus Lever can be mounted in any position most convenient for you!

Home Office:

3750 Monroe Avenue
Rochester, New York 14603

Western Division:

800 North Cole Avenue
Hollywood, California 90038

Midwest Service Department:

1345 Diversey Parkway
Chicago, Illinois 60614

Graflex of Canada Limited:

47 Simcoe Street
Toronto 1, Ontario, Canada



GRAFLEX, Inc.
Rochester, New York
14603, U.S.A.

A subsidiary of
General Precision
Equipment Corporation