

Konica EF N

35mm camera


Cat. No. 701-155



The Konica EF N has been acclaimed as the perfect family camera — always ready for action, and easy to use by any member of the family. With a professional quality Hexanon Lens and built-in automatic CdS exposure meter, and using the full frame 35mm film format, the Konica EF N delivers clear, razor sharp photos. The built-in, “pop-up” electronic flash means perfect exposure indoors as well as outdoors.

Key Features



- Automatic exposure control with the sensitive CdS meter, built into the lens barrel, measures existing light and automatically sets the shutter speed and matching lens aperture for correct exposure. Adjusts for ASA 25 to ASA 400 film.
- Built-in, “pop-up” electronic flash. Press the button, flash “pops up” into picture taking position and automatically turns itself on in one step. Dual ready lights indicate flash has recycled.
- Automatic flash exposure control. Just focus and shoot — EF N automatically sets correct lens opening, at every distance.
- Between the lens, three stage programmed shutter. Operates at 1/250 second unless existing light requires f2.8 lens aperture. Automatically changes speed to 1/125 or 1/60 second for extended low light shooting. Synchronized for electronic flash at all speeds.
- Unique “memory lock” lets user adjust for special lighting conditions (ex. strong backlight). Partially depressing the shutter release button locks the meter at the proper exposure. User can then move camera or change position, depress shutter release all the way, and shoot a perfectly exposed picture.
- Easy “symbol” focusing system. Indicator needle in viewfinder displays appropriate distance “symbol” for close-up, moderate, medium and long range photos, as lens is set for correct distance. Matching “symbols” plus specific foot and metric distances are displayed on lens barrel focusing ring.
- Ultra sharp, four element Konica Hexanon 38mm f2.8 lens with Color Dynamic Coating to optimize color saturation and virtually eliminate flare.
- Variable delay self timer operates from 3 to 8 seconds.
- Easy film loading and unloading with multi-slotted take-up spool.
- A special Konica Flash Close-Up Attachment is available as an accessory for close-up photos of small objects, papers, etc. Attaches to filter ring of camera.

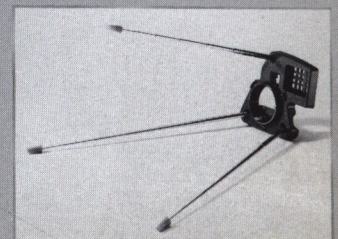

Cat. No. 705-117

Konica EP N

35mm camera

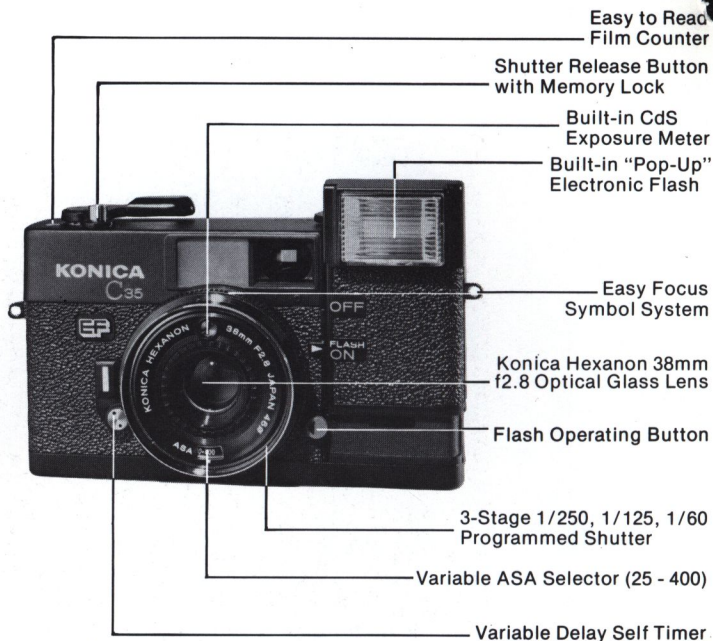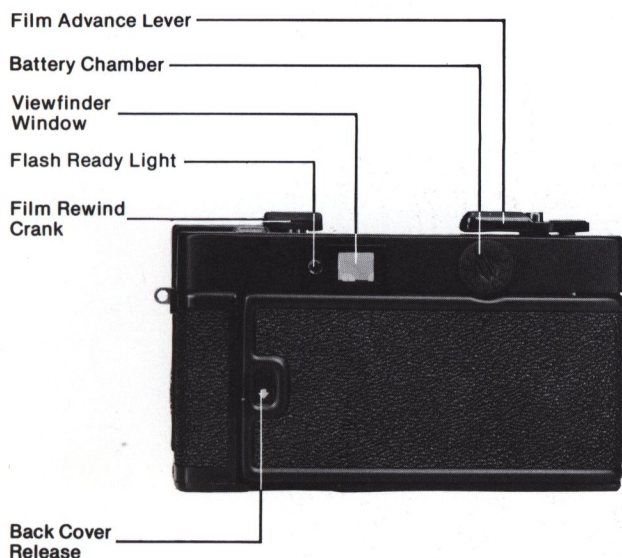

Technical Specifications

Type Automatic 35mm zone focus with built-in electronic flash.

Format 24 x 36mm, full frame 35mm

Lens Konica Hexanon 38mm f2.8, three group, four element construction, optical glass, Color Dynamic Coated.

Focus Zone focus. Closest focusing distance 3.3 feet, (1 meter).

Shutter Behind the lens programmed shutter. Speeds 1/250, 1/125, 1/60.

Aperture Range f2.8 - f22.

Exposure Meter CdS, electronic, automatically selects shutter speed and lens aperture

EV Range EV 9 (f2.8 at 1/60 sec.) to EV17 (f22 at 1/250 sec.) with ASA 100.

ASA Range ASA 25 - 400.

Flash Built-in, pop-up electronic flash. Guide No. 45 (feet) 14 (metric) at ASA 100. Recycle time 5-7 seconds. Approximately 250 flashes per set of two AA Alkaline batteries. Dual flash ready lights atop camera and adjacent to viewfinder. Flash duration 1/1000 second. Coverage 56° (horizontal), 40° (vertical).

Flash Sync Synchronized at all shutter speeds

Flash Exposure Control Konica Flashmatic System — "one action" pops up, activates flash. Automatically selects correct aperture.

Viewfinder . Bright frame finder. Aperture indicator needle shows correct aperture in use and under exposure warning. Indicator shows distance being set. Parallax compensation guide.

Power Source Two (2) 1.5V AA Alkaline batteries and one (1) PX-675 Mercury battery.

Film Loading Konica IGL (Instant Grip Loading)

Film Transport Single action, rapid film advance lever 132° action, with double exposure prevention device.

Rewind Rapid rewind crank handle.

Frame Counter Counts number of exposures taken. Automatic zero reset.

Filter Screw in type, 46mm

Dimensions 5.0" x 2.9" x 2.1" (128 x 73 x 53mm)

Weight 12 oz. (350g) without batteries

Specifications subject to change without notice.

Konica Division **BERKEY MARKETING COMPANIES**

25-20 Brooklyn-Queens Expressway West, Woodside, NY 11377 • 1011 Chestnut Street, Burbank, CA 91506



Printed in U.S.A.