

35mm 3-Dimensional Camera

Cat. No. N3000



This unique 35mm camera has advanced state-of-the-art features that give you 3-Dimensional photographs with depth and realism as well as excellent detail and beautifully rich and vibrant color.

Key Features

- Fully automatic — CdS cell measures light to program shutter speed and aperture for the best combination to achieve correctly exposed negatives with one button picture taking ease.
- Uses popular brands of 35mm color print film — any brand either ISO/ASA 100 or 400, DIN 21 or 27 film in standard lengths of 36, 24, 20 or 12 exposures. Films sold with prepaid processing from any other company cannot be redeemed by Nimslo.
- Viewfinder Information Display — green-dot (LED) sufficient-light and red-dot (LED) low-light warning in bright-frame vertical format viewfinder.
- Film Selection Switch — two position ASA selector conveniently located on top of camera.
- Hot Shoe (XSYNC) Contact — cordless connection to most types of electronic flash units. Dedicated contact for Nimslo Opti-Lite Electronic Flash.
- Single Stroke Film Advance with built-in double exposure prevention.
- Light reading actuated by soft touch Shutter Release Button.
- Cable Release Socket in Shutter Release Button.
- Tripod Socket in base of camera.
- Small compact styling and lightweight construction.
- Comfortable neckstrap attaches easily to the camera's strap rings.

Technical Specifications

Camera Type 35mm, automatic 3-Dimensional

Film Size/Type 35mm color print **only**

Film Speeds ISO/ASA 100 and 400, DIN 21 and 27

Shutter Automatic, electronically programmed speeds from 1/30 sec. at f5.6 to 1/500 sec. at f22

Lenses Quadra Lens System: four 35mm, f5.6, air-spaced triplets, with coated, high-index, optical glass elements pre-focused 6' (2m) to infinity

Exposure Counter Automatic reset

Power Source Three (3) No. 386 Eveready or Duracell, Silver Oxide Batteries. Equivalent batteries are: Maxell SR 43W, Panasonic WL11 and Ray-O-Vac RW24/44

Dimensions Approximately 5³/₈ x 2⁷/₈ x 1⁵/₈" (136.5 x 73 x 41.3mm)

Package Dimensions 6³/₈ x 3³/₈ x 4¹¹/₁₆" (162 x 85.6 x 119mm)

Weight 12 oz. (340g)

Shipping Weight Approximately 16 oz. (453.6g)

Package Contents

The Nimslo 35mm 3-Dimensional Camera is supplied with three No. 386 "H" Type Silver Oxide batteries, neckstrap, strap pouch to hold process identification stickers, instruction manual and product registration card.

©1983 BMC, Division of Berkey Photo, Inc.

Specifications Subject to Change Without Notice

Nimslo BERKEY MARKETING COMPANIES

25-20 Brooklyn-Queens Expressway West, Woodside, NY 11377 • 3400 East 70th Street, Long Beach, CA 90805

NIMSLO®

Opti-Lite™ Electronic Flash

Cat. No. N2000



Key Features

- Automatic Electronic Flash — auto exposure range of 6 to 25 feet.
- Twin Head Flash Design — direct and bounce heads allow you to direct the best lighting toward and behind your subject.
- Green LED Indicator — when you lightly press the shutter release and look through the viewfinder, this indicator tells you when the flash is ready and also that the camera and flash are synchronized and ready for picture taking.
- Reference Chart — easy to use scale appears on the back of the flash and allows you to find the best bounce angle and flash-to-subject distance.
- ASA/OFF Switch — film speed setting, flash-on and flash-off incorporated into a single 3-position switch.
- Amber ready flash light indicator.
- Open flash button.
- Hot shoe contact.
- Compact, rugged and lightweight construction.
- May be used with other 35mm cameras.

Technical Specifications

Flash Type Twin head, automatic electronic

Flash Distance

ISO/ASA 100, DIN 21 Film 6 to 13 feet (2 to 4m)
ISO/ASA 400, DIN 27 Film 6 to 25 feet (2 to 8m)

Power Source 2 AA Alkaline (approximately 80 flashes with fresh batteries) or 2 AA NiCad (approximately 60 flashes with fully recharged batteries)

Bounce Angle (Bounce Flash Head) 0°, 45°, 60°, 75°, 90°

Angle of Coverage Main (Bounce Head) 37° x 45°
Sub (Direct Head) 37° x 45°

Color Temperature 5800°K balanced for daylight color film

Dimensions Approximately 3³/₈ x 2¹/₈ x 2⁵/₈"
(85.7 x 54 x 66.7mm)

Package Dimensions 6³/₈ x 2⁵/₁₆ x 3³/₈"
(161.8 x 58.7 x 85.6mm)

Weight 5.6 oz. (158.8g)

Shipping Weight Approximately 9.5 oz. (269.3g)

Nimslo, Quadra Lens and Opti-Lite are trademarks of Nimslo Corporation.

Package Contents

The Nimslo Opti-Lite Electronic Flash is supplied with instruction manual and product registration card.

©1983 BMC, Division of Berkey Photo, Inc.

Specifications Subject to Change Without Notice

Nimslo BERKEY MARKETING COMPANIES

25-20 Brooklyn-Queens Expressway West, Woodside, NY 11377 • 3400 East 70th Street, Long Beach, CA 90805

222NM883

Printed in U.S.A.

NIMSLO[®]

Carrying Case

Cat. No. N4001



Key Features

- Designed especially for the protection of your Nimslo 35mm 3-Dimensional Photographic System.
- Durable and handsome — this case is constructed of maintenance-free, grained vinyl material.
- Compartmentalized for easy access — the fully lined and metal zippered pockets hold the Nimslo Camera and Flash in the partitioned top compartment, instruction books in the center compartment, and up to four rolls of film and extra batteries in the front compartment.
- Adjustable shoulder strap — goes from hand to shoulder length and features a non-slip suede backing for added carrying ease.
- Compact and lightweight construction.

Technical Specifications

Color	Black only
Material	Expanded, grained support vinyl
Dimensions	Approximately 6 ³ / ₄ x 3 ¹ / ₄ x 5 ³ / ₄ " (171.5 x 22.6 x 146mm)
Package Dimensions	7 ⁴ / ₅ x 3 ¹ / ₄ x 6 ³ / ₈ " (198 x 82.6 x 162mm)
Weight	Approximately 5 oz. (141.8g)
Shipping Weight	Approximately 7 oz. (198.5g)

Package Contents
One Nimslo Carrying Case

©1983 BMC, Division of Berkey Photo, Inc.

Specifications Subject to Change Without Notice

Nimslo **BERKEY MARKETING COMPANIES**

25-20 Brooklyn-Queens Expressway West, Woodside, NY 11377 • 3400 East 70th Street, Long Beach, CA 90805

222NM883

Printed in U.S.A.

NIMSLO®

Camera Case


Cat. No. N4000



Snap-Open Front for
Quick and Easy Camera Use

Quality, Grained Vinyl

Special Contour Design

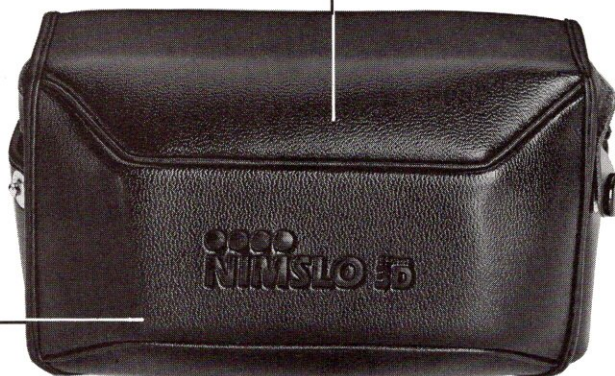

Key Features

- Special field-fitted custom design protects the camera, yet provides instant access for camera use.
- Durable and handsome. Constructed from maintenance-free, high quality vinyl.
- Easily attached — this fully-lined protective case conforms to the camera's shape, snapping open and shut quickly.
- Case is simple to remove for camera loading and unloading.
- Compact size — maximum protection with ultimate portability and ease of use.

Technical Specifications

Color Black only

Dimensions Approximately 5 5/8 x 2 3/4 x 3 3/8"
(14.3 x 7 x 8.5mm)

Package Dimensions 6 1/2 x 2 3/8 x 3 3/8"
(165 x 60.3 x 85.7mm)

Weight Approximately 3.5 oz. (99g)

Shipping Weight Approximately 4.5 oz. (127.6g)

Package Contents

One Nimslo Camera Case.

© 1983 BMC, Division of Berkey Photo, Inc.

Specifications Subject to Change Without Notice

Nimslo BERKEY MARKETING COMPANIES

25-20 Brooklyn-Queens Expressway West, Woodside, NY 11377 • 3400 East 70th Street, Long Beach, CA 90805

222NM883

Printed in U.S.A.