

PEN EE-3



Characteristics

- A half-frame 35mm camera of lightweight, compact design.
- Simple operation with program EE exposure control.
- Fixed focus, so there is no need for focusing. Focus range is 1.5 meters to infinity.
- A red warning mark appears and the shutter release locks when there is insufficient light for exposure.
- A flashmatic mechanism with a guide number of 14 at ASA 100 provides convenience when using the OLYMPUS PS 200, PS200 Quick flash units.
- Film advance requires only a 4/5 turn of the thumb-wheel with the exclusive OLYMPUS rear-winding system.
- Double the normal number of pictures is possible because of the half-frame size.

Notes • Accessories

- This camera needs no batteries because the exposure meter is electrically operated by sunlight.
- Do not leave the camera where there are high temperatures of 50°C (122°F) or more, or where there is high humidity.
- The camera may not operate normally when used in extremely low temperatures of -20°C (-4°F) or less.
- Do not leave near a TV set or other appliances with a strong magnetic field, or inside a steel container.
- Be careful not to apply excessive force when mounting on a tripod.

• Filters

Filters often improve your photos by controlling contrast and eliminating unwanted haze. For the Pen EE-3, 43.5mm screw-in type UV, Y2, 1A, 81C, 82C and ND4 filters are available.

• Attachment Lens (f=30cm, 43.5mmφ screw-in type)

By attaching this auxiliary lens you can shoot subjects as near as 27.9cm (11") for extremely effective close-ups.

• OLYMPUS PS 200/PS 200 Quick

The PS 200 operates on two 1.5V penlight batteries. The PS 200 Quick, with a fast 2.5-sec recycling time, uses four 1.5V penlight batteries. Guide number 14, m (45, ft) at ASA 100; direct contact; 5,800°K; 200 flashes.

OLYMPUS

PEN EE-3
Stock NO. 102-800

PEN EE-3

● ASA Ring

Set the ASA sensitivity of the film being used at the center indicator for correct EE operation. F stops, GN14 flashmatic markings, plus ASA settings from 25-400 are provided. Also accepts 43.5mm screw-in type filters.

● Lens

Zuiko 28mm F3.5.

● Electric Eye

(Light accepting cell)


Operated electrically by sunlight so batteries are not needed.

● Viewfinder

● Rewind Crank/ Rewind Knob

● Accessory Shoe


Provides direct electrical contact for flash units.

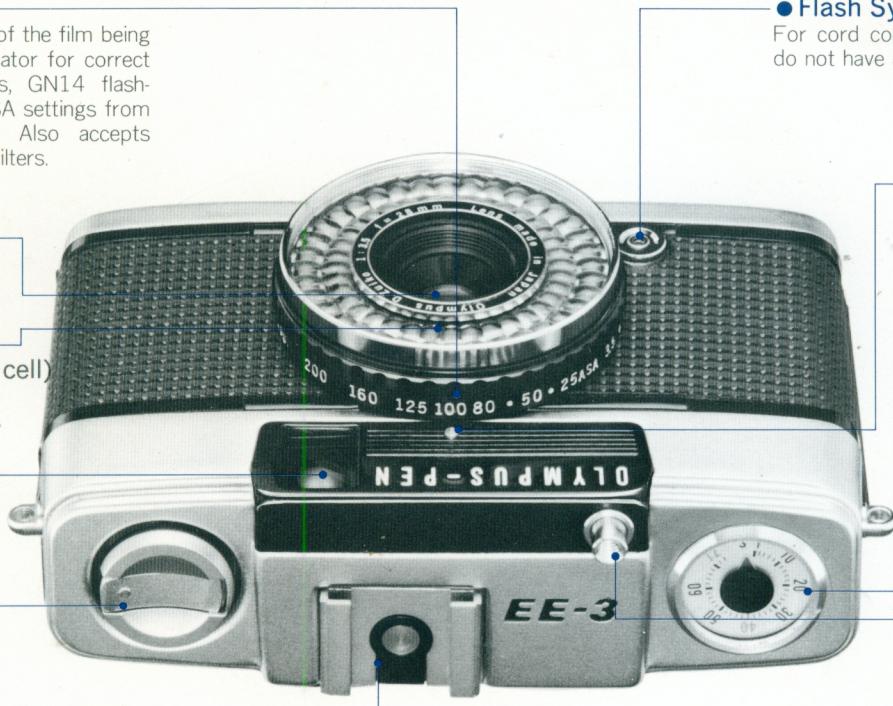

Actual size

● Viewfinder Eyepiece

A red warning mark appears and the shutter release locks when light conditions are too dark for EE exposure. A flash unit should be used in such cases (the shutter release can be pressed to see whether or not the red warning mark appears, without winding the film).



● Rear Cover Lock

Used to open the rear cover to load and unload film. The rear cover opens automatically when this lock is pulled down.

● Main Specifications

Film format: 35mm standard cassette (24×18mm half frame).

Lens: D. Zuiko 28mm F3.5 (4 elements, 3 groups).

Shutter: OLYMPUS program shutter.

Auto: 1/40 sec. and 1/200 sec.

Flash: 1/40 sec. X synchro contact.

Manual lens opening: F3.5-F22.

GN14 flashmatic distance scale: 1, 1.5, 2, 3, 4m.

Viewfinder: Luminous bright-frame finder, 0.5X magnifica-

tion, with red underexposure warning mark.

Film loading: EL (Easy Loading) system.

Film winding: Rear-winding, self-cocking, automatic winding stop, double-exposure prevention, double-winding prevention.

Film counter: Progressive type, automatic resetting.

Film rewind: Rewind button set, crank rewinding.

Focusing: Fixed-focus (1.5m to infinity).

Exposure: Fully automatic with EE control. Shutter release

● Flash Synchro Terminal

For cord connection of flash units that do not have a direct contact.

● Center Indicator

For setting ASA sensitivity, F stops and GN14 flashmatic.

● Film Counter

Counts in 10s to 72 exposures. Automatically resets to "S" when the rear cover is opened.

● Shutter Release Button

Located in the natural position for index finger operation. The shutter release locks when light conditions are not suitable for EE exposure.

● Film Winding Wheel


Rear-winding requires only a light touch of the right thumb.

● Rear Cover

● Rewind Button

Press when rewinding the film. Returns to its original position when the rear film winder is operated.

● Tripod Socket

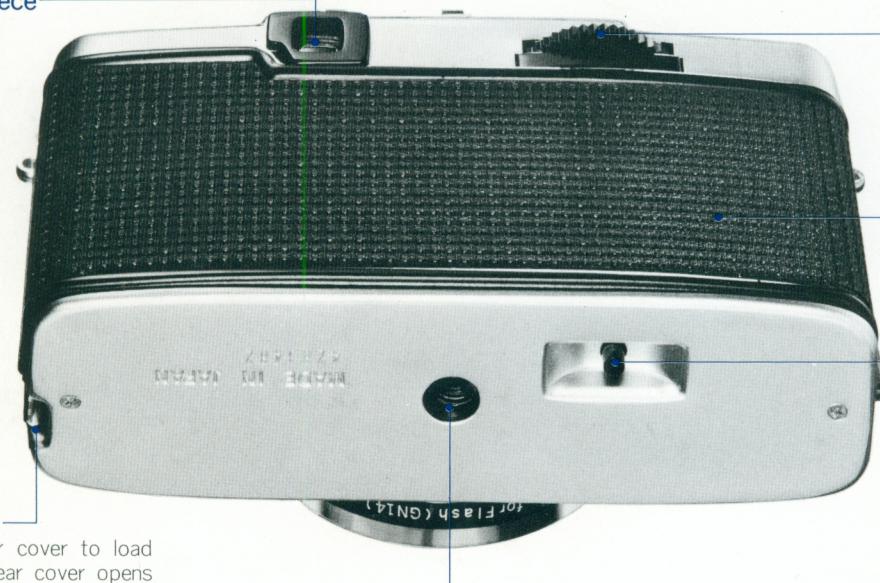

lock for underexposure. GN14 flashmatic device included.

Light measuring range: EV 8.5-EV17(ASA100).

Film speed scale: ASA 25-400.

Rear cover opening: Hinged type.

Accessory shoe: Cordless flash contact.

Dimensions and weight: 108×66×42mm.

(4.3"×2.6"×1.6"), 335g (12 oz.)

OLYMPUS