
1-20393-29

Canon TX w/lens FD 50mm f/1.8 S.C.

in case





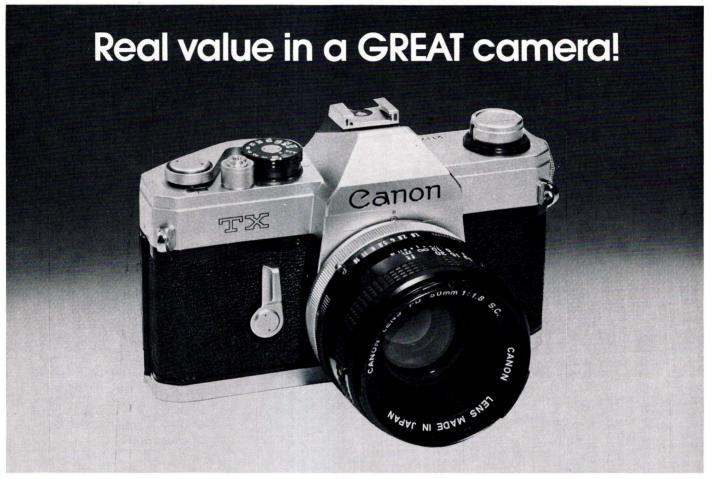

SPECIFICATIONS

- ■Type: 35mm single-lens reflex camera with focal plane shutter
- ■Picture Size: 24x36mm
- ■Standard Lens: FD 50mm f/1.8 S.C.
- ■Interchangeable Lenses: FD series for full aperture metering, FL series for stopped-down metering
- ■Viewfinder: eye-level pentaprism; Angle Finders A2 and B, Magnifier S, Dioptric Adjustment lenses (—1.2 standard, +3, +2, +1.5, +1, +0.5, 0, —0.5, —2, —3, —4) for eyesight correction can be attached.
- ■Focusing Screen: central microprism in matte-fresnel field with fine ground glass collar
- ■Field-of-View: 94% vertical, 94% horizontal of picture area; 0.85x magnification with standard 50mm lens at infinity
- ■Finder Information: meter needle and aperture needle; red signal appears when shutter speed is below coupling range of meter, stopped-down metering index mark, meter coupling range limit marks
- ■Mirror: shockless instant-return type
- ■Lens Mount: Canon breech-lock, FD, FL and R series lenses mountable
- ■Lens Functioning: FD lenses: full aperture metering coupled with automatic diaphragm; FL lenses: stopped-down metering, coupled with automatic diaphragm; R lenses: stopped-down metering with manually-operated diaphragm
- ■Shutter: focal-plane shutter with speeds from 1 to 1/500 sec. and B; X synchronization at 1/60 sec.
- ■Film Speed Range: ASA 25-2,000

- ■Exposure Meter: built-in, using CdS photocell. Coupled to ASA setting, shutter speed and aperture. Match-needle type full aperture metering mechanism. Central Emphasis Averaging metering system measures entire picture area with emphasis on center portion.
- ■Power Source: one 1.3V mercury battery (Mallory PX625 or Eveready EPX625)
- ■Exposure Meter Coupling Range: with ASA 100 film, EV3.7 (f/1.8, ¼ sec.) to EV17 (f/16, 1/500 sec.)
- ■Flash Synchronization: FP and X synchronization, automatic time lag adjusting type. Direct flash contact on hot shoe plus PC socket on the front of the body
- ■Synchronizing Range: FP class: 1/500—1/125 sec., 1/30 sec. or under. Speedlite: 1/60 sec. or under. M, MF class: 1/30 sec. or under
- ■Film Loading: by opening back cover. Accepts any standard 35mm film in cartridge; loading via multi-slotted film take-up spool
- ■Winding Lever: single-stroke operation, 174°; ratchet winding possible
- ■Film Rewinding: performed by rewind crank and button
- ■Frame Counter: self-resetting type, activated by opening back cover
- ■Size: 144x93x43mm (5-11/16"x3-11/16"x1-11/16") body only 144x93x81.5mm (5-11/16"x3-11/16"x3-3/16") body with FD 50mm f/1.8 lens
- ■Weight: 680g (1 lb. 5 oz.) body only
 - 890g (1 lb. 12 oz.) with FD 50mm f/1.8 lens

IACCESSORIES

VIEWFINDERS AND ACCESSORIES

CODE NO.	DESCRIPTION
5-40701-22	Magnifier S
5-41041-00	Magnifier Adaptor S
5-40712-00	Angle Finder A-2
5-40711-00	Angle Finder B
5-59212-00	Eye Cup 4S

DIOPTRIC ADJUSTMENT LENSES

5-05072-00	Dioptric Adjustment Lens S (+3)
5-05073-00	Dioptric Adjustment Lens S (+2)
5-05051-00	Dioptric Adjustment Lens S (+1.5)
5-05075-00	Dioptric Adjustment Lens S (+1)
5-05076-00	Dioptric Adjustment Lens S (+0.5)
5-05041-00	Dioptric Adjustment Lens S (0)
5-05078-00	Dioptric Adjustment Lens S (-0.5)
5-05079-00	Dioptric Adjustment Lens S (-2)
5-05081-00	Dioptric Adjustment Lens S (-3)
5-05082-00	Dioptric Adjustment Lens S (-4)

GADGET BAGS

MISCELLANEOUS ACCESSORIES

5-03111-00	Camera Holder F
5-63061-00	Release 30
5-63062-00	Release 50
5-64017-00	Self Timer 8

CASES

4-60901-01 Case S for TX

MACROPHOTO & CLOSE-UP ACCESSORIES

4-20601-20	Copy Stand 4
4-25901-03	Handy Stand F55 set
4-26201-20	Photo Micro Unit F
4-25117-00	Macro Hood
4-25501-00	Microphoto Hood
4-25301-01	Extention Tube ABC Set
4-25301-00	Extension Tube A
4-25302-00	Extension Tube B

CODE NO.	DESCRIPTION	
4-25303-00	Extension Tube C	
4-25304-00	Extension Tube 25	
4-25305-00	Extension Tube 50	
4-25311-00	Extension Tube 75	
4-25312-00	Extension Tube 100	
4-25313-00	Extension Tube 150	
4-25314-00	Extension Tube 200	
4-25315-00	Extension Tube FL15	
4-25321-00	Extension Tube FL25	
4-25316-01	Extension Tube M Set	
4-25316-00	Extension Tube M5	
4-25317-00	Extension Tube M10	
4-25322-00	Extension Tube M20	
4-25403-00	55 Macrophoto Coupler	
4-25404-00	58 Macrophoto Coupler	
4-25405-00	48 Macrophoto Coupler	
4-25701-00	FL48 Macrophoto Coupler	
4-25711-00	FL58 Macrophoto Coupler	
4-25721-00	FL55 Macrophoto Coupler	
5-42011-00	Lens Mount Converter A	
5-42021-00	Lens Mount Converter B	
5-42031-00	Lens Mount Converter E	
5-42071-00	Lens Mount Converter P	
5-43231-01	58 Close-Up 450	
5-43241-01	58 Close-Up 240	
5-43251-01	48 Close-Up 450	
5-43331-01	48 Close-Up 240	
5-43571-00	55 Close-Up 450	
5-43561-00	55 Close-Up 240	
5-59042-20	Bellows FL	
5-59043-00	Bellows M	
5-59181-00	Slide Duplicator 48	
5-59181-01	Slide Duplicator 55	
43-6370	Attachment Ring 48 for Slide Duplicator	
43-6371	Attachment Ring 55 for Slide Duplicator	
43-6372	Attachment Ring 58 for Slide duplicator	
BODY COVER		
4-52021-00	Camera Cover R-F	
STRAP		

PLEASE NOTE: For further information on accessories please see the sections as follows: Sect. 2: Canon Interchangeable Lenses

Sect. 3: Canon F-1 System and SLR Accessories Sect. 9: Miscellaneous Accessories Cross-Referenced (including Canon Filters, Cases, etc.)

Neck Strap 7 with pad

5-61141-00